## EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

### **Technical Data Sheet**

### Chip LED with Bi-Color(Multi-Color)

#### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Multi-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

#### Descriptions

- The 11-22 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

### **Device Selection Guide**


Chip				
Туре	Material	<b>Emitted</b> Color	Lens Color	
SDR	AlGaInP	Deep - Red	Watan Class	
UVG	AlGaInP	Green	Water Clear	



11-22SDRUVGC/S366/TR8



### **Package Outline Dimensions**

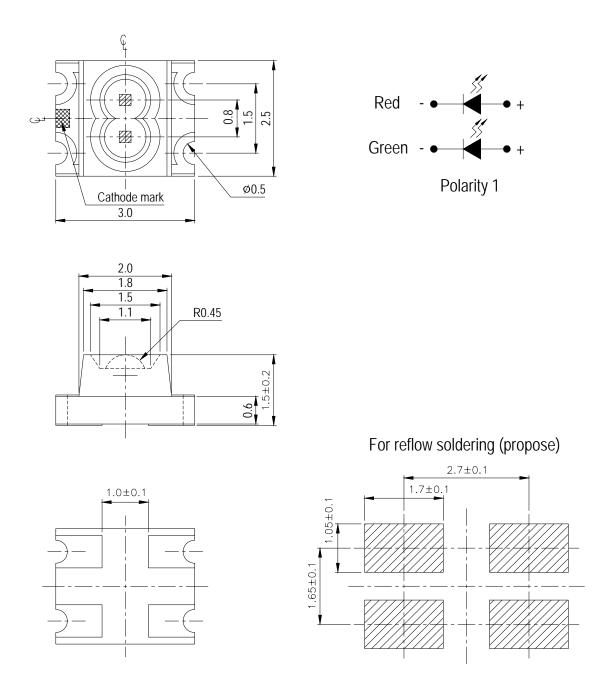

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

http://www.everlight.com Prepared date: 02-May-2006 EVERLIGHT ELECTRONICS CO.,LTD.

### 11-22SDRUVGC/S366/TR8

### Absolute Maximum Ratings (Ta=25°C)

**EVERLIGHT** 

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	IF	SDR:25 UVG:25	mA	
Operating Temperature	Topr	-40 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +90	°C	
Electrostatic Discharge (HBM)	ESD	2000	V	
Power Dissipation	Pd	SDR:60 UVG:60	mW	
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	SDR:60 UVG:60	mA	
Soldering Temperature	Tsol	Reflow Soldering : $260 \degree$ C for 10 sec.Hand Soldering : $350 \degree$ C for 3 sec.		

### Electro-Optical Characteristics (Ta=25°C)

	1 1		t	1		1
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv SDR	72		180 112	mcd	IF=20mA
	UVG	45				
Viewing Angle	2 <del>0</del> 1/2		60		deg	IF=20mA
	$\lambda p$ SDR		650		nm	IF=20mA
Peak Wavelength	UVG		568			
	λd SDR		639		nm	
Dominant Wavelength						IF=20mA
	UVG		565			
Spectrum Radiation Bandwidth	$ riangle \lambda$ SDR		20		nm	
	UVG		20			IF=20mA
Forward Voltage	VF	1.7	2.0	2.4	V	IF=20mA
Reverse Current	Ir			10	$\mu \mathbf{A}$	V <sub>R</sub> =5V

Everlight Electronics Co., Ltd. Device No:DSE-112-A02 http://www.everlight.com

Prepared date: 02-May-2006

Rev 1 Page: 3 of 11

Prepared by: Esther Yan

### SDR

### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
Q1	72	90		IF=20mA
Q2	90	112	,	
R1	112	140	mcd	
R2	140	180		

### UVG

### **Bin Range Of Luminous Intensity**


Bin	Min	Max	Unit	Condition	
P1	45	57			
P2	57	72	1	IF=20mA	
Q2	72	90	mcd		
Q2	90	112			

#### Notes:

#### 1.Tolerance of Luminous Intensity ±10%

### **Typical Electro-Optical Characteristics Curves**


### **SDR**

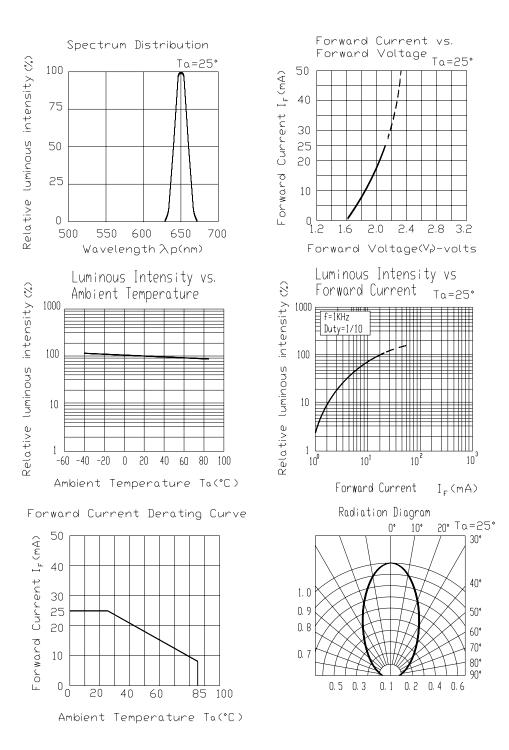

Everlight Electronics Co., Ltd. Device No:DSE-112-A02 http://www.everlight.com Prepared date: 02-May-2006

#### **Typical Electro-Optical Characteristics Curves**

### UVG

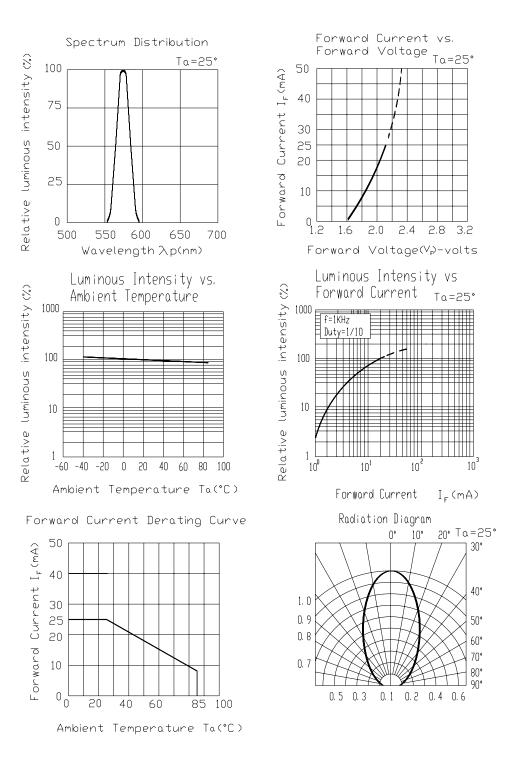

Everlight Electronics Co., Ltd. Device No:DSE-112-A02 http://www.everlight.com Prepared date: 02-May-2006 Rev 1Page: 6 of 11Prepared by: Esther Yan

# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


### 11-22SDRUVGC/S366/TR8

#### Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**




#### **Reel Dimensions**

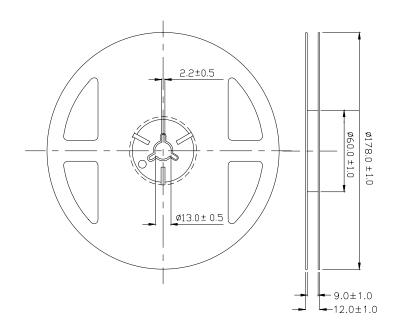

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm ,Unit = mm


http://www.everlight.com Prepared date: 02-May-2006

### Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

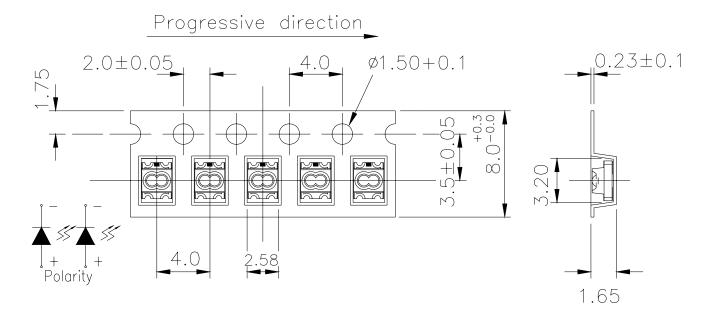

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm ,Unit = mm

### **Moisture Resistant Packaging**

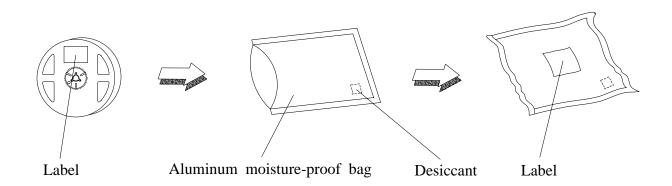

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

### 11-22SDRUVGC/S366/TR8

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min $\int 5 \text{ min}$ L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20  mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
  - 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
  - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5℃ for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

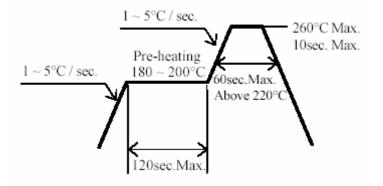


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

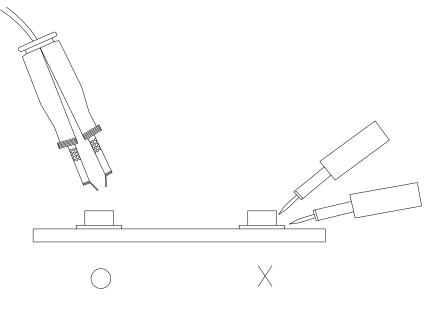

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

Everlight Electronics Co., Ltd. Device No:DSE-112-A02 http://www.everlight.com Prepared date: 02-May-2006 Rev 1 Page: 11 of 11 Prepared by: Esther Yan