

## **Technical Data Sheet**

# **Chip LED with Bi-Color(Multi-Color)**

#### **11-22SRVGC/TR8**

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mulit-color type.
- Pb-free.

#### **Descriptions**


- The 11-22 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

#### **Device Selection Guide**


	Long Colon			
Type	Material	Emitted Color	Lens Color	
SR	AlGaInP	Super Deep-Red		
VG	GaP	Green	Water Clear	

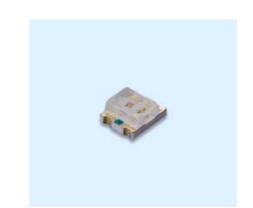



Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 1 of 10

Device No.: DSE-112-091 Prepared date: 21-Mar-2005 Prepared by: Ashley Kuo


# **Package Outline Dimensions**

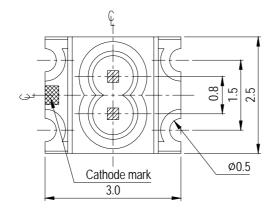




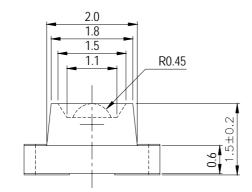

For reflow soldering (propose)

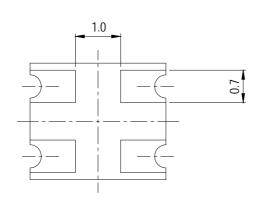

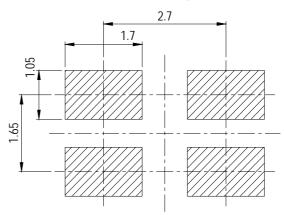

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No. :DSE-112-091

http://www.everlight.com

Prepared date: 21-Mar-2005

Rev. 1

Page: 2 of 11

Prepared by: Ashley Kuo



# **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	IF	SR:40 VG:30	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	260 (for 5 second)	$^{\circ}\mathbb{C}$	
Electrostatic Discharge	ESD	2000	V	
Power Dissipation	Pd	SR:60 VG:100	mW	
Peak Forward Current (Duty 1/10 @1KHz)	IFP	SR:60 VG:60	mA	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec.  Hand Soldering: 350 °C for 3 sec.		

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 11



# **Electro-Optical Characteristics** (Ta=25 $^{\circ}$ C)


Parameter	Symbol		Min.	Тур.	Max.	Unit	Condition
Lumin and Internette	Iv	SR:	18.0	32.0		1	IF=20mA
Luminous Intensity		VG:	14.0	21.0		mcd	
Viewing Angle	2 θ 1/2			60		deg	I <sub>F</sub> =20mA
De de Wessele worth	λр	SR		660		nm	I <sub>F</sub> =20mA
Peak Wavelength		VG		570			
Danin ant Wasslan ath	λd	SR		643		nm	I 20 A
Dominant Wavelength		VG		571			I <sub>F</sub> =20mA
Spectrum Radiation	Δλ	SR		20		nm	I <sub>F</sub> =20mA
Bandwidth		VG		30			
E	$V_{\mathrm{F}}$	SR		2.0	2.4	V	I <sub>F</sub> =20mA
Forward Voltage		VG	1.7	2.1	2.4		
Reverse Current IR				10	$\mu$ A	V <sub>R</sub> =5V	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 4 of 11

Page: 5 of 11


### **Typical Electro-Optical Characteristics Curves**


SR

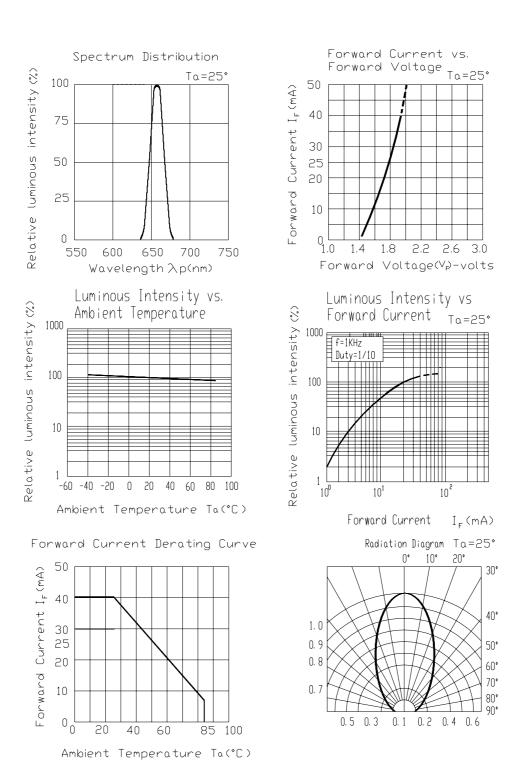



## **Typical Electro-Optical Characteristics Curves**


VG











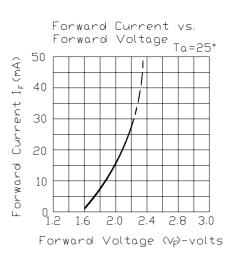





Device No. :DSE-112-091

### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 




#### **Reel Dimensions**

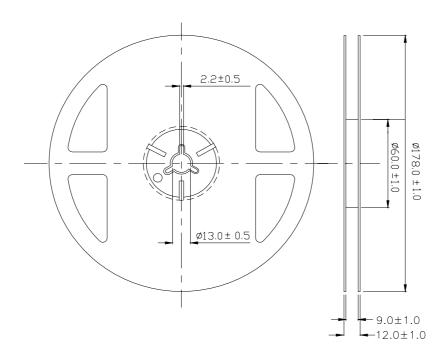

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 7 of 11

#### Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

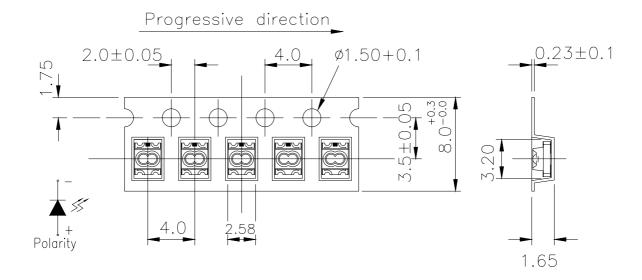

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

## **Moisture Resistant Packaging**

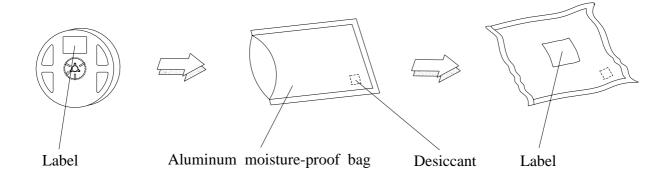

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 8 of 11



# **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int$ 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 9 of 11

#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
- 2.3 After opening the package: The LEDs should be kept at 30°C or less and 70%RH or less(Floor life). However, it's recommended that the LEDs should be used within 168 hours (7 days) after opening the package. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

  Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

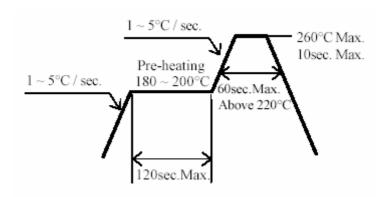

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 10 of 11




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

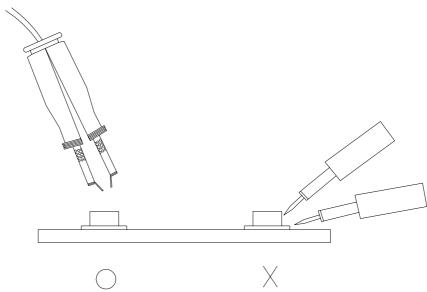

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 11 of 11