

Technical Data Sheet

Right Angle Lens Chip LEDs with Bi-Color (Multi-Color)

12-22/Y2GHC-A01/2C

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Multi-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.




- The 12-22 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in `telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.


Device Selection Guide


Type	Material	Emitted Color	Lens Color	
Y2	AlGaInP	Brilliant Yellow		
GH	InGaN	Brilliant Green	Water Clear	




Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 1 of 11


Package Outline Dimensions














Page: 2 of 11

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
F 10 4	_	Y2:25		
Forward Current	IF	GH:25	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40~ +90	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	260 (for 5 second)	$^{\circ}\!\mathbb{C}$	
	Eap	Y2:2000	X 7	
Electrostatic Discharge	ESD	GH:150	V	
D D' ' '	Pd	Y2:60	***	
Power Dissipation		GH:110	mW	
Peak Forward Current	T	Y2:60	mA	
(Duty 1/10 @1KHz)	IFP	GH:100		
		Reflow Soldering : 260 °C for 10 sec.		
Soldering Temperature	Tsol	Hand Soldering : 350 °C for 3 sec.		

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 11

Device No: Prepared date: 1-Aug-2005 Prepared by: Kenny Wang



Prepared by: Kenny Wang

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol		Min.	Typ.	Max.	Unit	Condition
	Iv	Y2	100	130		1	
Luminous Intensity		GH	150	180		mcd	
Viewing Angle	2 \theta 1/2			120		deg	
D 1 W 1 d	λр	Y2		591		nm	IF=20mA
Peak Wavelength		GH		518			
Dominant Wavelength	λd	Y2		589		 nm	
_		GH		525			
Spectrum Radiation	Δλ	Y2		15		nm	
Bandwidth		GH		35			
Forward Voltage	word Voltage VF	Y2	1.7	2.0	2.4	V	
Torward Voltage		GH	2.7	3.3	3.7	•	
Reverse Current	IR Y2	Y2			10	μ A	V _R =5V
		GH			50		

Notes:

1.Tolerance of Luminous Intensity ±10%


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 4 of 11

Prepared date: 1-Aug-2005

Device No:

Typical Electro-Optical Characteristics Curves

Y2

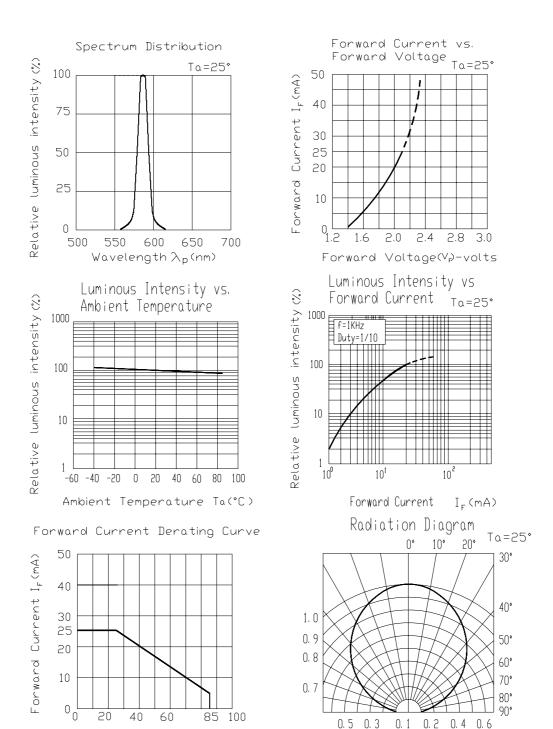


Ambient Temperature Ta(°C)

Prepared by: Kenny Wang

Typical Electro-Optical Characteristics Curves

GH

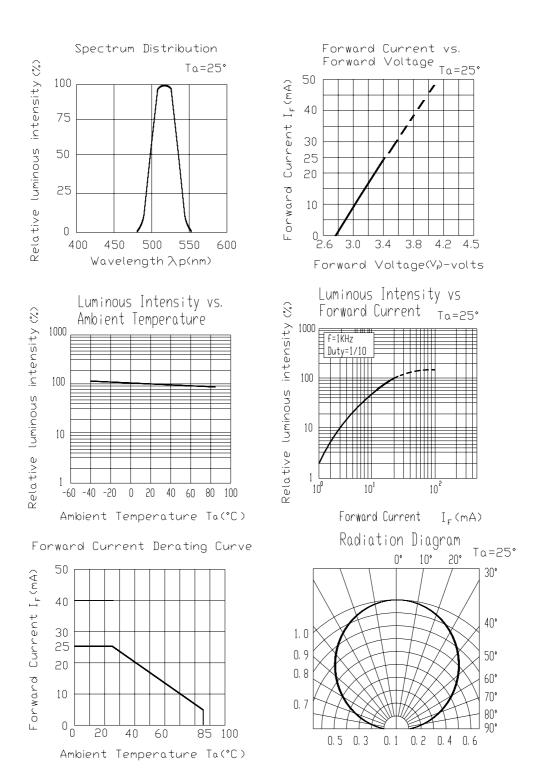


Prepared by: Kenny Wang

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

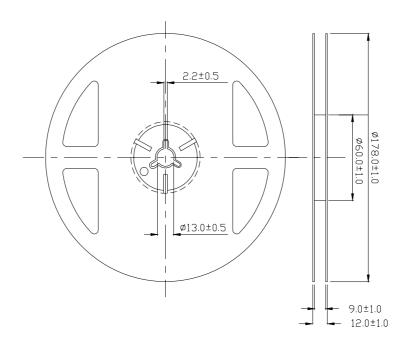


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 7 of 11


Device No: Prepared date: 1-Aug-2005 Prepared by: Kenny Wang

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

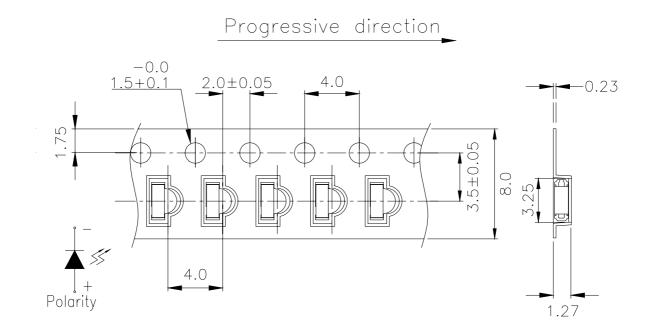

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

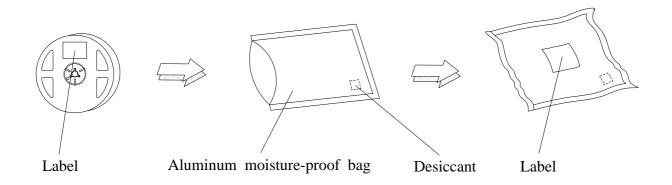

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 8 of 11



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 9 of 11

Device No: Prepared date: 1-Aug-2005 Prepared by: Kenny Wang

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LEDs should be kept at 30°C or less and 70%RH or less(Floor life). However, it's recommended that the LEDs should be used within 168 hours (7 days) after opening the package. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

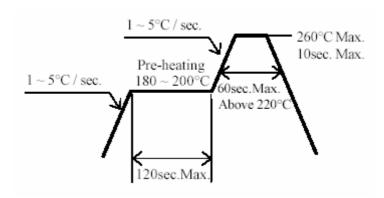

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 10 of 11

Device No: Prepared date: 1-Aug-2005 Prepared by: Kenny Wang




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

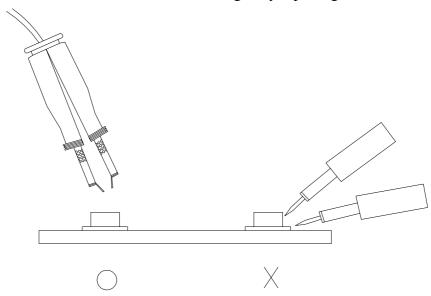

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 11 of 11