

Technical Data Sheet

0805 Package Chip LED (1.0mm Height)

17-21/R8C-AN2Q1B/3T

Features


- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free

Descriptions

- The 17-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications, etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.





Device Selection Guide


DADE N	Chip	E. W. LC.L.	Resin Color	
PART No.	Material	Emitted Color		
17-21/R8C-AN2Q1B/3T	AlGaInP	Deep-red	Water Clear	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 1 of 10


Package Outline Dimensions








For reflow soldering (Propose)





Note: The tolerances unless mentioned are ± 0.1 , unit = mm.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 2 of 10



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	I_{F}	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA	
Power Dissipation	P_{d}	60	mW	
ElectrostaticDischarge (HBM)	ESD	2000	V	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40~ +90	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	Reflow Soldering:260 °C for 10 sec Hand Soldering:350°C for 3 sec		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	$I_{\rm v}$	36.0		90.0	mcd		
Viewing Angle	$2 heta_{1/2}$		140		deg		
Peak Wavelength	λp		650		nm		
Dominant Wavelength	λd	629.5		645.5	nm	I _F =20 mA	
Spectrum Radiation Bandwidth	Δλ		20		nm		
Forward Voltage	V_{F}	1.75		2.35	V		
Reverse Current	I_R			10	μ A	V _R =5V	

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 3 of 10



Bin Rang Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
A	E7	629.5	633.5		IF=20mA
	E8	633.5	637.5		
	E9	637.5	641.5	nm	
	E10	641.5	645.5		

Bin Rang Of Luminous Intensity

Bin	Min	Max	Unit	Condition
N2	36.0	45.0	mcd	IF=20mA
P1	45.0	57.0		
P2	57.0	72.0		
Q1	72.0	90.0		

Bin Rang Of Forward Voltage

Groups	Bin	Min	Max	Unit	Condition
В	0	1.75	1.95		IF=20mA
	1	1.95	2.15	V	
	2	2.15	2.35		

Notes:


1. Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 4 of 10

Typical Electro-Optical Characteristics Curves

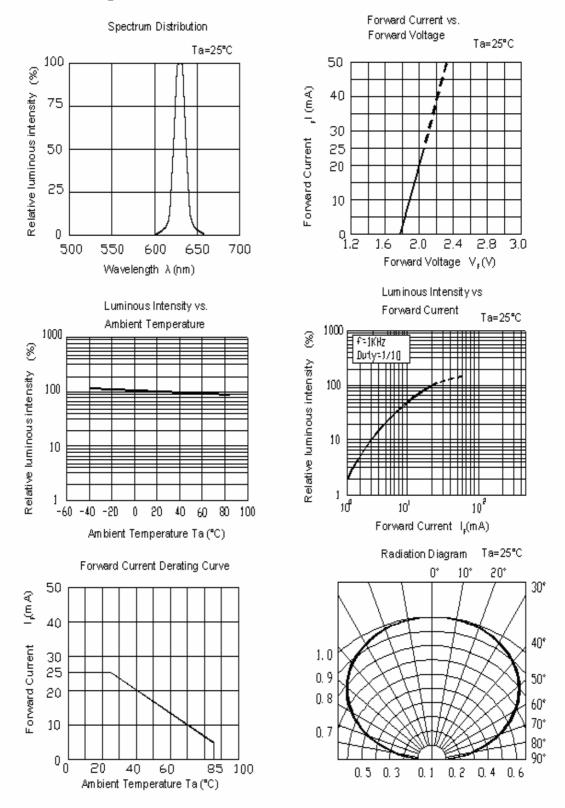


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 5 of 10

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

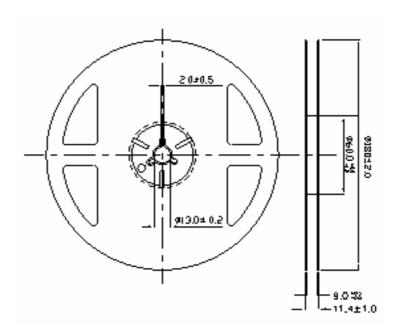


Note: The tolerances unless mentioned are ± 0.1 , unit = mm.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 6 of 10




Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

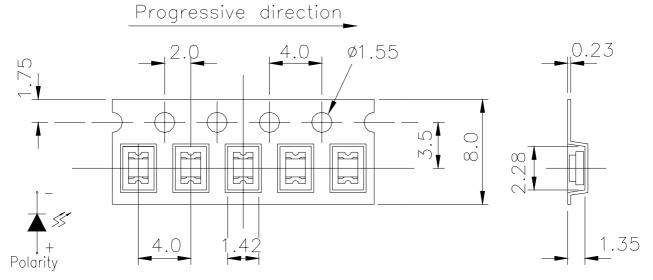

Note: The tolerances unless mentioned are ± 0.1 , unit = mm.

Moisture Resistant Packaging

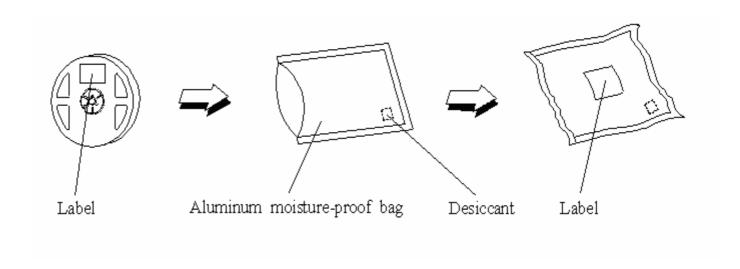

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 7 of 10



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : $240^{\circ}\text{C}\pm5^{\circ}\text{C}$ Min.5 sec.	6 min.	22 Pcs.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min. \int 5 min. $L: -40^{\circ}\mathbb{C}$ 15min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min. $\int 10 \text{ sec.}$ $L: -10^{\circ}\mathbb{C}$ 5min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 Hrs.	22 Pcs.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 8 of 10

Precautions For Use

1. Over-current-proof


Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH orless. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: $60\pm5^{\circ}$ C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

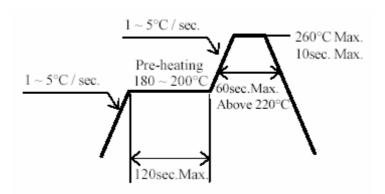

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 9 of 10




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

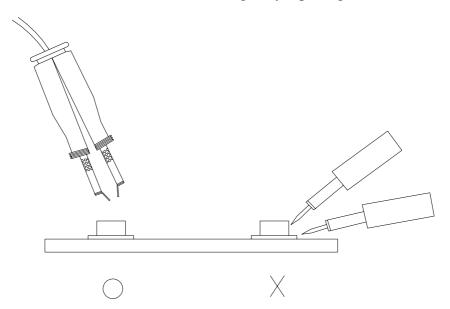

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 10 of 10