VERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

0603 Package Chip LED(0.8mm Height)

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow

solder process.

- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version.

Descriptions

- The 19-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

Device Selection Guide


D. AN			
Part No.	Material	Emitted Color	Lens Color
19-21/R8C-AL1M2VY/3T	AlGaInP	Deep-Red	Water Clear



19-21/R8C-AL1M2VY/3T



Package Outline Dimensions

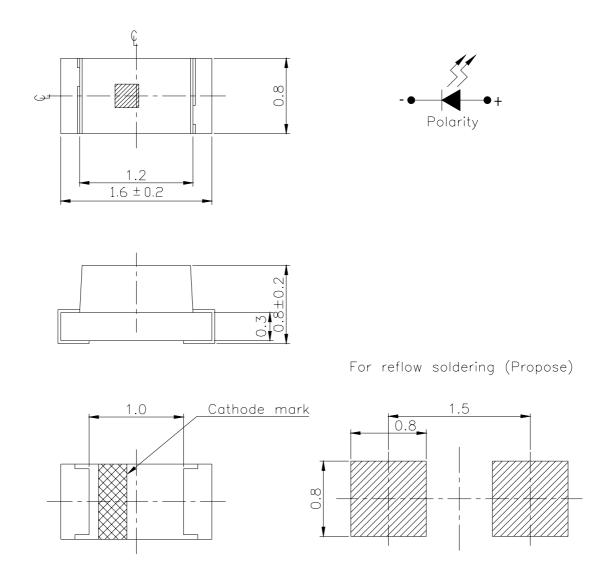

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

http://www.everlight.com Prepared date: 14-Nov-2005 EVERLIGHT ELECTRONICS CO.,LTD.

19-21/R8C-AL1M2VY/3T

Absolute Maximum Ratings (Ta=25°C)

EVERLIGHT

Absolute Maximum Ratings (1a=23 C)					
Parameter	Symbol	Rating	Unit		
Reverse Voltage	VR	5	V		
Forward Current	$I_{ m F}$	25	mA		
Operating Temperature	Topr	-40 ~ +85	°C		
Storage Temperature	Tstg	-40 ~ +90	°C		
Electrostatic Discharge(HBM)	ESD	2000	V		
Power Dissipation	Pd	60	mW		
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA		
Soldering Temperature	Tsol	Reflow Soldering : $260 \degree C$ for 10 sec Hand Soldering : $350 \degree C$ for 3 sec.			

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	I _V	11.5		28.5	mcd		
Peak Wavelength	λp		650		nm		
Dominant Wavelength	λd	629.5		645.5	nm		
Spectrum Radiation Bandwidth	$ riangle \lambda$		20		nm	I _F =5mA	
Viewing Angle	2 <i>θ</i> 1/2		100		deg		
Forward Voltage	V_{F}	1.70		2.20	V		
Reverse Current	I _R			10	μA	V _R =5V	

Notes:

1.Tolerance of Luminous Intensity ±10%

- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. Device No: SZDSE-191-R07 http://www.everlight.com Prepared date: 14-Nov-2005

Prepared by: Wu xiaowei

Rev.1

EVERLIGHT ELECTRONICS CO.,LTD.

19-21/R8C-AL1M2VY/3T

Bin Range Of Dom. Wavelength

ÆRLIGHT

Group	Bin	Min	Max	Unit	Condition	
A	E7	629.5	633.5			
	E8	633.5	637.5		I _F =5mA	
	E9	637.5	641.5	nm		
	E10	641.5	645.5			

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
L1	11.5	14.5	mcd	I _F =5mA
L2	14.5	18.0		
M1	18.0	22.5		
M2	22.5	28.5		

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition	
V	19	1.70	1.80			
	20	1.80	1.90	v	I _F =5mA	
	21	1.90	2.00			
	22	2.00	2.10			
	23	2.10	2.20			

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.05V

EVERLIGHT ELECTRONICS CO., LTD.

19-21/R8C-AL1M2VY/3T

Typical Electro-Optical Characteristics Curves

EVERLIGHT

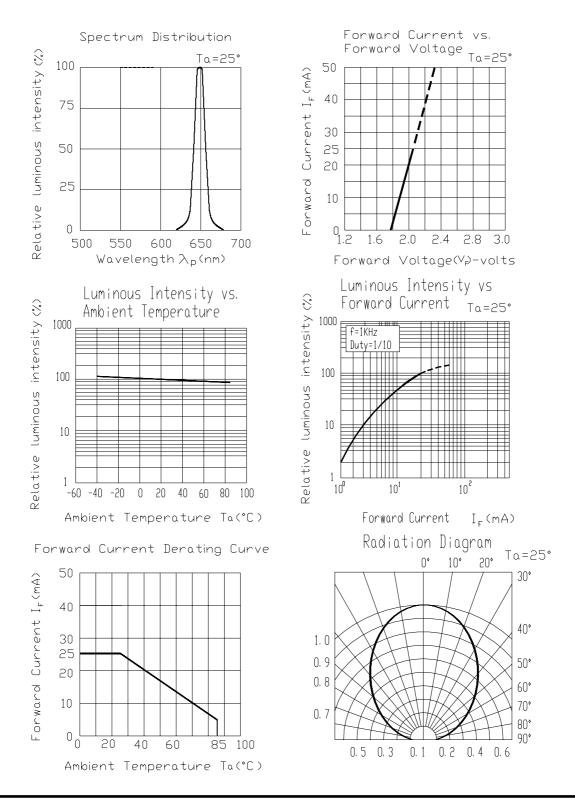

Everlight Electronics Co., Ltd. Device No: SZDSE-191-R07 http://www.everlight.com Prepared date: 14-Nov-2005 Rev.1 Page: 5 of 10 Prepared by: Wu xiaowei

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

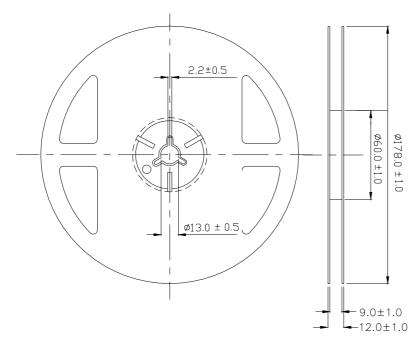


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No: SZDSE-191-R07 http://www.everlight.com Prepared date: 14-Nov-2005 Rev.1 Page: 6 of 10 Prepared by: Wu xiaowei EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


19-21/R8C-AL1M2VY/3T

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

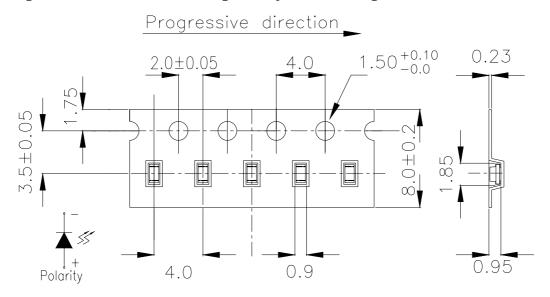

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

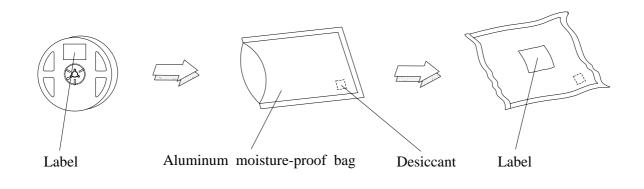

Everlight Electronics Co., Ltd. Device No: SZDSE-191-R07 http://www.everlight.com Prepared date: 14-Nov-2005

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min \int 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30° C or less and 90%RH or less.
 - 2.3 The LEDs should be used within a year.
 - 2.4 After opening the package, the LEDs should be kept at 30° C or less and 60%RH or less.
 - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
 - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

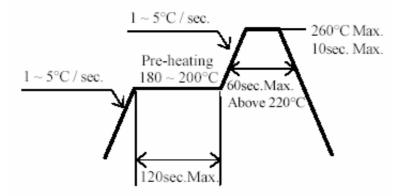


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

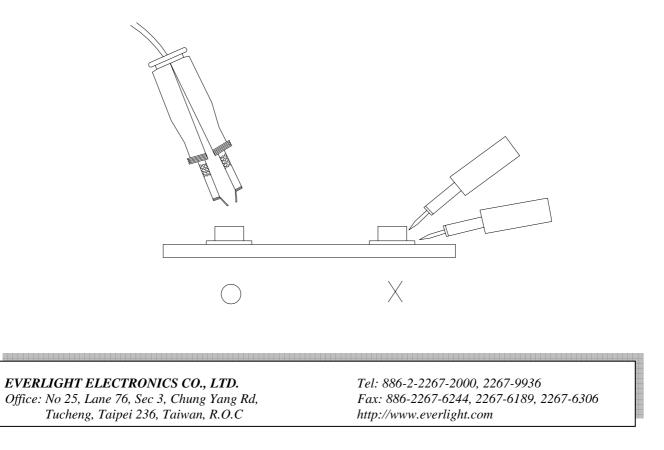

http://www.everlight.com Prepared date: 14-Nov-2005