# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

## **Technical Data Sheet**

## 0603 Package Chip LED(0.6mm Height)

#### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version

#### Descriptions

- The 19-213 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

#### **Device Selection Guide**


De 14 No		Lana Calan	
Part No.	Material	<b>Emitted Color</b>	Lens Color
19-213/S3C-AN2P2B/3T	AlGaInP	Reddish Orange	Water Clear



19-213/S3C-AN2P2B/3T



### **Package Outline Dimensions**

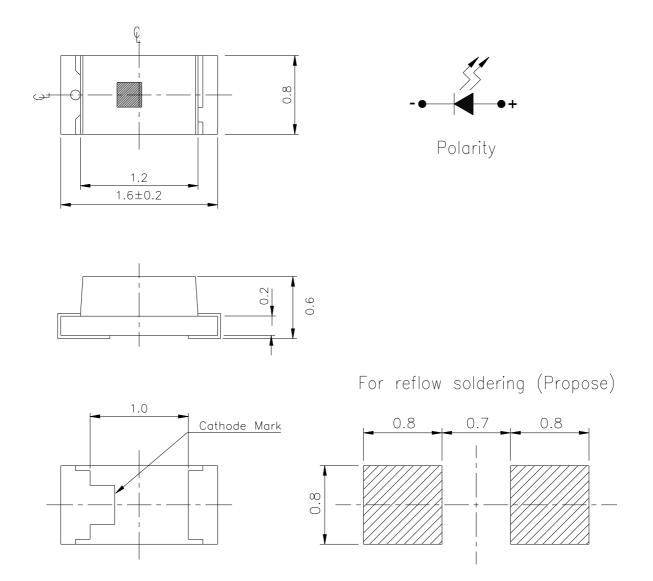

**Note:** Tolerances Unless Dimension is  $\pm 0.1$  mm ,Unit = mm

http://www.everlight.com Prepared date:7-Aug-2006

Absolute Maximum Ratings (Ta=25°C)						
Parameter	Symbol	Rating	Unit			
Reverse Voltage	VR	5	V			
Forward Current	IF	25	mA			
Peak Forward Current (Duty 1/10 @1KHz)	IFP	60	mA			
Power Dissipation	Pd	60	mW			
Electrostatic Discharge(HBM)	ESD	2000	V			
Operating Temperature	Topr	-40 ~ +85	°C			
Storage Temperature	Tstg	-40~ +90	°C			
Soldering Temperature	Tsol	Reflow Soldering : 260 $^{\circ}$ C for 10 sec. Hand Soldering : 350 $^{\circ}$ C for 3 sec.				

## Electro-Optical Characteristics (Ta=25°C)

					-	
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	36.0		72.0	mcd	
Viewing Angle	2 <i>θ</i> 1/2		120		deg	
Peak Wavelength	λp		621		nm	
Dominant Wavelength	λd	605.5		621.5	nm	I <sub>F</sub> =20mA
Spectrum Radiation Bandwidth	$ riangle \lambda$		18		nm	
Forward Voltage	$V_{\mathrm{F}}$	1.75		2.35	V	
Reverse Current	I <sub>R</sub>			10	$\mu$ A	Vr=5V

#### Notes:

- 1. Tolerance of Luminous Intensity ±10%
- 2. Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage ±0.1V

EVERLIGHT ELECTRONICS CO.,LTD.

## <u>19-213/S3C-AN2P2B/3T</u>

#### **Bin Range Of Dom. Wavelength**

EVERLIGHT

Group	Bin	Min	Max	Unit	Condition	
А	E1	605.5	609.5			
	E2	609.5	613.5	nm	I <sub>F</sub> =20mA	
	E3	613.5	617.5			
	E4	617.5	621.5			

#### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
N2	36.0	45.0		
P1	45.0	57.0	mcd	I <sub>F</sub> =20mA
P2	57.0	72.0		

#### **Bin Rang Of Forward Voltage**


Group	Bin	Min	Max	Unit	Condition
	0	1.75	1.95		
В	1	1.95	2.15	V	I <sub>F</sub> =5mA
	2	2.15	2.35		

#### Notes:

- 1. Tolerance of Luminous Intensity ±10%
- 2. Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage ±0.1V

EVERLIGHT ELECTRONICS CO., LTD.

### <u>19-213/S3C-AN2P2B/3T</u>

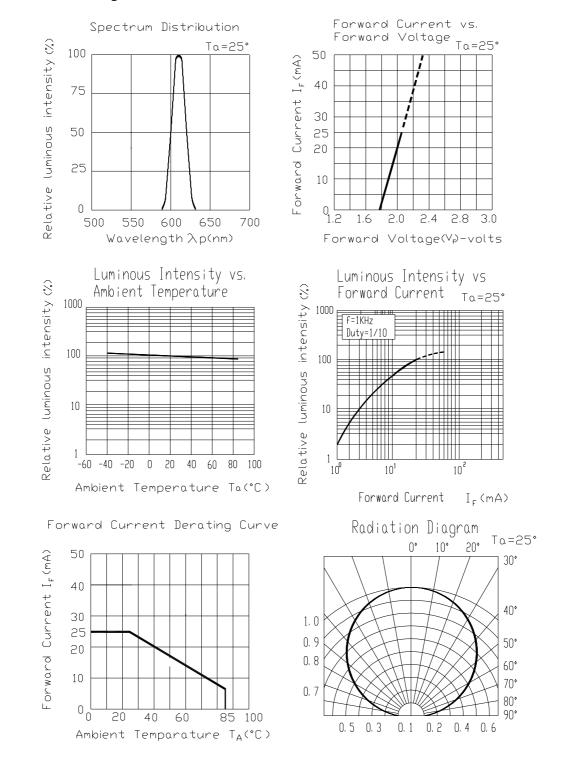

#### **Typical Electro-Optical Characteristics Curves**

**EVERLIGHT** 

Everlight Electronics Co., Ltd. Device No:SZDSE-193-S08 http://www.everlight.com Prepared date:7-Aug-2006 Rev 1 Page: 5 of 10 Prepared by: Robbin

# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


### <u>19-213/S3C-AN2P2B/3T</u>

#### Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**




#### **Reel Dimensions**

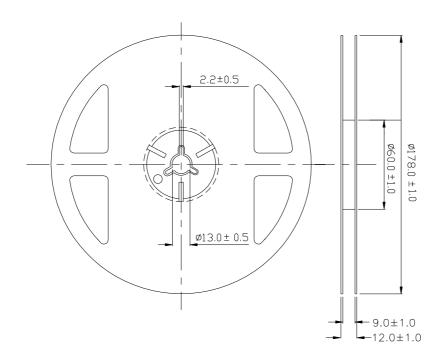

**Note:** The tolerances unless mentioned are  $\pm 0.1$ , Unit = mm.


Everlight Electronics Co., Ltd. Device No:SZDSE-193-S08 http://www.everlight.com Prepared date:7-Aug-2006 Rev 1 Page: 6 of 10 Prepared by: Robbin

## Loaded quantity 3000 PCS per reel

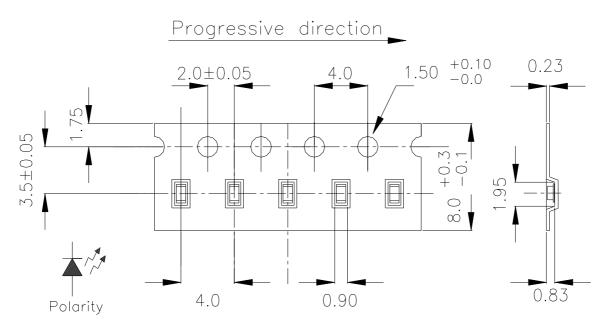

**Note:** Tolerances Unless Dimension is  $\pm 0.1$  mm, Unit = mm

### **Moisture Resistant Packaging**

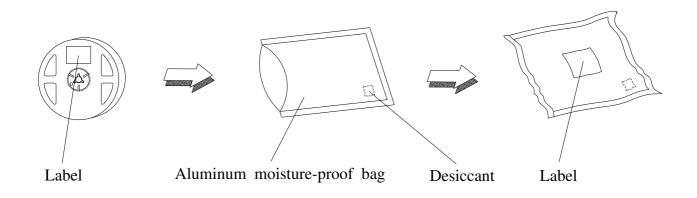

http://www.everlight.com Prepared date:7-Aug-2006

## <u>19-213/S3C-AN2P2B/3T</u>

## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5 sec.	6 min.	22 Pcs.	0/1
2	Temperature Cycle	H : +100°C 15min. ∫ 5 min. L : -40°C 15min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	H : +100°C 5min. $\int$ 10 sec. L : -10°C 5min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85℃/R.H85%	1000 Hrs.	22 Pcs.	0/1

#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package: The LEDs should be kept at  $30^\circ$ C or less and 90%RH or less.
  - 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
  - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

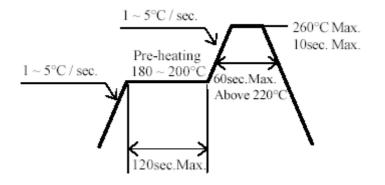


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

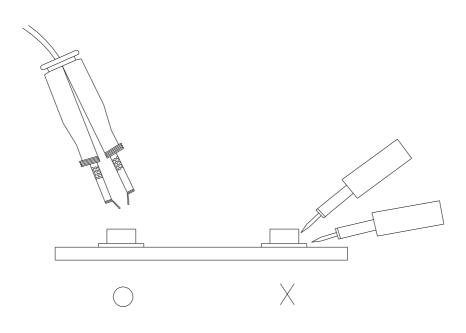

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

Everlight Electronics Co., Ltd. Device No:SZDSE-193-S08 http://www.everlight.com Prepared date:7-Aug-2006 Rev 1 Page: 10 of 10 Prepared by: Robbin