

# **Technical Data Sheet**

# 0603 Package Chip LED (0.8mm Height)

# 19-21/Y2C-CQ1R1L/3T

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-Free.
- The product itself will remain within RoHS compliant version.

### **Descriptions**

- The 19-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

#### **Device Selection Guide**

Everlight Electronics Co., Ltd.

D (N			
Part No.	Material	<b>Emitted Color</b>	Lens Color
19-21/Y2C-CQ1R1L/3T	AlGaInP	Brilliant Yellow	Water Clear



Device No: SZDSE-191-Y05


http://www.everlight.com

Prepared date: 07-27-2005 Prepared by: Mao-Jinru


Rev.2

Page: 1 of 10


# **Package Outline Dimensions**







For reflow soldering

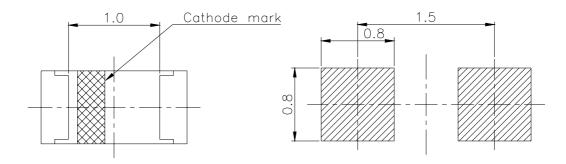

**Note:** The tolerances unless mentioned are  $\pm 0.1$ , unit = mm.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 2 of 10



# EVERLIGHT ELECTRONICS CO., LTD.

# 19-21/Y2C-CQ1R1L/3T

# **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 seconds)	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	60	mA

# **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	72.0		140.0	mcd	
Peak Wavelength	λр		591		nm	
Dominant Wavelength	λd	585.5		591.5	nm	
Spectrum Radiation Bandwidth	Δλ		15		nm	IF=20mA
Viewing Angle	2 \theta 1/2		100		deg	
Forward Voltage	VF	1.70		2.30	V	
Reverse Current	Ir			10	$\mu$ A	V <sub>R</sub> =5V

#### **Notes:**

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage  $\pm 0.05V$

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 3 of 10



### Bin Rang Of Dom. Wavelength

Groups	Bin	Min	Max	Unit	Condition
С	D3	585.5	588.5		I 20 A
	D4	588.5	591.5	nm	IF=20mA

# **Bin Rang Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
Q1	72.0	90.0		
Q2	90.0	112.0	mcd	IF=20mA
R1	112.0	140.0		

# **Bin Rang Of Forward Voltage**


Groups	Bin	Min	Max	Unit	Condition	
L	19	1.70	1.80			
	20	1.80	1.90	V	IF=20mA	
	21	1.90	2.00			
	22	2.00	2.10			
	23	2.10	2.20			
	24	2.20	2.30	]		

#### **Notes:**

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 4 of 10

# **Typical Electro-Optical Characteristics Curves**

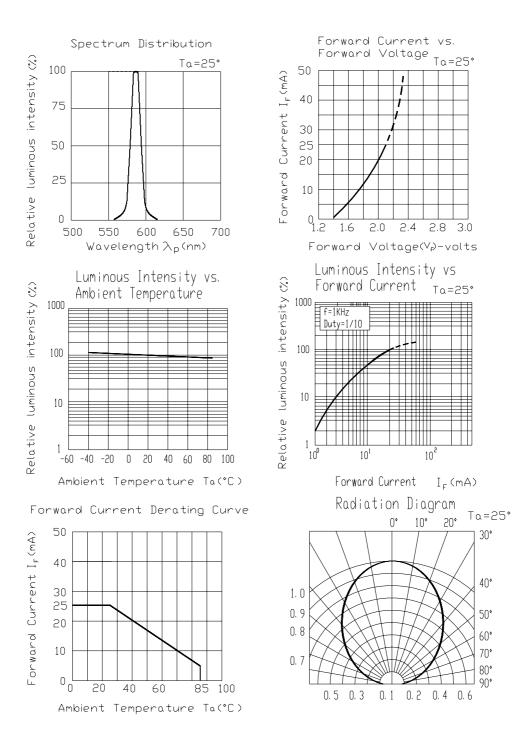

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 5 of 10

# Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

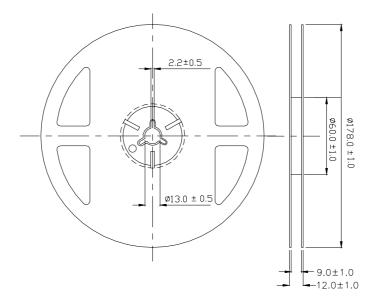


**Note:** The tolerances unless mentioned are  $\pm 0.1$ , unit = mm.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 6 of 10




# Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

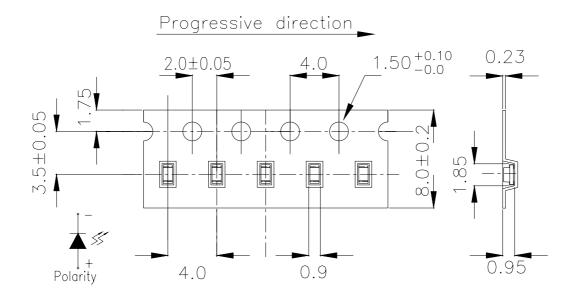

**Note:** The tolerances unless mentioned are  $\pm 0.1$ , unit = mm.

### **Moisture Resistant Packaging**

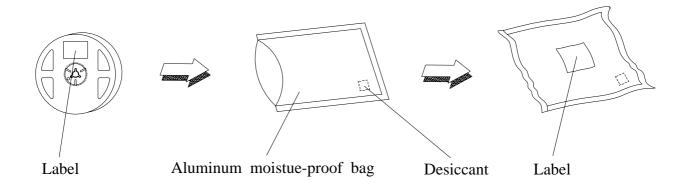

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 7 of 10



# **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min		0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int$ 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%R.H.	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 8 of 10

#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

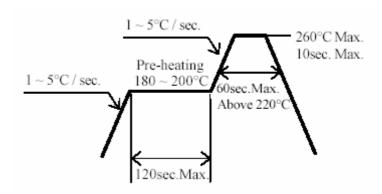

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $280^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 9 of 10

Device No: SZDSE-191-Y05 Prepared date: 07-27-2005 Prepared by: Mao-Jinru



#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

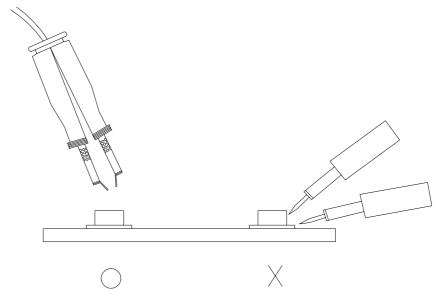

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 10 of 10