

Technical Data Sheet

Reverse Package Chip LED

25-21/BHC-YN1Q1TY/2A

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.

Descriptions


- The 25-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Part No.	C		
	Material	Emitted Color	Lens Color
25-21/BHC-YN1Q1TY/2A	InGaN	Blue	Water Clear




Everlight Electronics Co., Ltd.

Device No:DSE-251-

http://www.everlight.com Prepared date: 05-27-2004 Rev 1.0

Page: 1 of 10

Package Outline Dimensions

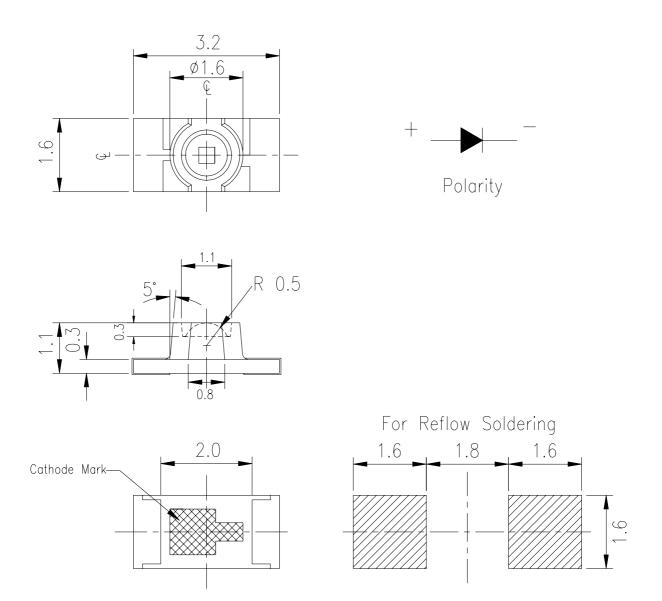

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:DSE-251-

http://www.everlight.com Prepared date: 05-27-2004 Rev 1.0

Page: 2 of 10



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\! \mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 seconds)	$^{\circ}$
Electrostatic Discharge	ESD	150	V
Power Dissipation	Pd	110	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA

Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	28.5		90.0	mcd	
Peak Wavelength	λp		468		nm	
Dominant Wavelength	λd	470		475	nm	I- 6 A
Spectrum Radiation Bandwidth	Δλ		25		nm	IF=5mA
Viewing Angle	2 \theta 1/2		60		deg	
Forward Voltage	$V_{\rm F}$	2.6		3.0	V	
Reverse Current	IR			50	μ A	V _R =5V

Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd.

Device No:DSE-251- Prepared date: 05-27-2004 Prepared by: Jeff Tsai

http://www.everlight.com

Rev 1.0

Page: 3 of 10

Bin Rang Of Dom. Wavelength

Bin	Min	Max	Unit	Condition
Y	470.0	475.0	nm	IF=5mA

Bin Rang Of Luminous Intensity

		<u>v</u>		
Bin	Min	Max	Unit	Condition
N1	28.5	36.0		
N2	36.0	45.0		
P1	45.0	57.0	mcd	IF=5mA
P2	57.0	72.0		
Q1	72.0	90.0		

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition	
Т	28	2.6	2.7	-	I- 5 A	
	29	2.7	2.8			
	30	2.8	2.9	V	IF=5mA	
	31	2.9	3.0			

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.05V


Everlight Electronics Co., Ltd.


Device No:DSE-251-


http://www.everlight.com Prepared date: 05-27-2004 Rev 1.0


Page: 4 of 10


Typical Electro-Optical Characteristics Curves














Prepared date: 05-27-2004 Prepared by: Jeff Tsai

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

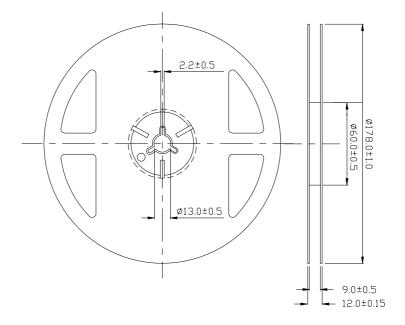

Note: Tolerances Unless Dimension ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:DSE-251-


Prepared date: 05-27-2004

http://www.everlight.com

Rev 1.0


Page: 6 of 10

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

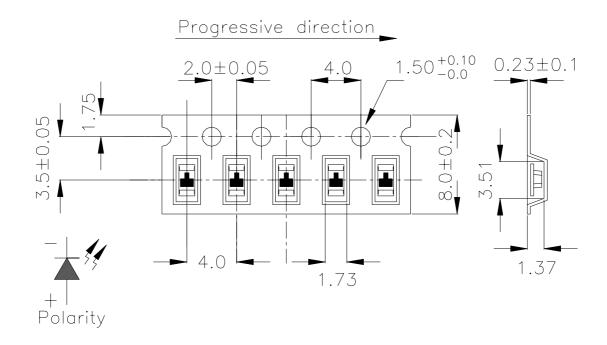

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

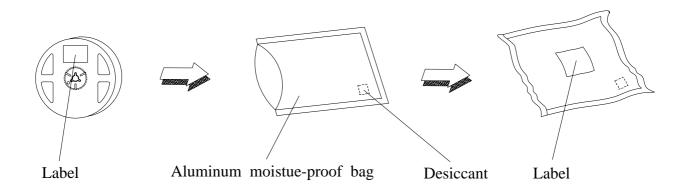

Everlight Electronics Co., Ltd. Device No:DSE-251-

http://www.everlight.com Prepared date: 05-27-2004 Rev 1.0

Page: 7 of 10



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:DSE-251-

http://www.everlight.com Prepared date: 05-27-2004 Rev 1.0

Page: 8 of 10

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 The LEDs should be used within a year.
 - 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
 - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
 - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

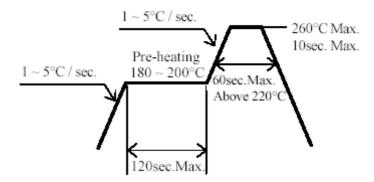

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Rev 1.0


Page: 9 of 10

Everlight Electronics Co., Ltd. http://www.everlight.com Device No:DSE-251-Prepared date: 05-27-2004 Prepared by: Jeff Tsai



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

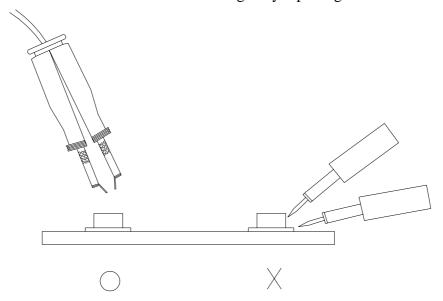

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1.0 Page: 10 of 10

Device No:DSE-251- Prepared date: 05-27-2004 Prepared by: Jeff Tsai