

# Technical Data Sheet TOP Views LEDs

#### 67-21UYOC/S400-XX/TR8

#### **Features**

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb Free
- The product itself will remain within RoHS compliant version.



• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes it ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

#### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

#### **Device Selection Guide**

	Lens Color	
Material	Emitted Color	Lens Color
AlGaInP	Super Yellow Orange	Water Clear





verlight Electronics Co., Ltd. http://www.everlight.com Rev. 2.2 Page: 1 o10


Device No.: DSE-671-164 prepared date:07-29-2005 Prepared by: Bennett


# 67-21UYOC/S400-XX/TR8


### **Package Dimensions**














**Notes:** .All dimensions are in millimeters



### 67-21UYOC/S400-XX/TR8

## Absolute Maximum Ratings (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	$ m I_F$	50	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	-40~ +100	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 second)	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	120	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	$I_{\mathrm{FP}}$	100	mA

Rev. 2.2

Prepared by: Bennett

Page: 3 o10



### 67-21UYOC/S400-XX/TR8

**Electro-Optical Characteristics (Ta=25°C)** 

Parameter	Symbol	*Chip Rank	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	$ m I_{ m V}$	A3	40	76			
		A4	63	95		mcd	IF=20mA
		A5	80	123			
		A6	100	154			
		A7	125	189			
		A8	162	196			
		A9	186	223			
		A10	220	270			
		A11	260	350			
Viewing Angle	2 \theta 1/2			120		deg	IF=20mA
Peak Wavelength	λр			611		nm	IF=20mA
Dominant Wavelength	λd			605		nm	IF=20mA
Spectrum Radiation Bandwidth	Δλ			17		nm	I <sub>F</sub> =20mA
Forward Voltage	$V_{\mathrm{F}}$			2.0	2.4	V	I <sub>F</sub> =20mA
Reverse Current	Ir				10	$\mu$ A	V <sub>R</sub> =5V

\*67-21UYOC/S400-XX/TR8




Chip Rank


verlight Electronics Co., Ltd. Device No. : DSE-671-164 http://www.everlight.com prepared date:07-29-2005 Rev. 2.2


Page: 4 o10


#### 67-21UYOC/S400-XX/TR8


#### **Typical Electro-Optical Characteristics Curves**
















#### 67-21UYOC/S400-XX/TR8

#### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

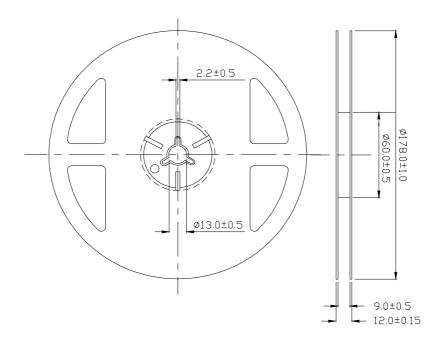


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm




### 67-21UYOC/S400-XX/TR8

#### Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

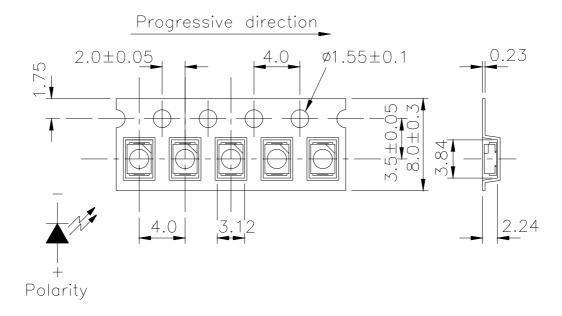

Note: The tolerances unless mentioned is  $\pm 0.1$ mm Unit = mm

#### **Moisture Resistant Packaging**

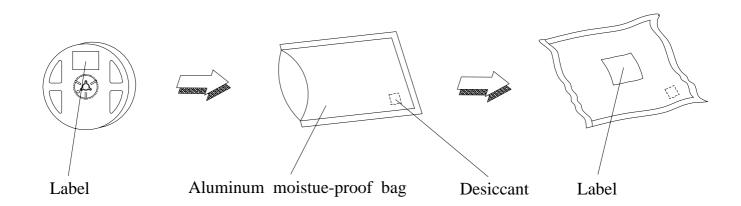

verlight Electronics Co., Ltd.

Device No.: DSE-671-164

http://www.everlight.com prepared date:07-29-2005 Rev. 2.2

Page: 7 o10



### 67-21UYOC/S400-XX/TR8

#### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int$ 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

verlight Electronics Co., Ltd. http://www.everlight.com Rev. 2.2 Page: 8 o10

Device No.: DSE-671-164 prepared date:07-29-2005 Prepared by: Bennett



#### 67-21UYOC/S400-XX/TR8

#### **Precautions For Use**

1. Over-current-proof


Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

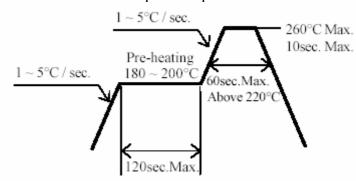

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Page: 9 o10




#### 67-21UYOC/S400-XX/TR8

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $280^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

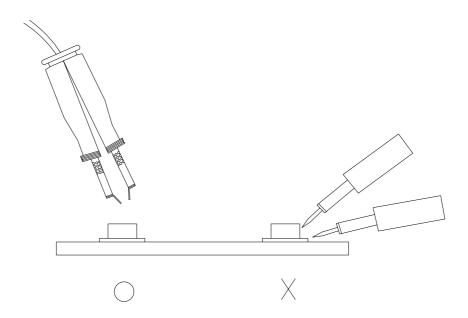

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

verlight Electronics Co., Ltd. http://www.everlight.com Rev. 2.2 Page: 10 o10

Device No.: DSE-671-164 prepared date:07-29-2005 Prepared by: Bennett