# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

## **Technical Data Sheet (Prelminary)**

## White SMD Surface Mount Device

### Features

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Emission Color:x=0.29,y=0.30
- Pb-free

## Descriptions

The white LED which was fabricated using a blue LED and a phosphor, and the phosphor is excited by blue light and emits yellow fluorescence. The mixture of blue light and yellow light results in a white emission.

## Applications

- OA Equipment
- Backlighting of Full Color LCD
- Automotive Equipment
- Replacement of Conventional Light Bulbs and Fluorescent Lamps

## **Device Selection Guide**


	Chip		
Material	<b>Emitted Color</b>	Lens Color	
InGaN	White	Water Clear	



67-23B UWC/TR8



## **Package Outline Dimensions**

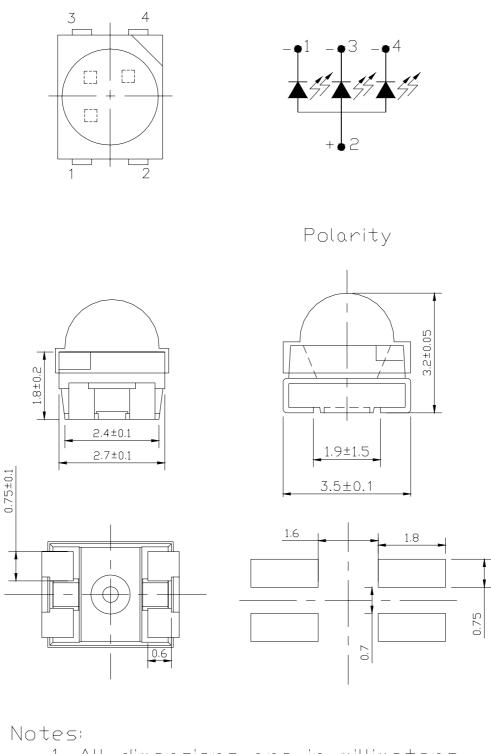

1. All dimensions are in millimeters 2. tolerance Unless DImension=±0.05mm

Everlight Electronics Co., Ltd. Device No. :

http://www.everlight.com Prepared date:20-Jan-05 Rev. 1.0Page: 2 of 10Prepared by: Forrest Chen

67-23B UWC/TR8

# **EVERLIGHT** EVERLIGHT ELECTRONICS CO.,LTD.

## 67-23B UWC/TR8

(12-22-0)					
Parameter	Symbol	Rating	Unit		
Reverse Voltage	Vr	5	V		
Operating Temperature	Topr	-40 ~ +85	°C		
Storage Temperature	Tstg	-40~ +100	°C		
Soldering Temperature	Tsol	260 (for 5 second)	°C		
Electrostatic Discharge	ESD	150	V		
Power Dissipation	Pd	110	mW		
*Forward Current	IF	25	mA		
*Peak Forward Current(Duty 1/10 @ 1KHz)	$I_{FP}$	100	mA		

\*. Maximum forward current for each die.

## Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Units	Condition
Luminous Intensity	Iv	1600	1950		mcd	I <sub>F</sub> =60mA
Forward Voltage	V <sub>F</sub>		3.5	4.0	V	I <sub>F</sub> =20mA
Reverse Current*1	I <sub>R</sub>			50	$\mu A$	V <sub>R</sub> =5V
Viewing Angle	2 <del>0</del> 1/2		60		deg	I <sub>F</sub> =60mA

\*1 For each die.

The products are sensitive to static electricity and care must be fully taken when handling products.

# EVERLIGHT ELECTRONICS CO., LTD.

## **Color Ranks**

	Rank A0			
х	0.280	0.264	0.283	0.296
у	0.248	0.267	0.305	0.276

	B4			
х	0.307	0.304	0.330	0.330
у	0.315	0.330	0.360	0.339

	B6			
X	0.311	0.307	0.330	0.330
У	0.294	0.315	0.339	0.318


## **CIE Chromaticity Diagram**



	B3				
Х	0.287	0.283	0.304	0.307	
у	0.295	0.305	0.33	0.315	

	B5			
Х	0.296	0.287	0.307	0.311
у	0.276	0.295	0.315	0.294

	Rank C0				
X	0.330	0.330	0.361	0.356	
у	0.318	0.360	0.385	0.351	

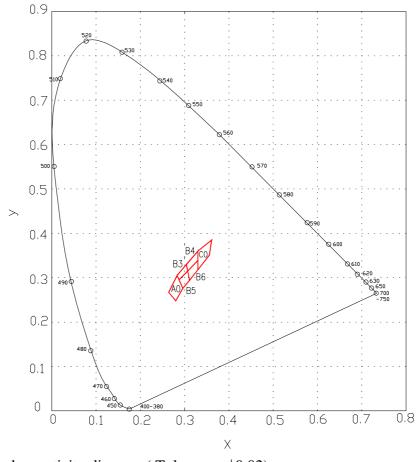


\*The C.I.E. 1931 chromaticity diagram ( Tolerance  $\pm 0.02$ ).

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Prepared date:20-Jan-05 Rev. 1.0 Page: 4 of 10 Prepared by: Forrest Chen EVERLIGHT ELECTRONICS CO., LTD.

#### 67-23B UWC/TR8

### **Typical Electro-Optical Characteristics Curves**

EVERLIGHT

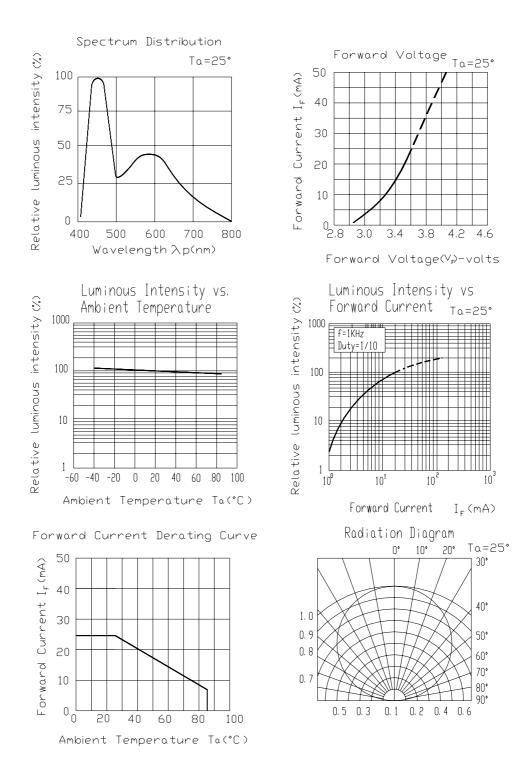

Everlight Electronics Co., Ltd. Device No. :

http://www.everlight.com Prepared date:20-Jan-05 Rev. 1.0Page: 5 of 10Prepared by: Forrest Chen

## EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

## 67-23B UWC/TR8


### Label explanation

- **CAT: Luminous Intensity Rank**
- **HUE: Chromaticity Coordinates Rank**

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

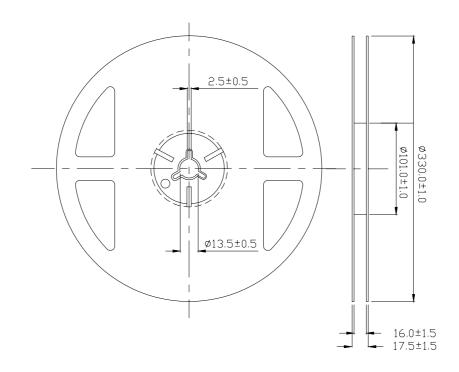

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm ,Unit = mm


Everlight Electronics Co., Ltd. Device No. :

http://www.everlight.com Prepared date:20-Jan-05

# **EVERLIGHT** EVERLIGHT ELECTRONICS CO.,LTD.


## 67-23B UWC/TR8

## **Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.**

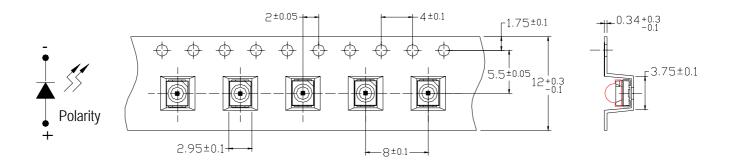

**Note:** Tolerances Unless Dimension  $\pm 0.1$ mm, Unit = mm

#### **Moisture Resistant Packaging**

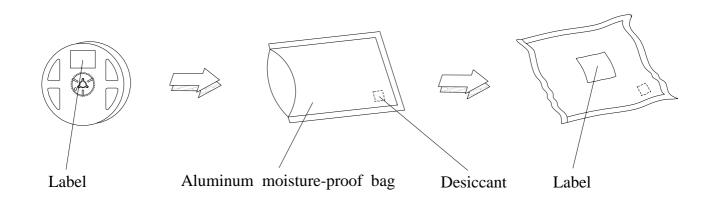

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

## 67-23B UWC/TR8

## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int$ 10 sec L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$\mathrm{IF}=20~mA \ / \ 25^\circ \mathrm{C}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1


## 67-23B UWC/TR8

## **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5℃ for 24 hours.
- 3. Soldering Condition
  - 3.1 Pb-free solder temperature profile

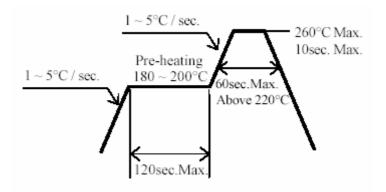

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4.Soldering Iron


Each terminal is to go to the tip of soldering iron temperature less than  $280^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

http://www.everlight.com Prepared date:20-Jan-05

## 67-23B UWC/TR8

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

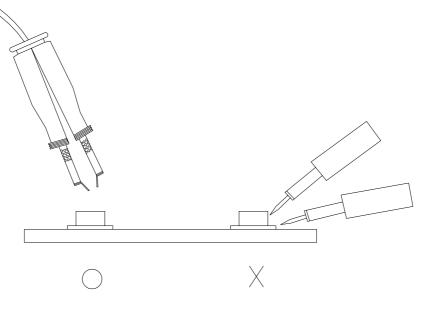

**EVERLIGHT ELECTRONICS CO., LTD.** Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

Everlight Electronics Co., Ltd. Device No. :

http://www.everlight.com Prepared date:20-Jan-05 Rev. 1.0 Page: 10 of 10 Prepared by: Forrest Chen