

Technical Data Sheet

1206 Package Chip LED with Inner Lens

11-21/BHC-YR1S1/2T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version.

Descriptions

- The 11-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

David Na	Chip	E:44 - 1 C-1	Resin Color	
Part No.	Material	Emitted Color		
11-21/BHC-YR1S1/2T	InGaN	Blue	Water Clear	



Everlight Electronics Co., Ltd.

Device No:DSE-0001750


http://www.everlight.com Prepared date: 16-Jun-2009 Rev. 1 Page: 1 of 10


Prepared by: Cheng Dejiang




11-21/BHC-YR1S1/2T


Package Outline Dimensions

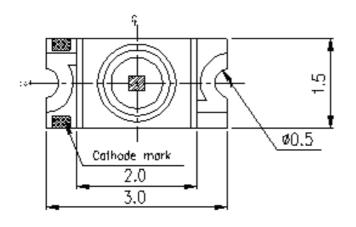






For reflow soldering (propose)



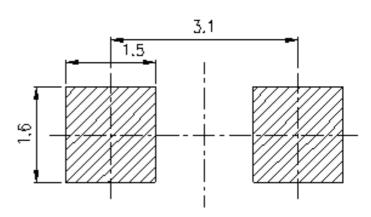

Notes: The tolerances unless mentioned are ± 0.1 , unit=mm.

Prepared by: Cheng Dejiang



11-21/BHC-YR1S1/2T

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	I_{F}	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	$ m I_{FP}$	100	mA	
Power Dissipation	Pd	95	mW	
Electrostatic Discharge(HBM)	ESD	150	V	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}$	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	112		225	mcd	
Viewing Angle	2 \theta 1/2		60		deg	
Peak Wavelength	λр		468		nm	
Dominant Wavelength	λd	470		475	nm	$I_F = 20 \text{mA}$
Spectrum Radiation Bandwidth	Δλ		25		nm	
Forward Voltage	V_{F}	2.70	3.30	3.70	V	
Reverse Current	I_R			50	μ A	$V_R = 5V$

Notes:

1.Tolerance of Luminous Intensity: ±11%2.Tolerance of Dominant Wavelength: ±1nm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 10 Device No:DSE-0001750 Prepared date: 16-Jun-2009 Prepared by: Cheng Dejiang



11-21/BHC-YR1S1/2T

Bin Range Of Dom. Wavelength

Bin	Min	Max	Unit	Condition
Y	470	475	nm	$I_F = 20mA$

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
R1	112	140		
R2	140	180	mcd	$I_F = 20mA$
S1	180	225		

Notes:

1.Tolerance of Luminous Intensity: $\pm 11\%$

2. Tolerance of Dominant Wavelength: ± 1 nm

Everlight Electronics Co., Ltd. Device No:DSE-0001750 http://www.everlight.com Prepared date: 16-Jun-2009 Rev. 1


Page: 4 of 10


Prepared by: Cheng Dejiang





11-21/BHC-YR1S1/2T


Typical Electro-Optical Characteristics Curves
















11-21/BHC-YR1S1/2T

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

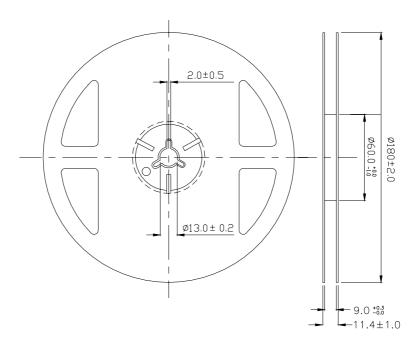


Note: The tolerances unless mentioned are ± 0.1 , Unit = mm.




11-21/BHC-YR1S1/2T

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

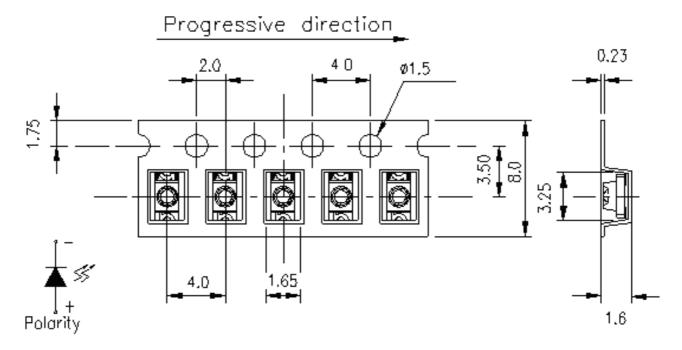

Note: The tolerances unless mentioned are ± 0.1 , Unit = mm.

Moisture Resistant Packaging

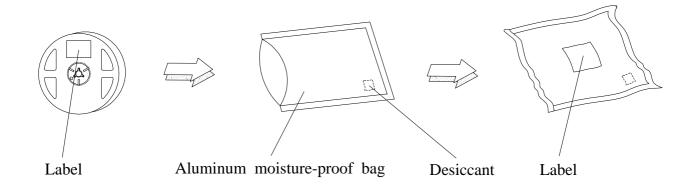

Everlight Electronics Co., Ltd. Device No:DSE-0001750

http://www.everlight.com

Rev. 1

Page: 7 of 10

Prepared date: 16-Jun-2009 Prepared by: Cheng Dejiang



11-21/BHC-YR1S1/2T

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Rev. 1

Prepared by: Cheng Dejiang

Page: 8 of 10




11-21/BHC-YR1S1/2T

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: $60\pm5^{\circ}$ C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

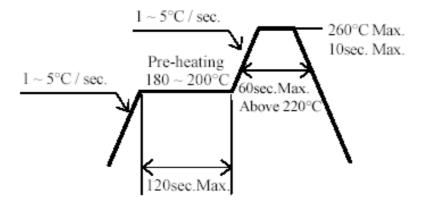

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 9 of 10

Device No:DSE-0001750 Prepared date: 16-Jun-2009 Prepared by: Cheng Dejiang




11-21/BHC-YR1S1/2T

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

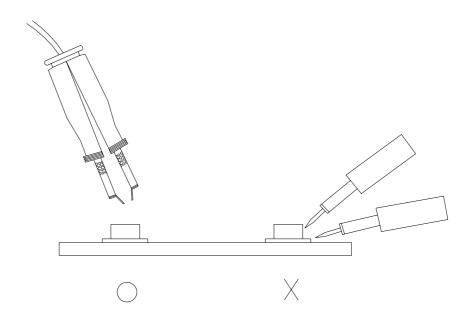

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com