# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

# **Technical Data Sheet**

# 0603 Package Chip LED (0.4mm Height)

#### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version

### Descriptions

- The 19-217 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

### **Device Selection Guide**

	Chip		Lens Color	
Part No.	Material	Emitted Color		
19-217/S2C-AM2N2VY/3T	AlGaInP	Brilliant Orange	Water Clear	




19-217/S2C-AM2N2VY/3T



# **Package Outline Dimensions**

## 19-217/S2C-AM2N2VY/3T

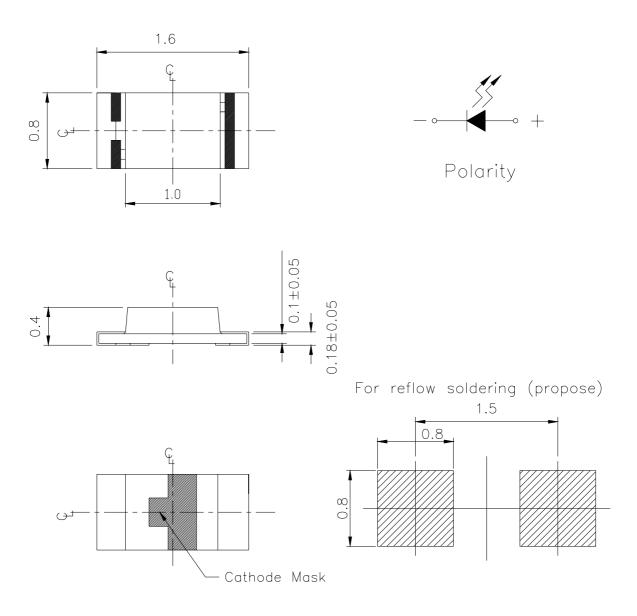

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm ,Unit = mm

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

#### 19-217/S2C-AM2N2VY/3T

Absolute Maximum Rati	ngs (Ta=25°C)	)	_	
Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	$I_{\rm F}$	25	mA	
Operating Temperature	Topr	-40 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +90	°C	
Electrostatic Discharge(HBM)	ESD	2000	V	
Power Dissipation	Pd	60	mW	
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	60	mA	
Soldering Temperature	Tsol	Reflow Soldering : 260 $^{\circ}$ C for 10 sec. Hand Soldering : 350 $^{\circ}$ C for 3 sec.		

# Electro-Optical Characteristics (Ta=25°C)

1						
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	$I_v$	22.5		45.0	mcd	
Viewing Angle	$2 \theta 1/2$		120		deg	
Peak Wavelength	λp		611		nm	
Dominant Wavelength	λd	600.5		612.5	nm	I <sub>F</sub> =5mA
Spectrum Radiation Bandwidth	$ riangle \lambda$		17		nm	
Forward Voltage	$V_{\mathrm{F}}$	1.70		2.20	V	
Reverse Current	I <sub>R</sub>			10	$\mu A$	V <sub>R</sub> =5V

#### Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

**3.**Tolerance of Forward Voltage ±0.05V

EVERLIGHT ELECTRONICS CO., LTD.

# 19-217/S2C-AM2N2VY/3T

#### **Bin Range Of Dom. Wavelength**

**ÆRLIGHT** 

Group	Bin	Min	Max	Unit	Condition	
Α	D8	600.5	603.5			
	D9	603.5	606.5	nm	I <sub>F</sub> =5mA	
	D10	606.5	609.5			
	D11	609.5	612.5			

#### **Bin Range Of Luminous Intensity**

U				
Bin	Min	Max	Unit	Condition
M2	22.5	28.5		
N1	28.5	36.0	mcd	I <sub>F</sub> =5mA
N2	36.0	45.0		

#### **Bin Rang Of Forward Voltage**

Group	Bin	Min	Max	Unit	Condition
	19	1.70	1.80		
	20	1.80	1.90		
v	21	1.90	2.00	V	I <sub>F</sub> =5mA
	22	2.00	2.10		
	23	2.10	2.20		

#### Notes:


1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.05V

EVERLIGHT ELECTRONICS CO., LTD.

# 19-217/S2C-AM2N2VY/3T

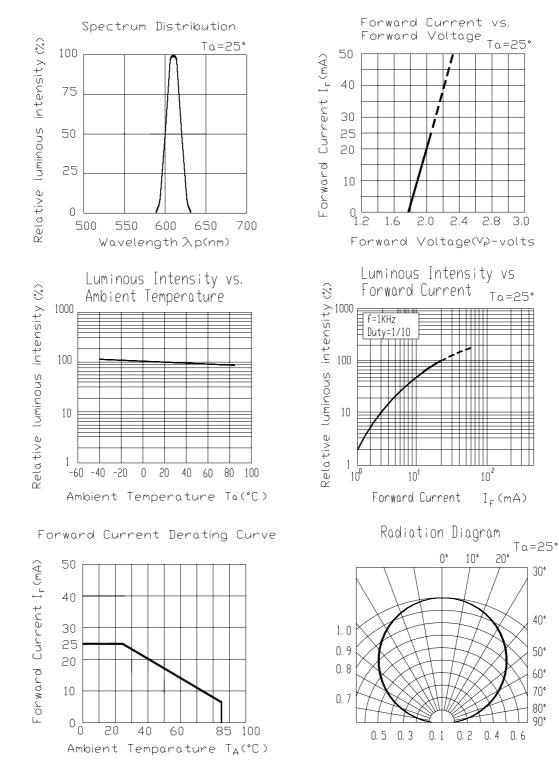

# **Typical Electro-Optical Characteristics Curves**

ÆRLIGHT


Everlight Electronics Co., Ltd. Device No:SZDSE-197-S03 http://www.everlight.com Prepared date: 17-Mar-2006 Rev. 1 Page: 5 of 10 Prepared by: Wu xiaowei

#### Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



#### **Reel Dimensions**

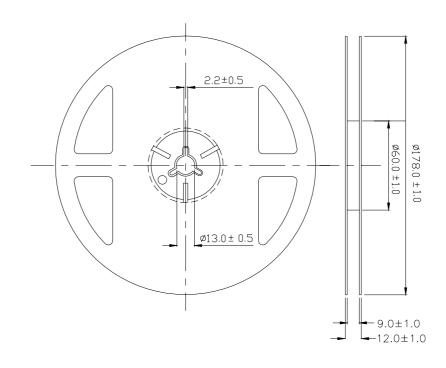


Everlight Electronics Co., Ltd. Device No:SZDSE-197-S03 http://www.everlight.com Prepared date: 17-Mar-2006 Rev. 1 Page: 6 of 10 Prepared by: Wu xiaowei

# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

#### 19-217/S2C-AM2N2VY/3T


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### **Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel**

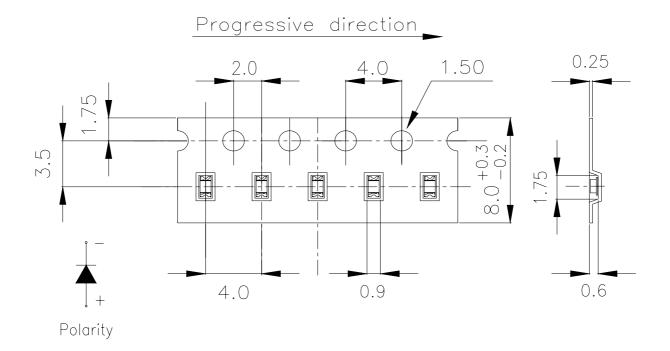

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### **Moisture Resistant Packaging**

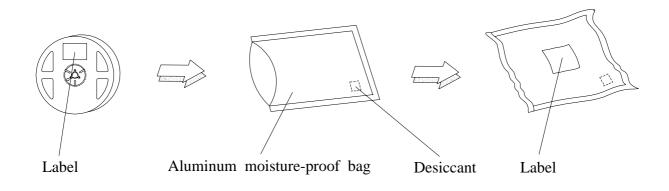

http://www.everlight.com Prepared date: 17-Mar-2006 Rev. 1 Page: 7 of 10 Prepared by: Wu xiaowei

# **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90% LTPD : 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C ±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°C	1000 Hrs.	22 PCS.	0/1
б	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90% RH or less.
- 2.3 After opening the package : The LEDs should be kept at 30°C or less and 60%RH or less(Floor life). However, it's recommended that the LEDs should be used within 168 hours (7 days) after opening the package. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

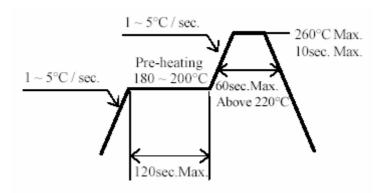


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

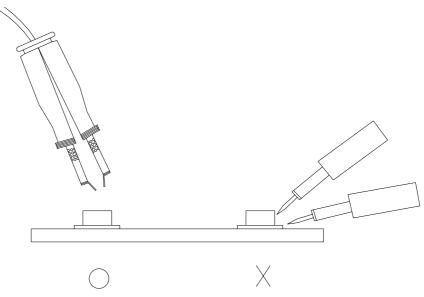

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

Everlight Electronics Co., Ltd. Device No:SZDSE-197-S03 http://www.everlight.com Prepared date: 17-Mar-2006 Rev. 1 Page: 10 of 10 Prepared by: Wu xiaowei