# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

## **Technical Data Sheet**

## White Chip LED With Right Angle Lens

#### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

## Descriptions


- The 27-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

#### **Device Selection Guide**


Part No.	C	Lens Color	
r alt INO.	Material	<b>Emitted Color</b>	Lens Color
27-21/T1D-ANPHY/3C	InGaN	White	Yellow Diffused



27-21/T1D-ANPHY/3C



## **Package Outline Dimensions**

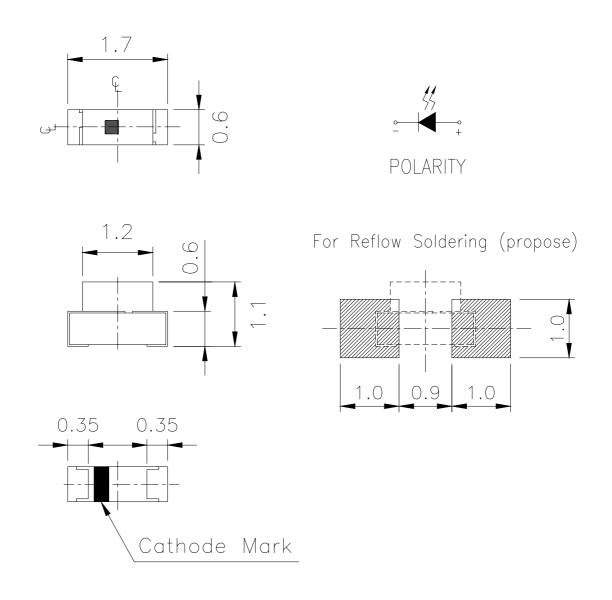

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm.

http://www.everlight.com Prepared date: 15-July-2005 27-21/T1D-ANPHY/3C

**VERLIGHT** EVERLIGHT ELECTRONICS CO., LTD.

# 27-21/T1D-ANPHY/3C

#### Absolute Maximum Ratings (Ta=25°C)

Thosofute Muximum Kutings (14–26 C)					
Parameter	Symbol	Rating	Unit		
Reverse Voltage	VR	5	V		
Forward Current	IF	25	mA		
Operating Temperature	Topr	-40 ~ +85	°C		
Storage Temperature	Tstg	-40 ~ +90	°C		
Power Dissipation	Pd	110	mW		
Electrostatic Discharge(HBM)	ESD	150	V		
Peak Forward Current (Duty 1/10 @1KHz)	IF	100	mA		
Soldering Temperature	Tsol	Reflow Soldering : $260^{\circ}$ C for 10sec. Hand Soldering : $350^{\circ}$ C for 3 sec.			

#### Electro-Optical Characteristics (Ta=25°C)

-						
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	28.5	40.0	72.0	mcd	IF=5mA
Viewing Angle	2 0 1/2		140		deg	IF=5mA
Forward Voltage	VF	2.70		3.15	V	IF=5mA
Reverse Current	Ir			50	$\mu A$	V <sub>R</sub> =5V

#### **Bin Range Of Luminous Intensity & Forward Voltage**

Symbol	Bin Code	Min.	Max.	Unit	Condition
Iv	N	28.5	45.0	1	IF=5mA
	Р	45.0	72.0	mcd	
VF	15	2.70	2.85		IF=5mA
	16	2.85	3.00	V	
	17	3.00	3.15		

Notes:

# 1.Tolerance of Luminous Intensity ±10%2.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. Device No. : SZDSE-271-T01 http://www.everlight.com Prepared date: 15-July-2005 EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

## 27-21/T1D-ANPHY/3C

	J = = = = = = = = = = = = = = = = = = =		IF= 5mA
Groups	Bin Code	CIE_x	CIE_y
		0.274	0.226
	1	0.274	0.258
	1 -	0.294	0.286
		0.294	0.254
		0.274	0.258
	2	0.274	0.291
	2	0.294	0.319
		0.294	0.286
		0.294	0.254
	3	0.294	0.286
		0.314	0.315
А		0.314	0.282
A		0.294	0.286
	4	0.294	0.319
		0.314	0.347
		0.314	0.315
	5	0.314	0.282
		0.314	0.315
		0.334	0.343
		0.334	0.311
	6	0.314	0.315
		0.314	0.347
		0.334	0.376
		0.334	0.343

## **Chromaticity Coordinates Specifications for Bin Grading**

Notes:

1.The C.I.E. 1931 chromaticity diagram ( Tolerance  $\pm 0.01$  ).


2. The products are sensitive to static electricity and care must be fully taken when handling products.

EVERLIGHT ELECTRONICS CO., LTD.

## 27-21/T1D-ANPHY/3C

#### **Typical Electro-Optical Characteristics Curves**

**ÆRLIGHT** 

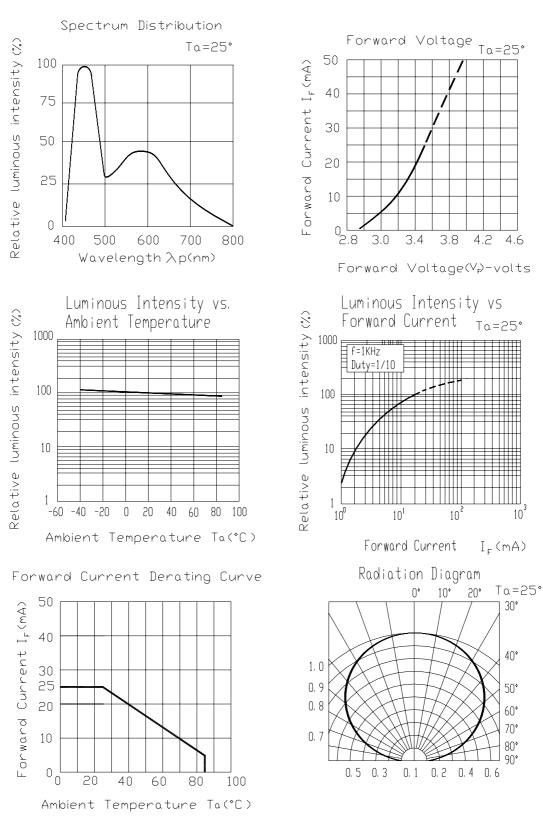


Everlight Electronics Co., Ltd. Device No. : SZDSE-271-T01 http://www.everlight.com Prepared date: 15-July-2005




#### Label explanation

CAT: Luminous Intensity Rank HUE: Chromaticity Coordinates REF: Forward Voltage Rank

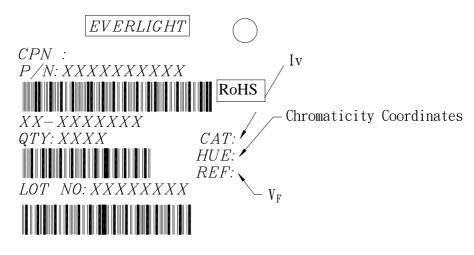

MADE IN TAIWAN

#### **Reel Dimensions**

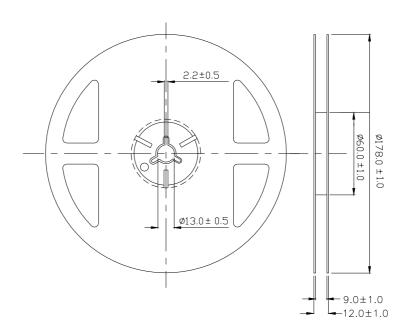


**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


## 27-21/T1D-ANPHY/3C

#### **Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel**

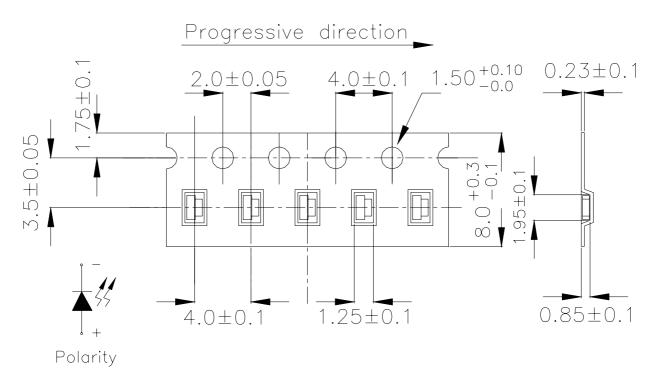

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

#### **Moisture Resistant Packaging**

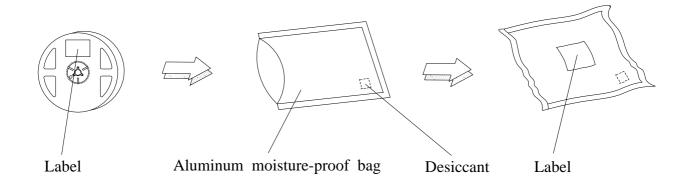



## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20  mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
  Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

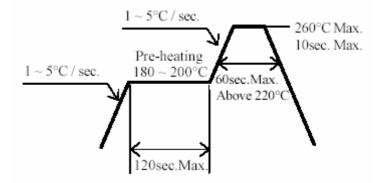


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

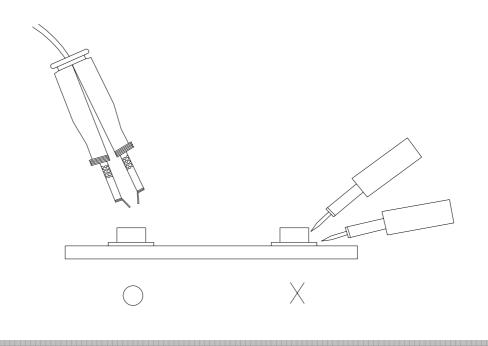

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*