

Part Number: AA5630UMW46-W2 Warm White



ATTENTION OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES

#### Features

- •Size (mm): 5.6 x 3.0 x 0.77
- •Suitable for all SMT assembly and solder process.
- •Available on tape and reel.
- •White SMD package, silicone resin.
- •Moisture sensitivity level : level 2a.
- •RoHS compliant.

#### Description

The source color devices are made with InGaN on Sapphire-substrate Light Emitting Diode.


Static electricity and surge damage the LEDS.

It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.

All devices, equipment and machinery must be electrically grounded.

#### Applications

- •LCD TV / Monitor Backlight.
- •Architectural lighting.
- •Decorative lighting.

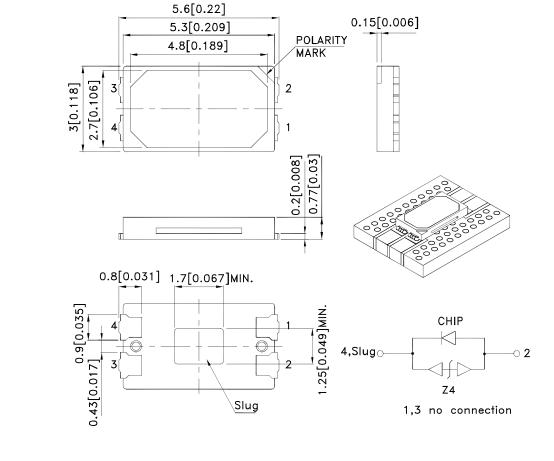

#### Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.

The specifications, characteristics and technical data described in the datasheet are subject to change without notice.
The device has a single mounting surface. The device must be mounted according to the specifications.




SPEC NO: DSAN0336 APPROVED: WYNEC REV NO: V.4B CHECKED: Allen Liu DATE: OCT/07/2013 DRAWN: Y.Liu PAGE: 1 OF 9 ERP: 1201008609

#### Package Dimensions


#### **Handling Precautions**


Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools.



2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.






3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.



- 4.1. The inner diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks.
- 4.2. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 4.3. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.



5. As silicone encapsulation is permeable to gases, some corrosive substances such as  $H_2S$  might corrode silver plating of leadframe. Special care should be taken if an LED with silicone encapsulation is to be used near such substances.

Selection Guide										
Part No.	Dice	CCT Range(K)			CRI		Φν (lm) [2] @ 120mA			Viewing Angle [1]
		Min.	Тур.	Max.	Тур.	Code.	Min.	Max.	Тур.	201/2
AA5630UMW46-W2	Warm White(InGaN)	2870	3000	3220	83	B8	35	42	40	120°
						В9	42	50		

Notes:

θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
Luminous intensity/ luminous Flux: +/-15%.
Luminous flux value is traceable to the CIE127-2007 compliant national standards.

#### Absolute Maximum Ratings at TA=25°C

Parameter	Symbol	Value	Unit
Power dissipation	PD	840	mW
Junction temperature[1]	TJ	110	°C
Reverse Voltage	VR	5	V
Operating Temperature	Тор	-40 To +85	°C
Storage Temperature	Tstg	-40 To +85	°C
DC Forward Current [1]	lf	240	mA
Peak Forward Current [2]	Iгм	350	mA
Electrostatic Discharge Threshold (HBM)		8000	V
Thermal resistance [1](Junction/ambient)	Rth j-a	90	°C/W
Thermal resistance (Junction/solder point)	Rth j-s	30	°C/W

Notes:

1.Results from mounting on metal core PCB


2.1/10 Duty Cycle, 0.1ms Pulse Width.

#### Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Value	Unit	
Forward Voltage IF = 120mA [Min.]		2.8		
Forward Voltage IF = 120mA [Typ.]	VF [1]	3.1	V	
Forward Voltage IF = 120mA [Max.]		3.4	1	
Allowable Reverse Current [Max.]	lr	85	mA	
$\label{eq:IF} \begin{array}{l} \mbox{Temperature coefficient of $x$} \\ \mbox{IF = 120mA, -10}^{\circ}\mbox{C} \leq T {\leq 85}^{\circ}\mbox{C}  \mbox{[Typ.]} \end{array}$	TCx	-0.14	10 <sup>-3</sup> /°C	
$\label{eq:IF} \begin{array}{l} \mbox{Temperature coefficient of y} \\ \mbox{IF = 120mA, -10}^{\circ}\mbox{C} \leq T {\leq 85}^{\circ}\mbox{C}  \mbox{[Typ.]} \end{array}$	ТСу	-0.16	10 <sup>-3</sup> /°C	
Temperature coefficient of VF IF = 120mA, - $10^{\circ}C \le T \le 85^{\circ}C$ [Typ.]	TCv	-2.7	mV/°C	

Note:


1.Forward Voltage: + / -0.1V.

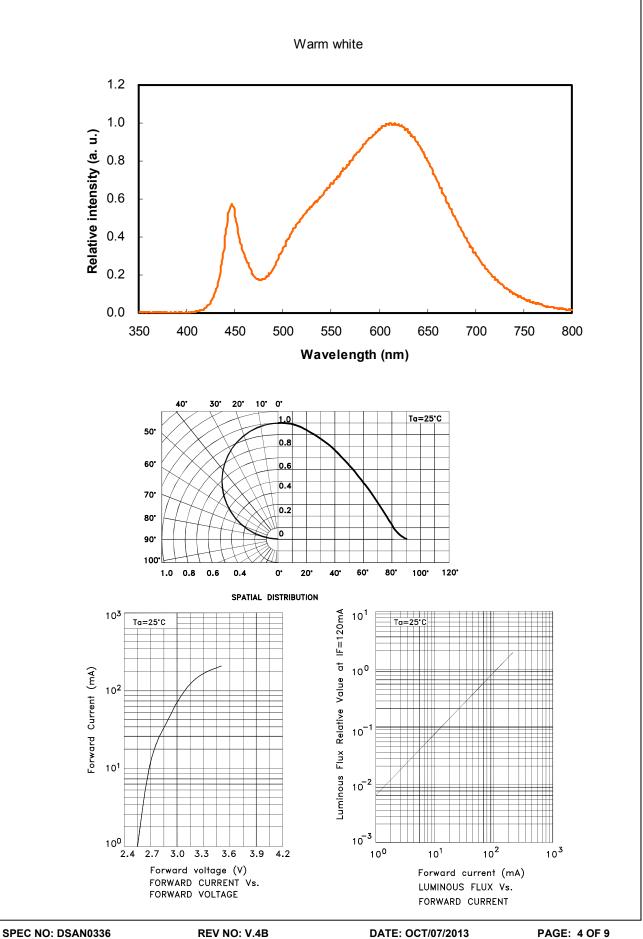


APPROVED: WYNEC

CHECKED: Allen Liu

DATE: OCT/07/2013 DRAWN: Y.Liu PAGE: 4 OF 9 ERP: 1201008609

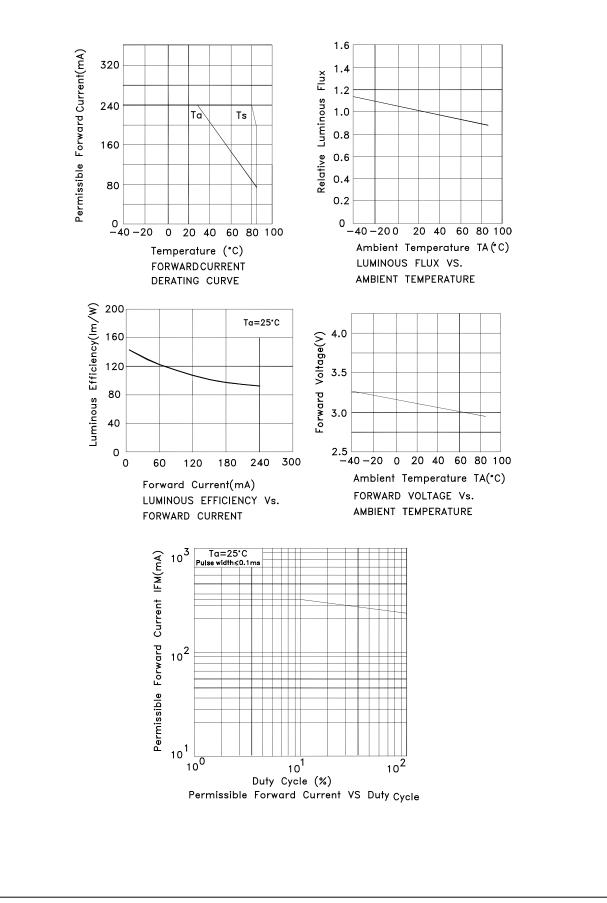


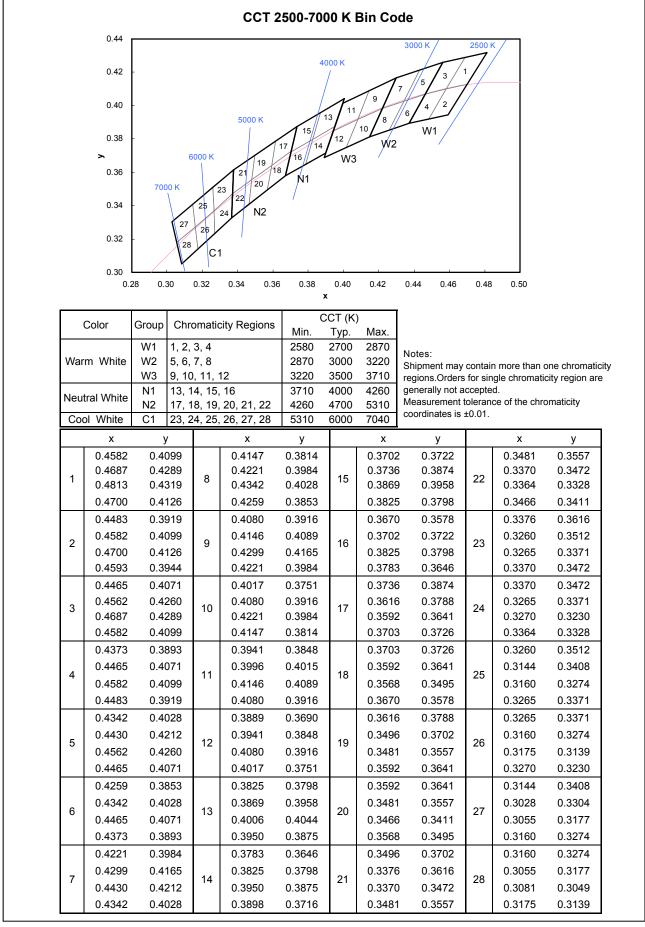



SPEC NO: DSAN0336 APPROVED: WYNEC REV NO: V.4B CHECKED: Allen Liu DATE: OCT/07/2013 DRAWN: Y.Liu PAGE: 6 OF 9 ERP: 1201008609

#### AA5630UMW46-W2

Reflow soldering is recommended and the soldering profile is shown below. Other soldering methods are not recommended as they might cause damage to the product.

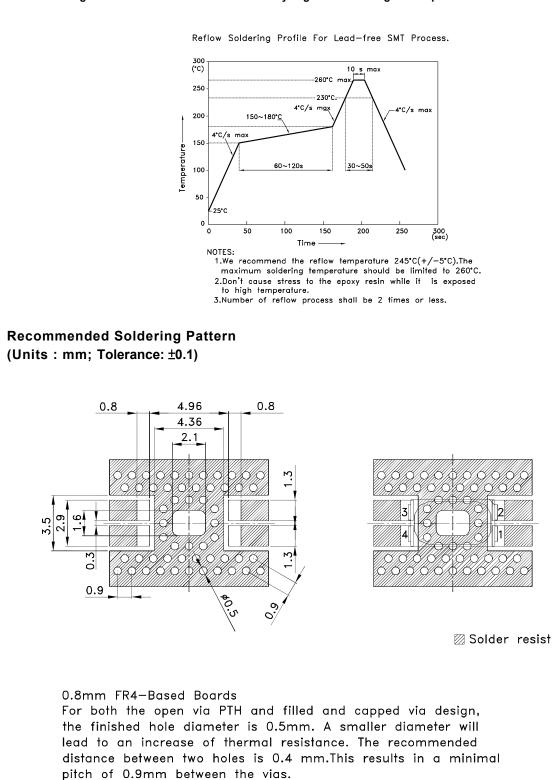

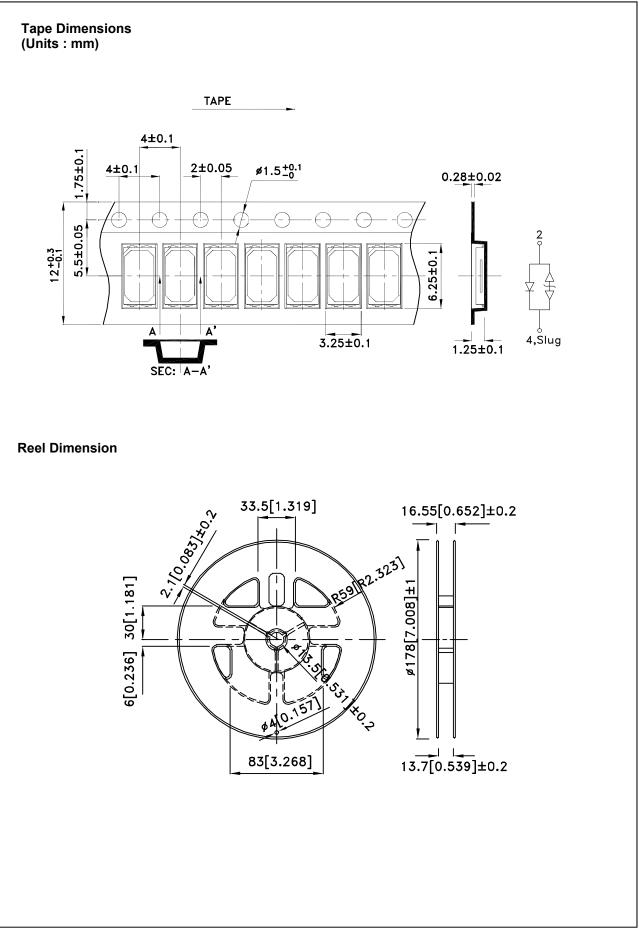

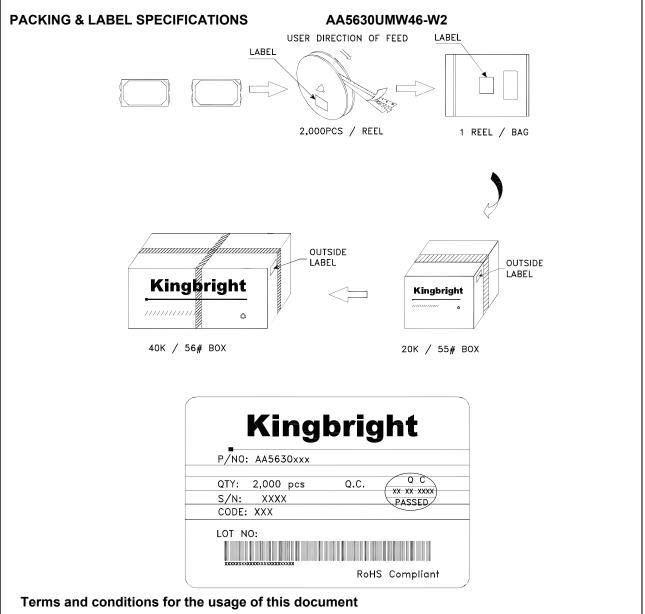

- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3.When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.
- 6.All design applications should refer to Kingbright application notes available at <a href="http://www.KingbrightUSA.com/ApplicationNotes">http://www.KingbrightUSA.com/ApplicationNotes</a>