

Technical Data Sheet

Side View LEDs (Height 1.4mm)

50-215/L2C-W2832W1X1E/2T

Features

- Side view white LED
- White SMT package
- Lead frame package with individual 2 pins
- Wide viewing angle
- Soldering methods: IR reflow soldering
- Pb-free
- The product itself will remain within RoHS compliant version.



Descriptions

- Due to the package design, 50-215 has wide viewing angle, low power consumption and white LEDs are devices that are materialized by combing blue chips and special phosphor. This feature makes the LED ideal for light guide application.

Applications

- LCD Back Light
- Mobile Phones
- Indicators
- Illuminations
- Switch Lights

Device Selection Guide



Chip	Emitted Color	Resin Color
Material		
InGaN	Warm White	Water Clear

Technical Data Sheet





Side View LEDs (Height 1.4mm)

50-215/L2C-W2832W1X1E/2T

Package Outline Dimensions

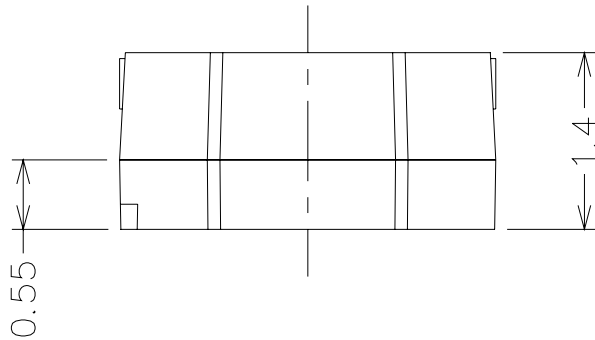

Polarity

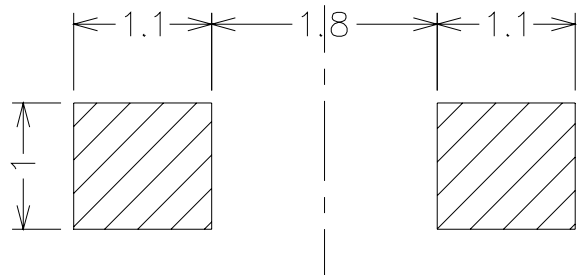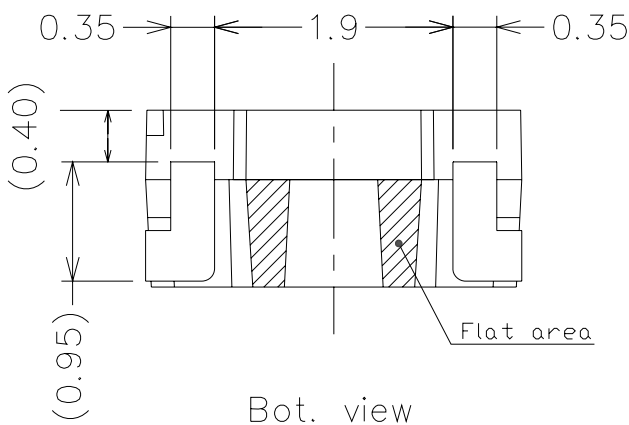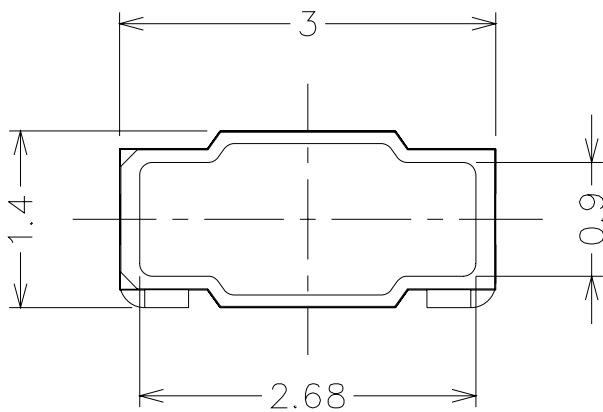

Note: The tolerances unless dimensions are $\pm 0.1\text{mm}$.

Technical Data Sheet

Side View LEDs (Height 1.4mm)

50-215/L2C-W2832W1X1E/2T

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _R	5	V
Forward Current	I _F	30	mA
Peak Forward Current (Duty 1/10 @1KHz)	I _{FP}	100	mA
Power Dissipation	P _d	110	mW
Electrostatic Discharge	ESD	1000	V
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +90	°C
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	

Note: The products are sensitive to static electricity and must be carefully taken when handling products.

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _v	1120	---	2250	mcd	I _F =20mA
Viewing Angle	2θ _{1/2}	---	120	---	deg	I _F =20mA
Forward Voltage	V _F	2.75	---	3.65	V	I _F =20mA
Reverse Current	I _R	---	---	50	μA	V _R =5V

Notes:

1. Tolerance of Luminous Intensity: ± 11%
2. Tolerance of Forward Voltage: ± 0.05V



LIGHTING FOREVER

Technical Data Sheet

Side View LEDs (Height 1.4mm)

50-215/L2C-W2832W1X1E/2T

Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
W1	1120	1420	mcd	$I_F=20\text{mA}$
W2	1420	1800		
X1	1800	2250		

Note: Tolerance of Luminous Intensity: $\pm 11\%$

Bin Range of Forward Voltage

Bin Code	Min.	Max.	Unit	Condition
5	2.75	3.05	V	$I_F=20\text{mA}$
6	3.05	3.35		
7	3.35	3.65		

Note: Tolerance of Forward Voltage: $\pm 0.05\text{V}$



Technical Data Sheet

Side View LEDs (Height 1.4mm)

50-215/L2C-W2832W1X1E/2T

Bin Range of Chromaticity Coordinates

I_F=20mA

CCT	Bin Code	CIE_x	CIE_y	CCT	Bin Code	CIE_x	CIE_y
3250K ~3050K	P4	0.4385	0.4404	3050K ~2850K	N4	0.4538	0.4460
		0.4538	0.4460			0.4705	0.4508
		0.4456	0.4287			0.4614	0.4333
		0.4312	0.4234			0.4456	0.4287
	P5	0.4312	0.4234		N5	0.4456	0.4287
		0.4456	0.4287			0.4614	0.4333
		0.4376	0.4116			0.4525	0.4162
		0.4240	0.4065			0.4376	0.4116
	P6	0.4240	0.4065		N6	0.4376	0.4116
		0.4376	0.4116			0.4525	0.4162
		0.4294	0.3943			0.4436	0.3991
		0.4165	0.3890			0.4294	0.3943
	P7	0.4165	0.3890		N7	0.4294	0.3943
		0.4294	0.3943			0.4436	0.3991
		0.4221	0.3790			0.4356	0.3837
		0.4100	0.3738			0.4221	0.3790


Note: Tolerance of Chromaticity Coordinates: ±0.01

Technical Data Sheet

Side View LEDs (Height 1.4mm)

50-215/L2C-W2832W1X1E/2T

The C.I.E. 1931 Chromaticity Diagram






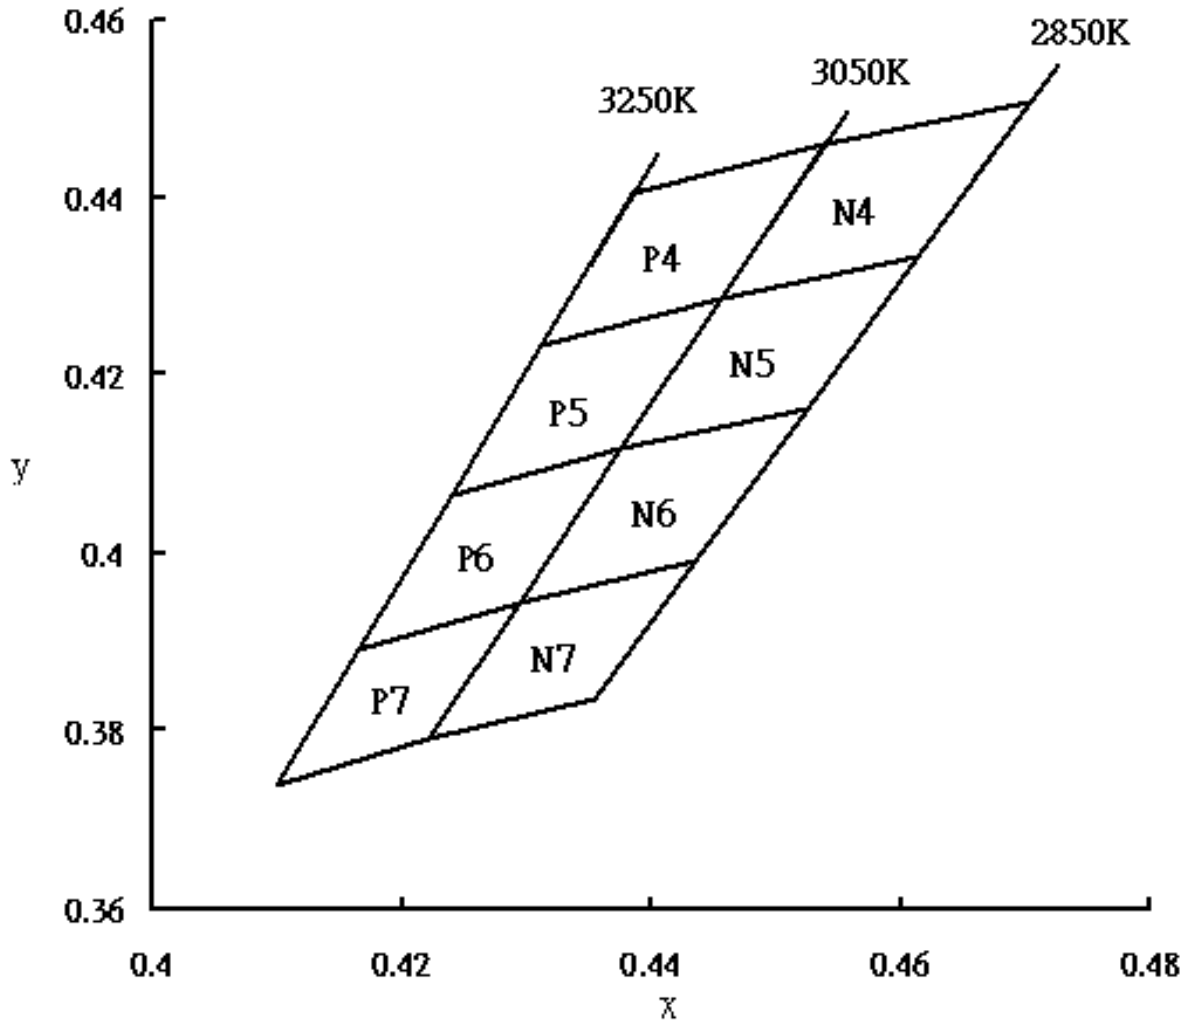


Technical Data Sheet

Side View LEDs (Height 1.4mm)

50-215/L2C-W2832W1X1E/2T

Typical Electro-Optical Characteristics Curves

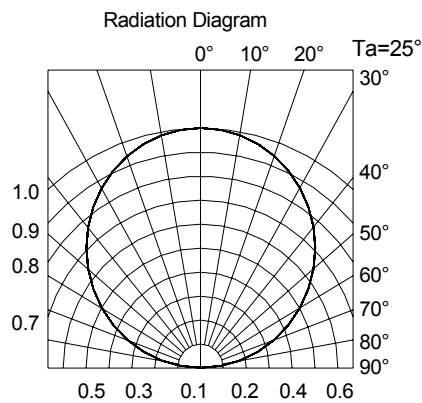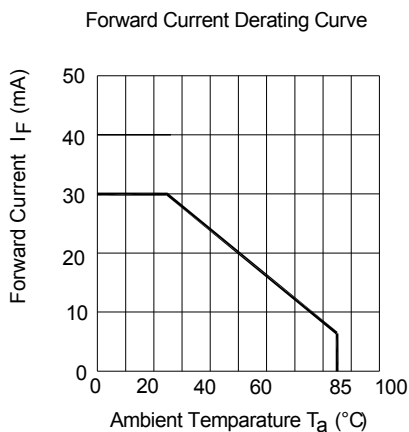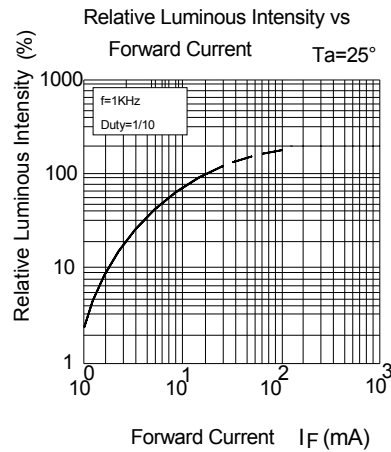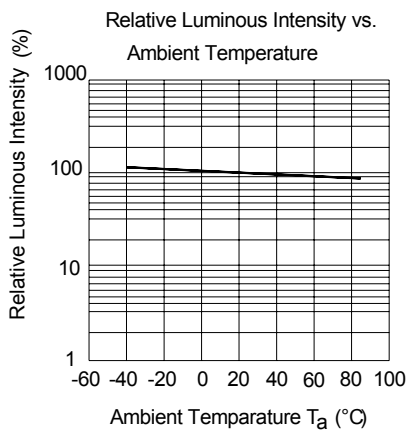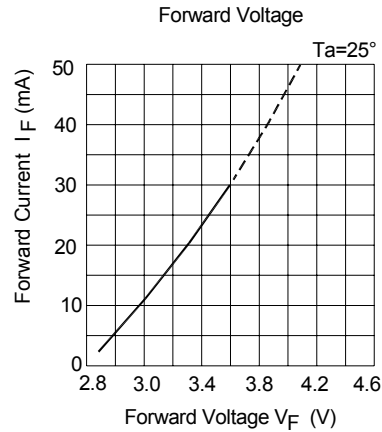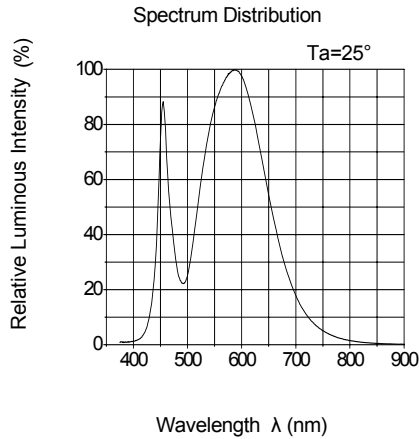



LIGHTING FOREVER

Technical Data Sheet

Side View LEDs (Height 1.4mm)


50-215/L2C-W2832W1X1E/2T

Label Explanation

- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates
- REF: Forward Voltage Rank



Reel Dimensions

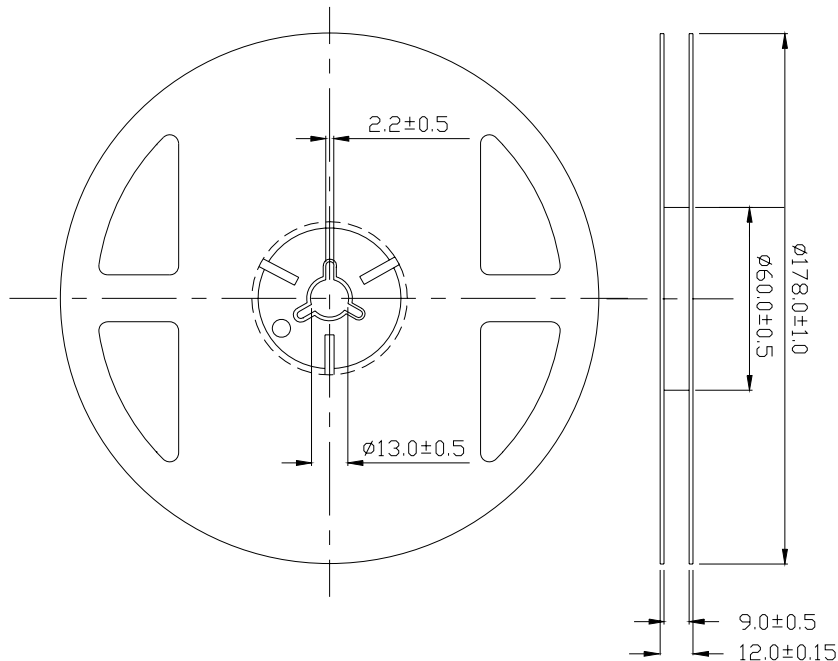


Note: The tolerances unless dimensions are ± 0.1mm.

Technical Data Sheet

Side View LEDs (Height 1.4mm)


50-215/L2C-W2832W1X1E/2T

Carrier Tape Dimensions: Loaded Quantity 2000 pcs. Per Reel

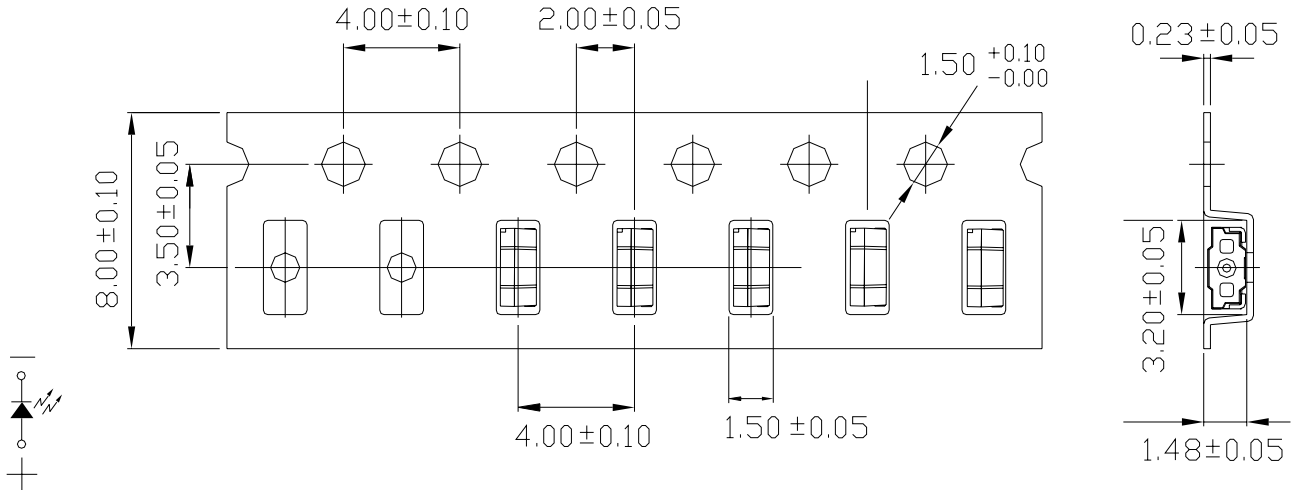

Note: The tolerances unless dimensions are $\pm 0.1\text{mm}$.

Moisture Resistant Packaging

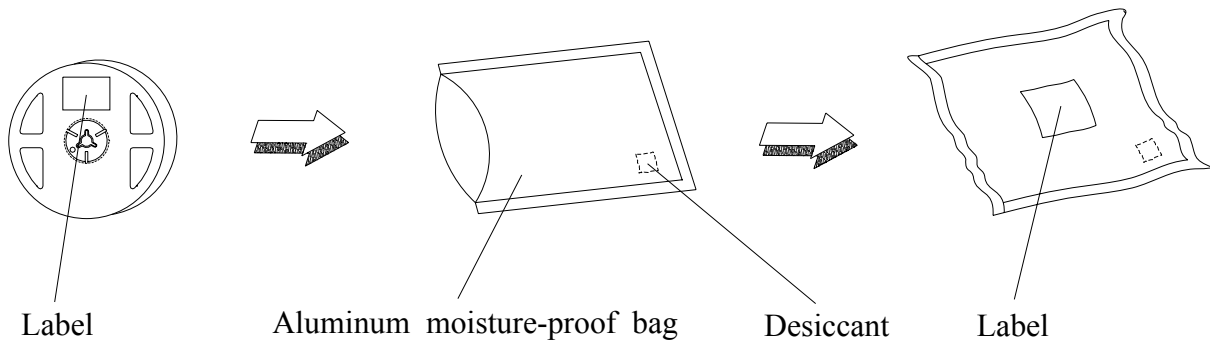

**Technical Data Sheet****Side View LEDs (Height 1.4mm)****50-215/L2C-W2832W1X1E/2T****Reliability Test Items and Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Qty'	Ac/Re
1	Reflow Soldering	Temp.: 260°C±5°C Min. 5 sec.	6 Min.	22 pcs.	0/1
2	Temperature Cycle	H: +100°C 15min. ↓ 5 min. L: -40°C 15min.	300 cycles	22 pcs.	0/1
3	Thermal Shock	H: +100°C 5min. ↓ 10 sec. L: -10°C 5min.	300 cycles	22 pcs.	0/1
4	High Temperature Storage	Temp.: 100°C±5°C	1000 hrs.	22 pcs.	0/1
5	Low Temperature Storage	Temp.: -40°C±5°C	1000 hrs.	22 pcs.	0/1
6	DC Operating Life	I _F = 20 mA / 25°C	1000 hrs.	22 pcs.	0/1
7	High Temperature / High Humidity	85°C±5°C / 85%RH	1000 hrs.	22 pcs.	0/1

Technical Data Sheet

Side View LEDs (Height 1.4mm)

50-215/L2C-W2832W1X1E/2T

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Don't open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.


2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

baking treatment: 60±5°C for 24 hours

3. Soldering Condition

3.1 Pb-free solder temperature profile:

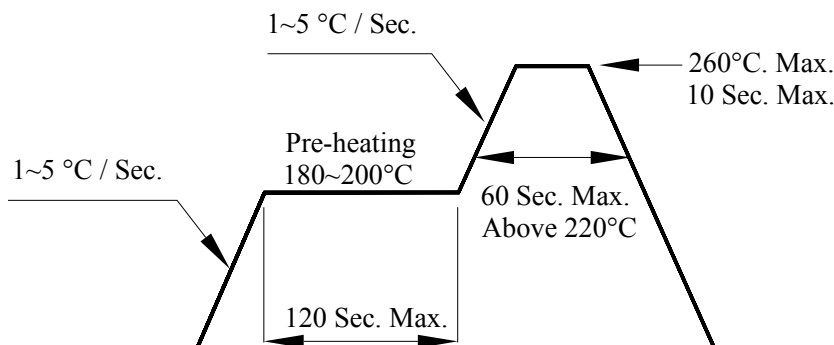

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

Technical Data Sheet**Side View LEDs (Height 1.4mm)****50-215/L2C-W2832W1X1E/2T****4. Soldering Iron**

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

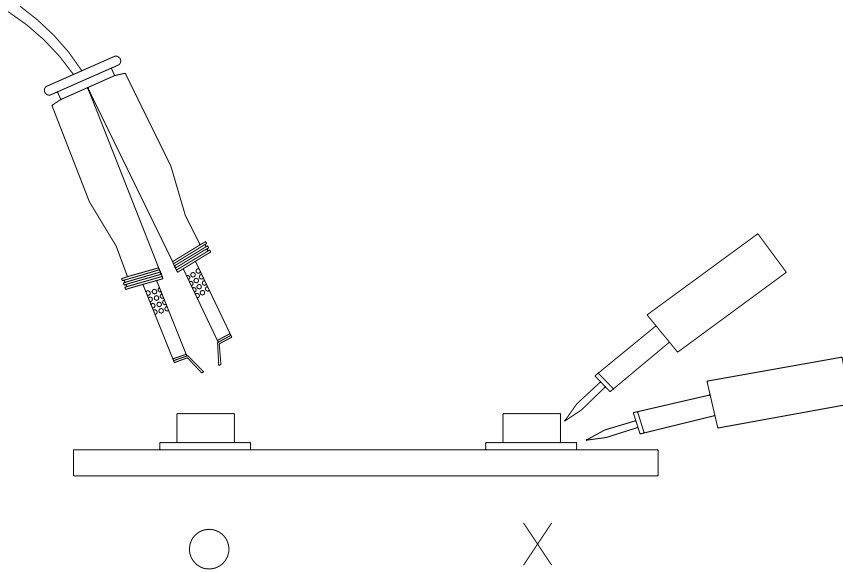

EVERLIGHT ELECTRONICS CO., LTD.
Office: No 25, Lane 76, Sec 3, Chung Yang Rd,
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936
Fax: 886-2267-6244, 2267-6189, 2267-6306
<http://www.everlight.com>