



Technical Data Sheet

Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM



Feature

- RoHS compliant.
- P-LCC-2 package.
- Wide viewing angle 120°.
- Colorless clear resin.
- Brightness: 2.8 to 7.1mcd at 2mA
- Inner reflector and white package.
- Precondition: Bases on JEDEC J-STD 020D Level 3.
- Qualification according to AEC-Q101 rev C.
- Useable in severe lead free processes with automotive reflow profile (IR reflow or wave soldering)

Applications

- Automotive backlighting or indicator: Dashboard, switch, audio and video equipments...etc.
- Backlight: LCD, switches, symbol, mobile phone and illuminated advertising.
- Display for indoor and outdoor application.
- Ideal for coupling into light guides.
- Substitution of traditional light.
- Optical indicator.

Device Selection Guide

Chip	Emitted Color	Resin Color
Material		
AlGaInP	Brilliant Yellow Green	Water Clear



Technical Data Sheet

Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _R	5	V
Forward Current	I _F	30	mA
Peak Forward Current (Duty 1/10@1KHz)	I _{FP}	80	mA
Power Dissipation	P _d	100	mW
Junction Temperature	T _j	115	°C
Operating Temperature	T _{opr}	-40 ~ +100	°C
Storage Temperature	T _{stg}	-40 ~ +110	°C
Thermal resistance	R _{th J-A}	500	K/W
	R _{th J-S}	400	K/W
ESD (Classification acc. AEC Q101)	ESD _{HBM}	2000	V
	ESD _{MM}	200	V
Soldering Temperature	T _{sol}	Reflow Soldering : 260 °C for 30 sec. Hand Soldering : 350 °C for 3 sec.	



Technical Data Sheet

Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I_v	2.8	---	7.1	mcd	$I_F=2\text{mA}$
Viewing Angle	$2\theta_{1/2}$	-----	120	-----	deg	$I_F=2\text{mA}$
Peak Wavelength	λ_p	-----	575	-----	nm	$I_F=2\text{mA}$
Dominant Wavelength	λ_d	567.5	-----	575.5	nm	$I_F=2\text{mA}$
Spectrum Radiation Bandwidth	$\Delta\lambda$	-----	20	-----	nm	$I_F=2\text{mA}$
Forward Voltage	V_F	1.75	-----	2.35	V	$I_F=2\text{mA}$
Reverse Current	I_R	-----	-----	10	μA	$V_R=5\text{V}$
Temperature coefficient of λ_p	TC_{λ_p}	-----	0.13	-----	nm/K	$I_F=2\text{mA}$
Temperature coefficient of λ_d	TC_{λ_d}	-----	0.12	-----	nm/K	$I_F=2\text{mA}$
Temperature coefficient of V_F	TC_V	-----	-2.5	-----	mV/K	$I_F=2\text{mA}$

Note:

1. Tolerance of Luminous Intensity: $\pm 11\%$
2. Tolerance of Dominant Wavelength: $\pm 1\text{nm}$
3. Tolerance of Forward Voltage: $\pm 0.1\text{V}$

**Technical Data Sheet****Top View LEDs****67-21-G6SC-B0H1J2B0A-2T8-AM****Bin Range of Luminous Intensity**

Bin Code	Min.	Max.	Unit	Condition
H1	2.8	3.55	mcd	$I_F = 2\text{mA}$
H2	3.55	4.5		
J1	4.5	5.6		
J2	5.6	7.1		

Notes:

Tolerance of Luminous Intensity: $\pm 11\%$ **Bin Range of Dominant Wavelength**

Group	Bin Code	Min.	Max.	Unit	Condition
B0	C15	567.5	569.5	nm	$I_F = 2\text{mA}$
	C16	569.5	571.5		
	C17	571.5	573.5		
	C18	573.5	575.5		

Note:

Tolerance of Dominant Wavelength: $\pm 1\text{nm}$


Technical Data Sheet

Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM


Typical Electro-Optical Characteristics Curves (Ta=25°C)

Typical Curve of Spectral Distribution

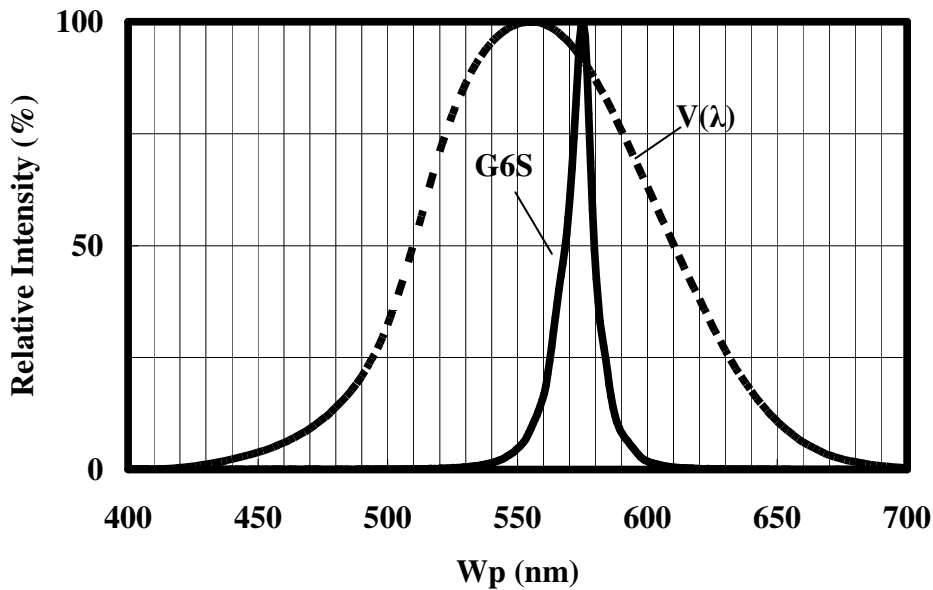

Note : $V(\lambda)$ =Standard eye response curve; $I_F = 2\text{mA}$

Diagram Characteristics of Radiation

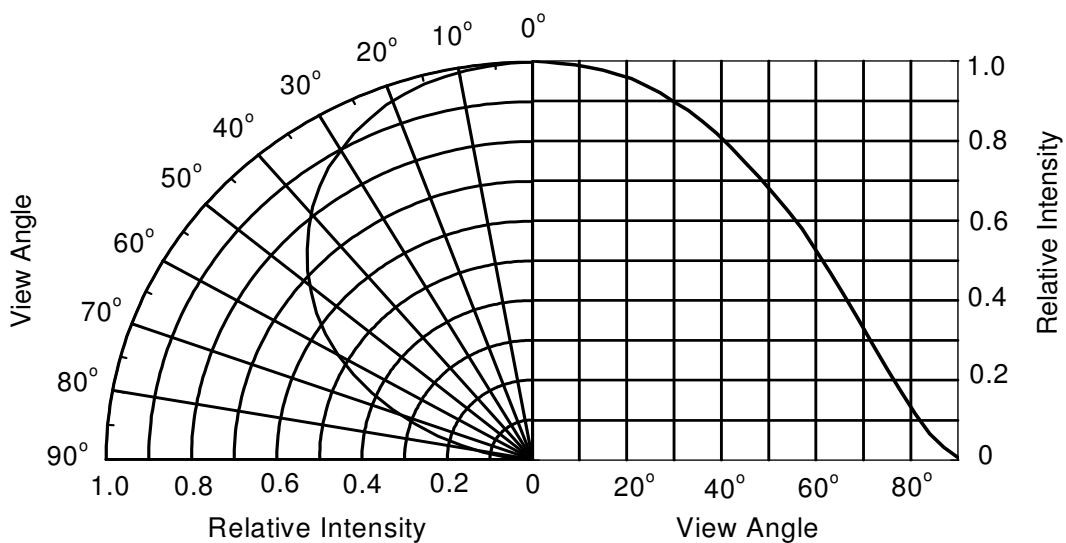




Technical Data Sheet


Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM

Forward Current vs. Forward Voltage (Ta=25°C)

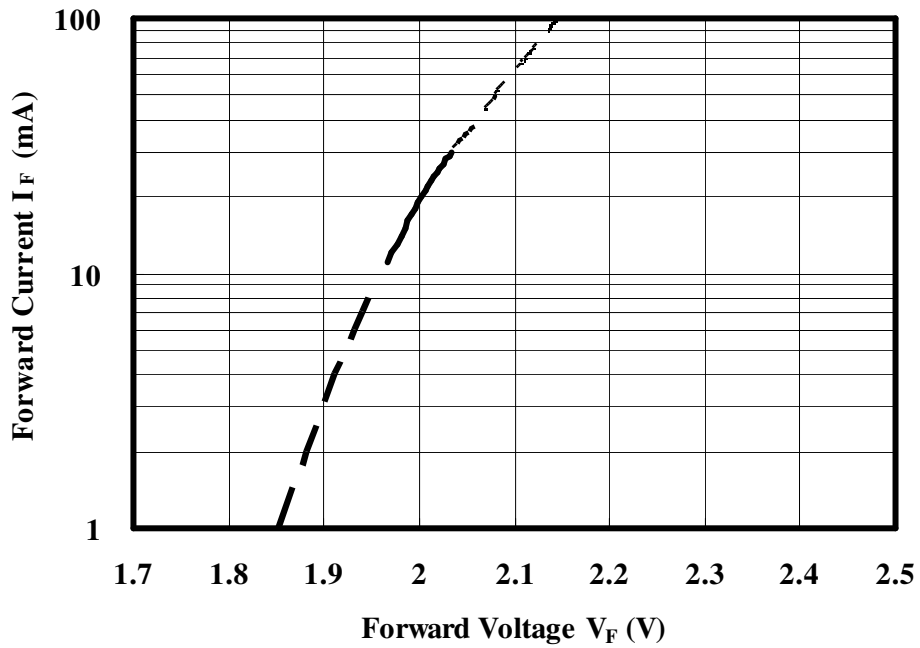

Relative Luminous Intensity vs. Forward Current (Ta=25°C)

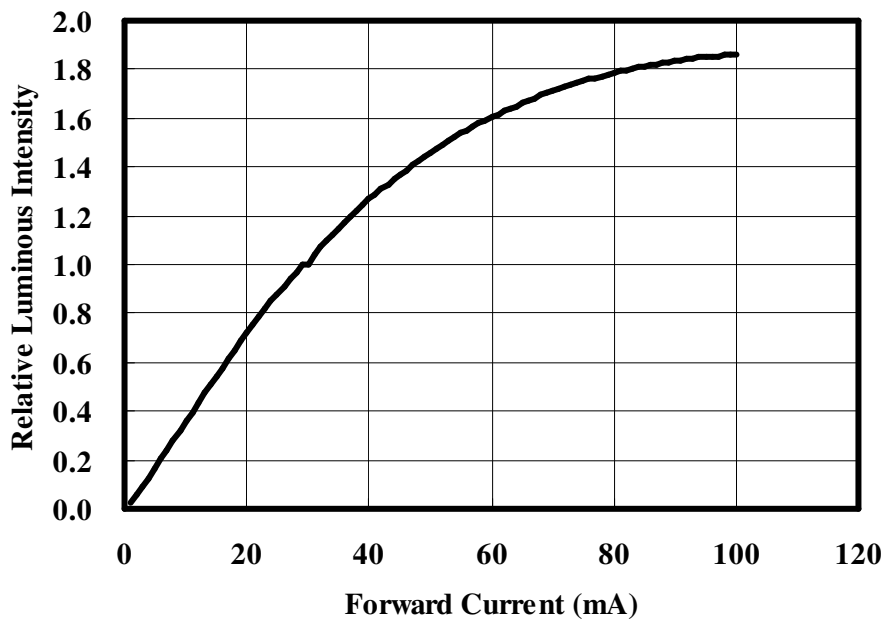


Technical Data Sheet


Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM

Forward Current vs. Ambient and Solder Temperature

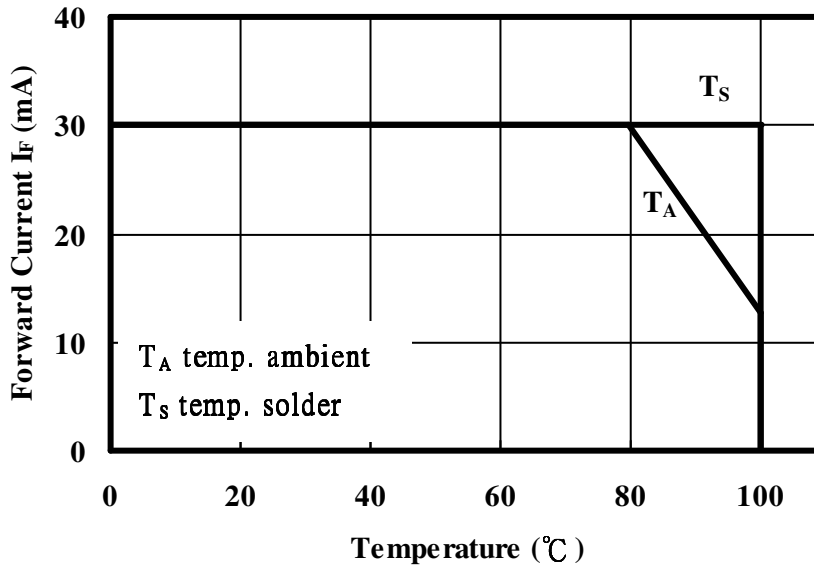

Relative Luminous Intensity vs. Junction Temperature

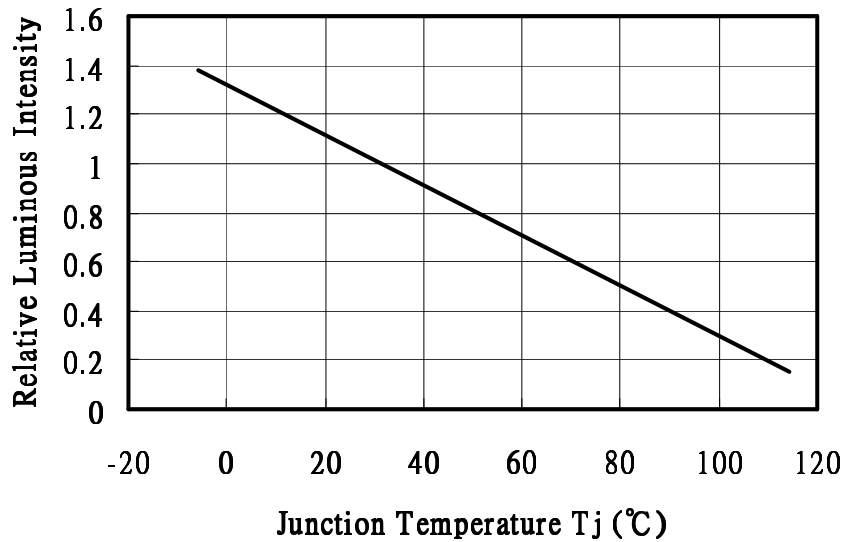

Note: $f(T_j) = I_v / I_v(25^\circ\text{C})$; $I_F = 2\text{mA}$




Technical Data Sheet

Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM

Relative Forward Voltage vs. Junction Temperature

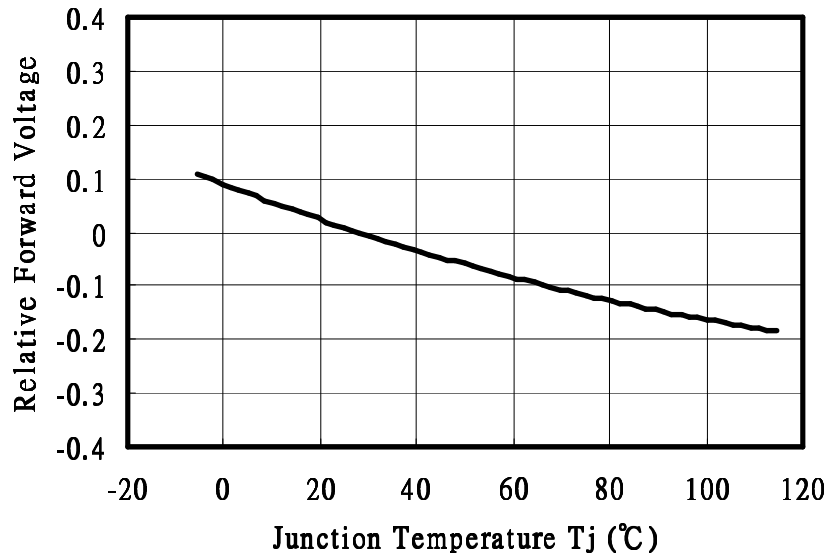


Note: $\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j)$; $I_F = 2\text{mA}$

Technical Data Sheet

Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM

Package Dimension

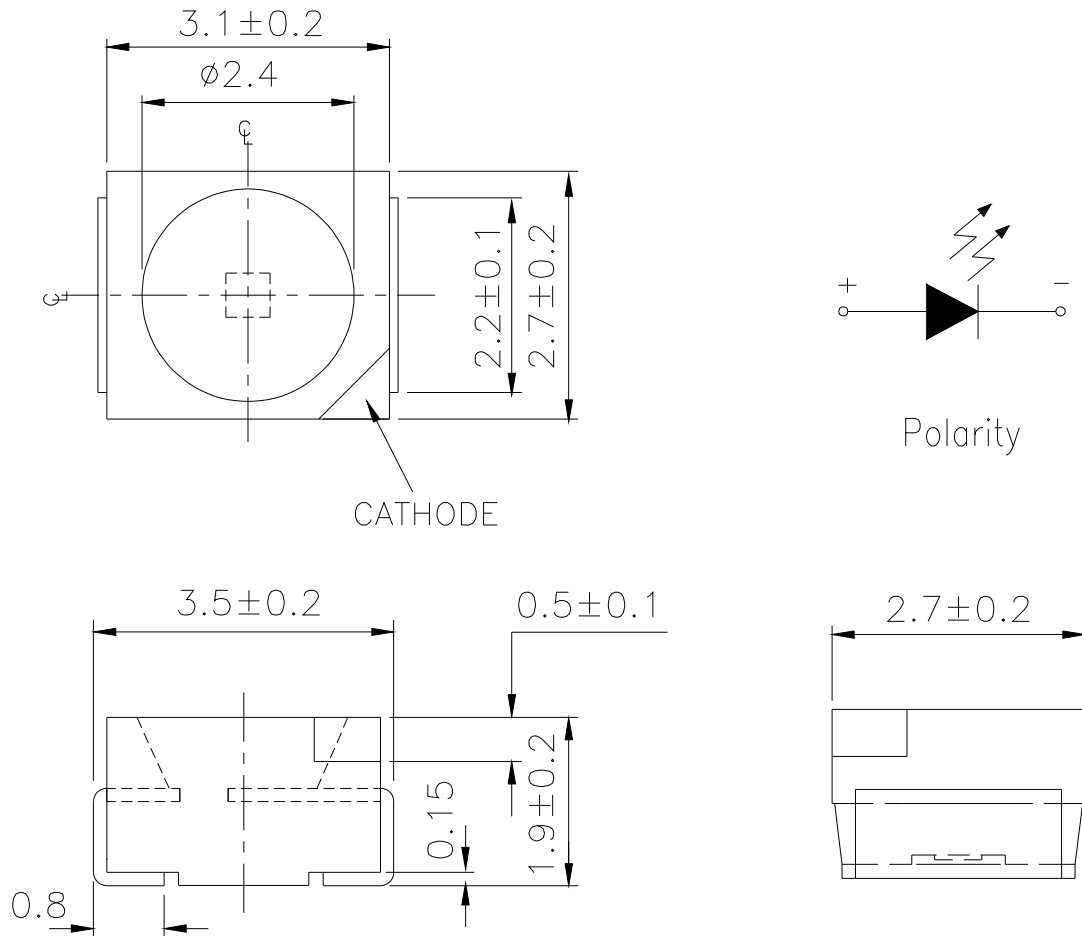

Note: Tolerances unless mentioned ± 0.1 mm. Unit = mm


Technical Data Sheet

Top View LEDs


67-21-G6SC-B0H1J2B0A-2T8-AM

Label Explanation

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

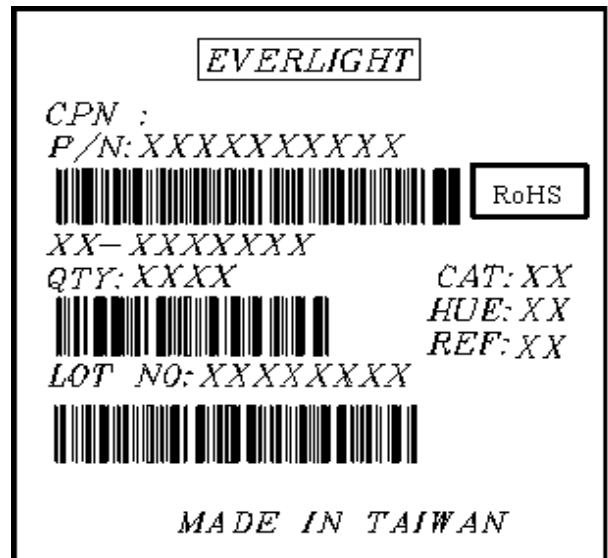

Reel Dimensions

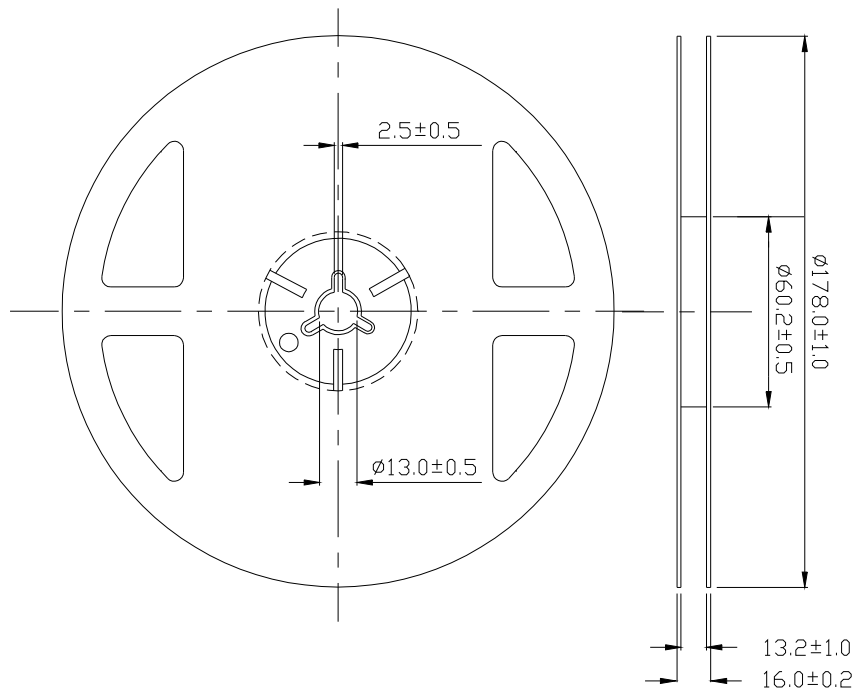



EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM

Note: Unit = mm




Technical Data Sheet

Top View LEDs


67-21-G6SC-B0H1J2B0A-2T8-AM

Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel

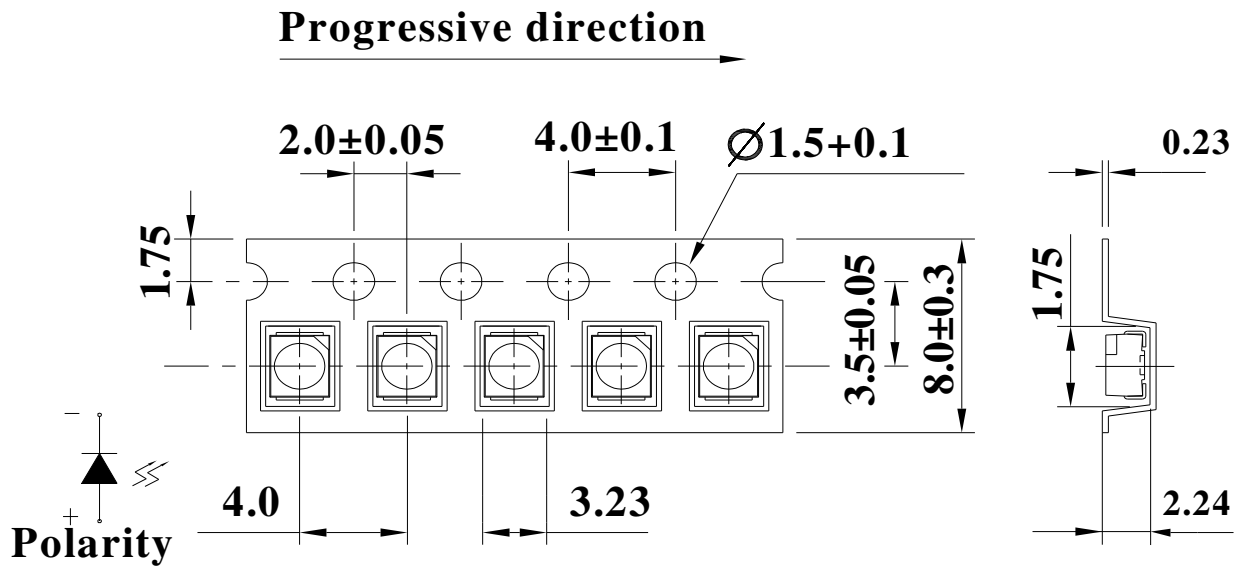

Note: Tolerances unless mentioned ± 0.1 mm. Unit = mm

Moisture Resistant Packaging Process and Materials

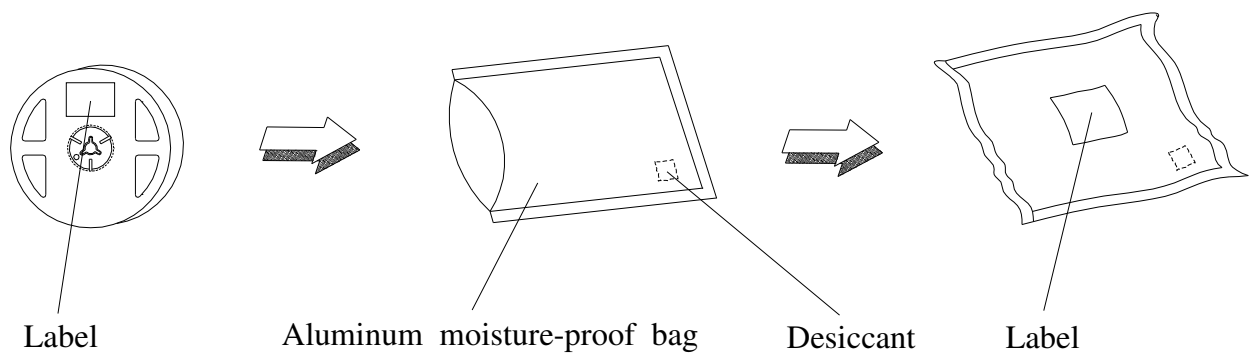

Technical Data Sheet


Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM

Precautions for Use

1. Soldering Condition

1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

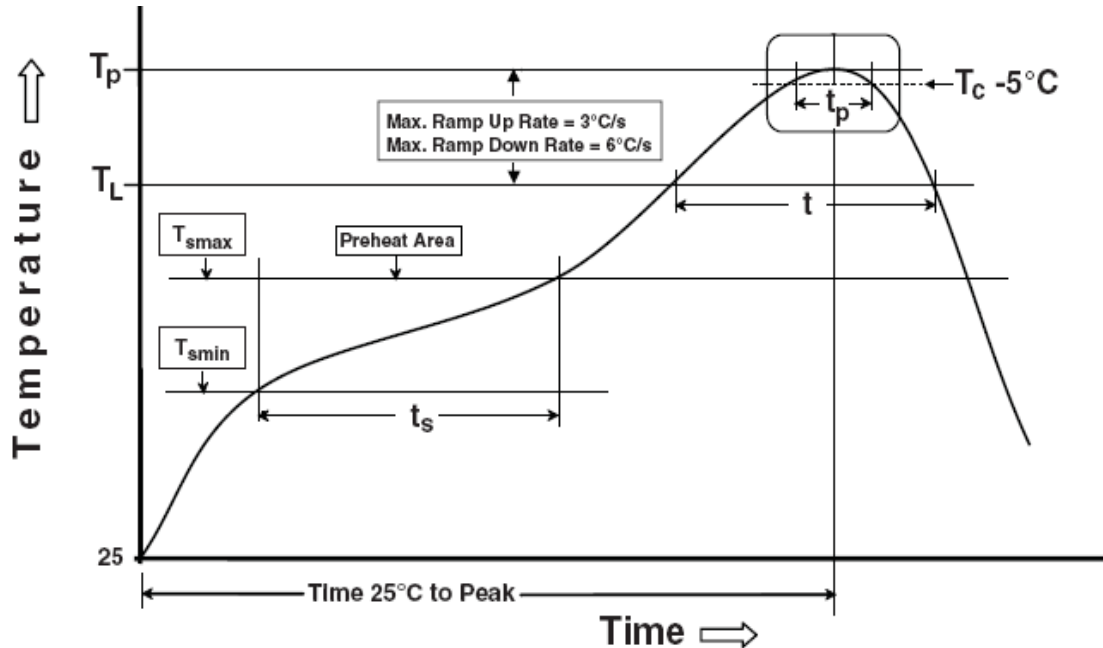

Note:

Preheat

Temperature min (T_{smin})

Reference: IPC/JEDEC J-STD-020D

150 °C

Temperature max (T_{smax})

200°C

Time (T_{smin} to T_{smax}) (t_s)

60-120 seconds

Average ramp-up rate (T_{smax} to T_p)

3 °C/second max.

Other

Liquidus Temperature (T_L)

217 °C

Time above Liquidus Temperature (t_L)

60-150 sec

Peak Temperature (T_p)

260°C

Time within 5 °C of Actual Peak Temperature: $T_p - 5^\circ\text{C}$

30 s

Ramp- Down Rate from Peak Temperature

6°C /second max.

Time 25°C to peak temperature

8 minutes max.

Reflow times

3 times

All parameters are maximum body case temperature values and cannot be considered as a soldering profile. The body temperature was measured by soldering a thermal couple to the



EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet


Top View LEDs

67-21-G6SC-B0H1J2B0A-2T8-AM

soldering point of LEDs.

Technical Data Sheet**Top View LEDs****67-21-G6SC-B0H1J2B0A-2T8-AM**

(B) Recommend soldering pad

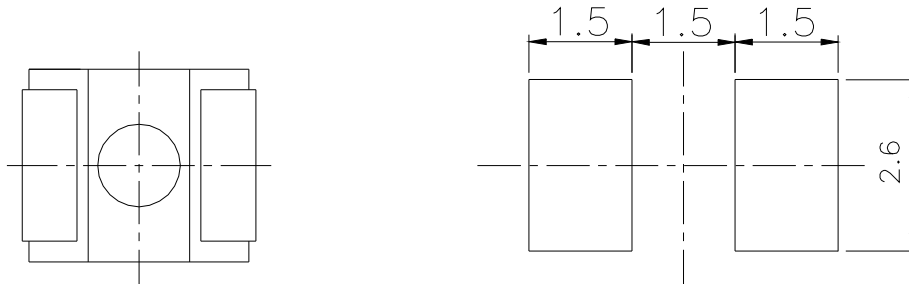

Note: Tolerances unless mentioned ± 0.1 mm. Unit = mm

2. Current limiting

A resistor should be used to limit current spikes that can be caused by voltage fluctuations. Otherwise damage could occur.

3. Storage

3.1 Moisture proof bag should only be opened immediately prior to usage.

3.2 Environment should be less than 30°C and 90% RH when moisture proof bag is opened.

3.3 After opening the package MSL Conditions stated on page 1 of this spec should not be exceeded.

3.4 If the moisture sensitivity card indicates higher than acceptable moisture, the component should be baked at min. 60°C $\pm 5^{\circ}\text{C}$ for 25 hours.

4. Iron Soldering

Hand soldering is not recommended for regular production. These guidelines are for rework only. Soldering iron tip should contact each terminal no more than 3 sec at 350°C , using soldering iron with nominal power less than 25W. Allow min. 2 sec. between soldering intervals.

5. Usage

Do not exceed the values given in this specification.

Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.