



MODEL NO: 67-21USRC/S530-A5/TR8

Device Number : DSE-671-107 REV. 1.0

**TOP LEDs**

ECN : \_\_\_\_\_ Page: 1/7

**Features :**

- P-LCC-2package.
- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Inter reflector.
- Low (2mA) current operation.
- Wide viewing angle.
- Computable with automatic placement equipment.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Available on tape and reel (8mm Tape).


**Descriptions :**

- The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector.
- This feature makes the SMT TOP LED ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

**Applications :**

- Automotive: backlight in dashboards and switches
- Telecommunication: indicator and backlight in telephone and fax.
- Indicator and backlight for audio and video equipment.
- Indicator and backlight in office and family equipment.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.

**Package Dimensions :**

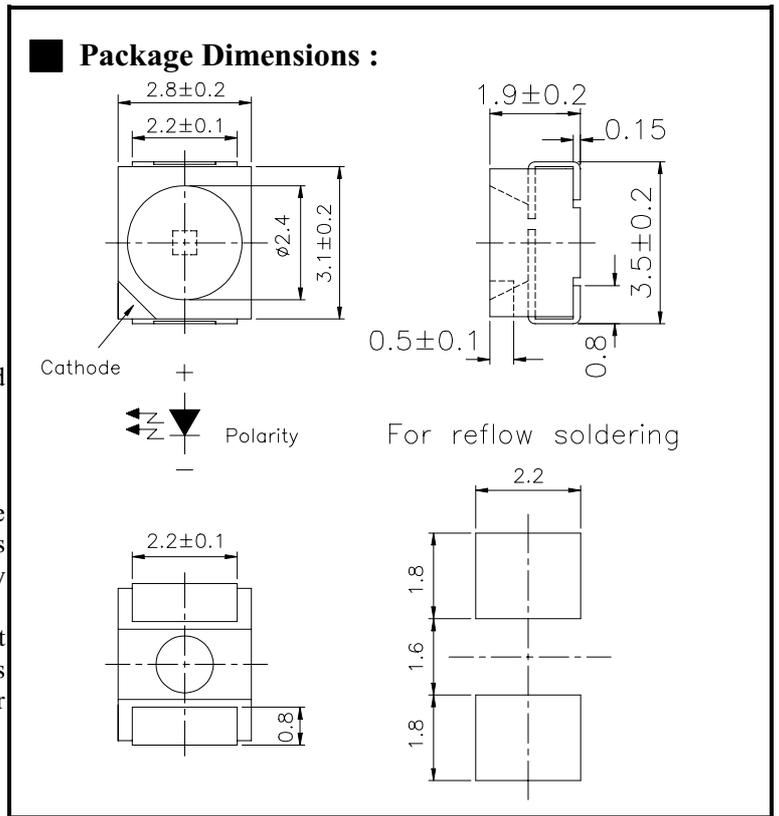

**Notes :**

Tolerances Unless Dimension  $\pm 0.1\text{mm}$   
 Angle  $\pm 0.5^\circ$   
 Unit = mm

Part NO.	Chip		Lens Color
	Material	Emitted Color	
67-21USRC/S530-A5/TR8	AlGaInP	Super Red	Water Clear

Office: NO. 25, Lane 76, Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL: 886-2-2267-2000, 2267-9936

FAX: 886-2-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com




MODEL NO: 67-21USRC/S530-A5/TR8

Device Number : DSE-671-107 REV. 1.0


**TOP LEDs**

ECN : ..... Page: 2/7

■ **Package Dimensions :**

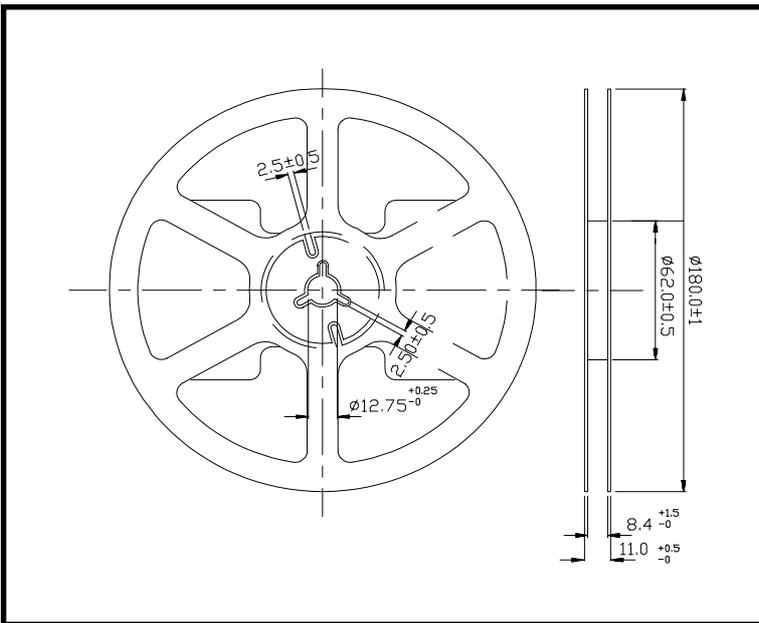

■ **Loaded quantity per reel 2000 PCS/reel :**

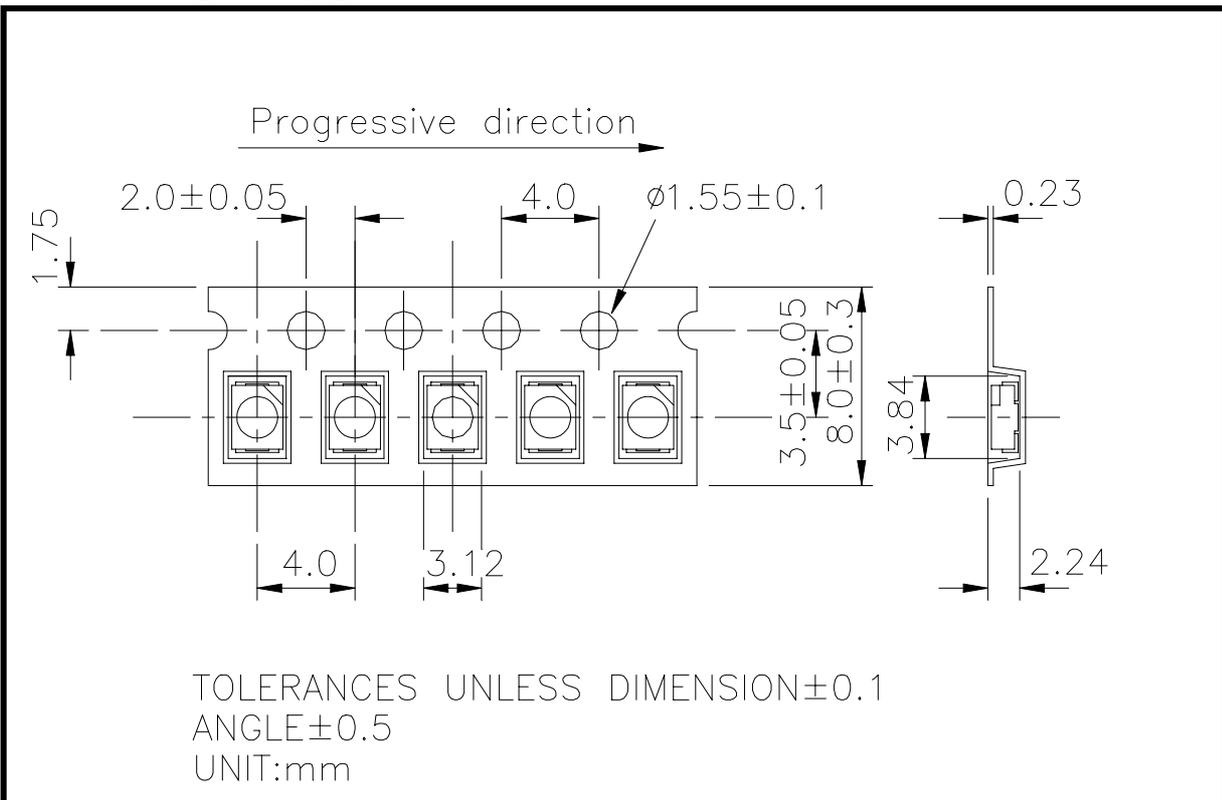



MODEL NO: 67-21USRC/S530-A5/TR8

Device Number : DSE-671-107 REV. 1.0

**TOP LEDs**

ECN : \_\_\_\_\_ Page: 3/7

■ **Absolute Maximum Ratings at Ta = 25°C :**

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	25	mA
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +90	°C
Soldering Temperature	Tsol	260(for 5 second)	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA

■ **Electronic Optical Characteristics :**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous intensity	Iv	-----	6	-----	mcd	If=2mA
		66	108	-----	mcd	If=20mA
Viewing Angle	2θ 1/2	-----	120	-----	deg	If=20mA
Peak Wavelength	λ p	-----	639	-----	nm	If=20mA
Dominant Wavelength	λ d	-----	631	-----	nm	If=20mA
Spectrum Radiation Bandwidth	Δ λ	-----	20	-----	nm	If=20mA
Forward Voltage	V <sub>F</sub>	-----	2.0	2.4	V	If=20mA
Reverse Current	I <sub>R</sub>	-----	-----	10	μ A	V <sub>R</sub> =5V



MODEL NO: 67-21USRC/S530-A5/TR8

Device Number : DSE-671-107 REV. 1.0

**TOP LEDs**

ECN : \_\_\_\_\_ Page: 4/7

■ **Reliability Test Item And Condition :**

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1

Products are evaluated according to the above standard reliability criteria.







MODEL NO: 67-21USRC/S530-A5/TR8

Device Number : DSE-671-107 REV. 1.0



**TOP LEDs**

ECN : \_\_\_\_\_ Page: 5/7

**Typical Electro-Optical Characteristic Curves :**

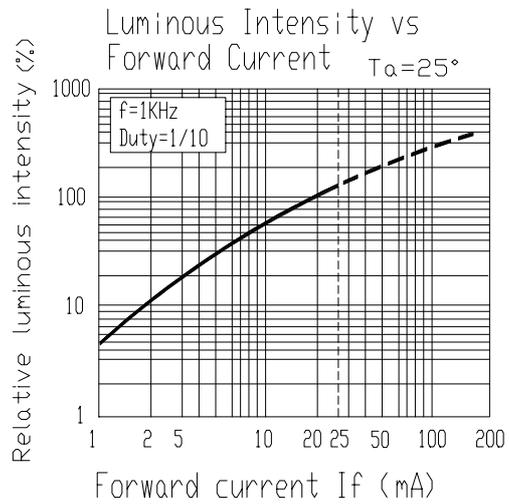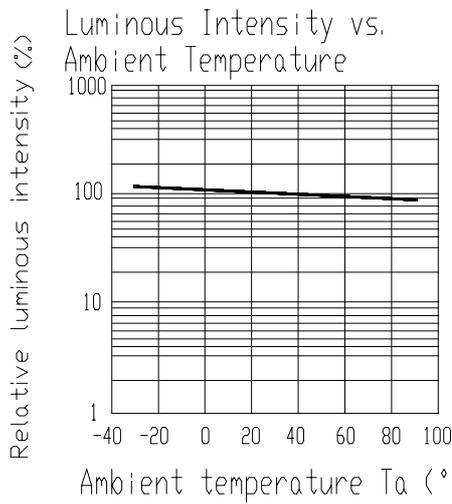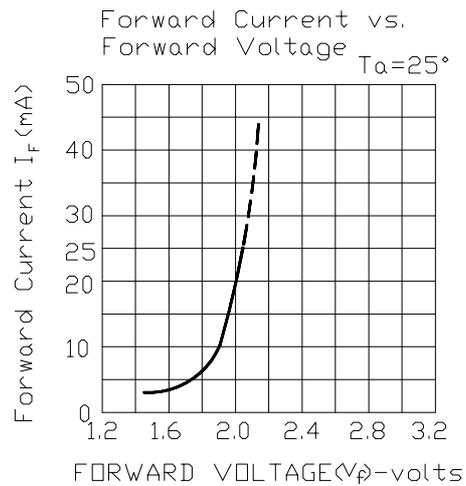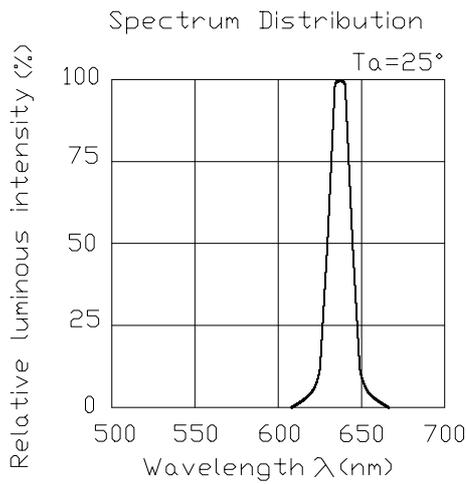

Forward Current Derating Curve

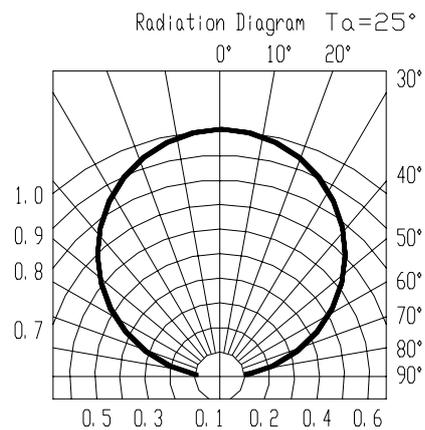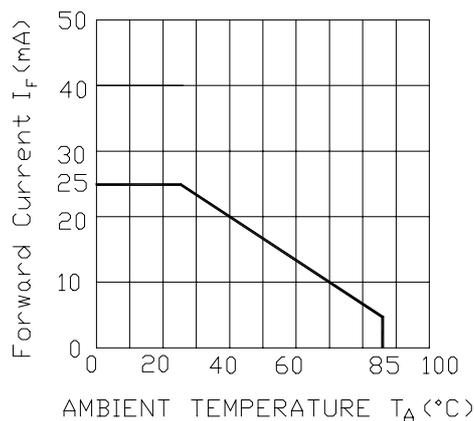





MODEL NO: 67-21USRC/S530-A5/TR8

Device Number : DSE-671-107 REV. 1.0

**TOP LEDs**

ECN : ..... Page: 7/7

■ Reflow Temp / Time :

