

**Technical Data Sheet**  
**Power Top View LEDs with Lens**

**67-31H/YSC-AZ02Z21B9Z5/BT**

**Features**

- P-LCC-3 package.
- High flux output.
- High current capability.
- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Inter reflector.
- Wide viewing angle.
- Suitable for automatic placement equipment.
- Suitable for reflow and wave solder processes.
- Available on tape and reel (12mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version.



**Descriptions**

- The 67-31H series is available in soft orange, red and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

**Applications**

- Indicator and backlight for audio and video equipment.
- Indicator and backlight in office and family equipment.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.


**Device Selection Guide**

Chip	Emitted Color	Resin Color
Material		
AlGaInP	Brilliant Yellow	Water Clear

**Technical Data Sheet**  
**Power Top View LEDs with Lens**

**67-31H/YSC-AZ02Z21B9Z5/BT**

**Package Dimensions**

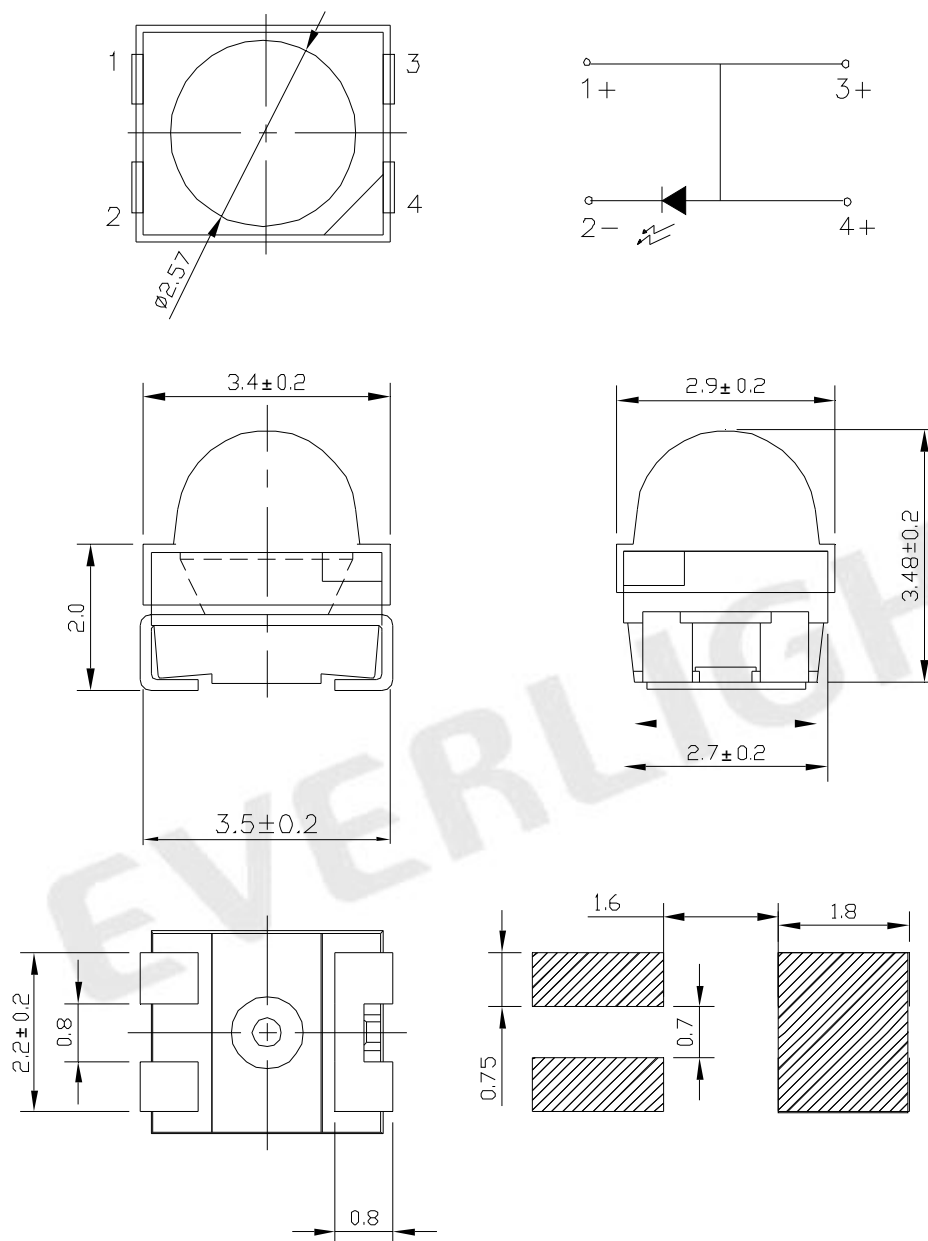

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm; Unit = mm

**Technical Data Sheet**  
**Power Top View LEDs with Lens**

**67-31H/YSC-AZ02Z21B9Z5/BT**

**Absolute Maximum Ratings ( $T_a=25$  )**

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	$I_F$	50	mA
Peak Forward Current	$I_{FP}$	100	mA
Power Dissipation	$P_d$	120	mW
Electrostatic Discharge(HBM)	ESD	2000	V
Operating Temperature	$T_{opr}$	-40 ~ +85	
Storage Temperature	$T_{stg}$	-40 ~ +90	
Soldering Temperature	$T_{sol}$	Reflow Soldering: 260 for 10 sec. Hand Soldering : 350 for 3 sec.	

**Electronic Optical Characteristics**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	$I_v$	5700	-----	14400	mcd	$I_F=50mA$
Viewing Angle	$2\theta_{1/2}$	-----	30	-----	deg	$I_F=50mA$
Peak Wavelength	$\lambda_p$	-----	591	-----	nm	$I_F=50mA$
Dominant Wavelength	$\lambda_d$	585.5	-----	594.5	nm	$I_F=50mA$
Spectrum Radiation Bandwidth	$\lambda$	-----	20	-----	nm	$I_F=50mA$
Forward Voltage	$V_F$	2.15	-----	2.75	V	$I_F=50mA$
Reverse Current	$I_R$	-----	-----	10	$\mu A$	$V_R=5V$

**Notes:**

1. Tolerance of Luminous Intensity  $\pm 11\%$
2. Tolerance of Dominant Wavelength  $\pm 1nm$
3. Tolerance of Forward Voltage  $\pm 0.1V$

**Technical Data Sheet**  
**Power Top View LEDs with Lens**

**67-31H/YSC-AZ02Z21B9Z5/BT**

**Bin Range of Luminous Intensity**

Bin	Min	Max	Unit	Condition
Z02	5700	7200	mcd	I <sub>F</sub> =50mA
Z11	7200	9100		
Z12	9100	11500		
Z21	11500	14400		

**Bin Range of Dominant Wavelengths**

Bin Code	Min.	Max.	Unit	Condition
D3	585.5	588.5	nm	I <sub>F</sub> =50mA
D4	588.5	591.5		
D5	591.5	594.5		

**Bin Range of Forward Voltage**

Bin	Min.	Max.	Unit	Condition
2	2.15	2.35	V	I <sub>F</sub> =50mA
3	2.35	2.55		
4	2.55	2.75		







**Notes:**

1. Tolerance of Luminous Intensity  $\pm 11\%$
2. Tolerance of Dominant Wavelength  $\pm 1\text{nm}$
3. Tolerance of Forward Voltage  $\pm 0.1\text{V}$

**Technical Data Sheet**  
**Power Top View LEDs with Lens**

**67-31H/YSC-AZ02Z21B9Z5/BT**

**Typical Electro-Optical Characteristic Curves**

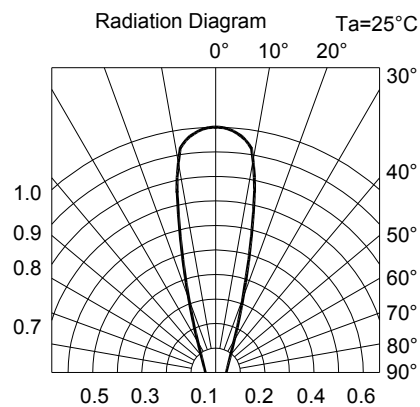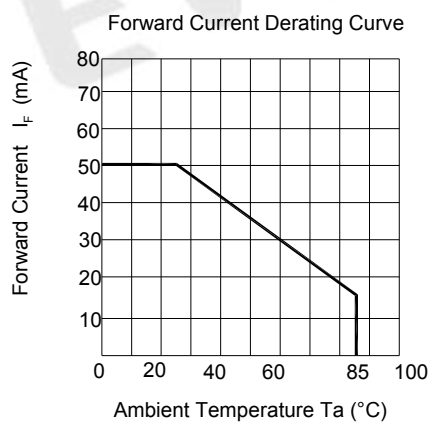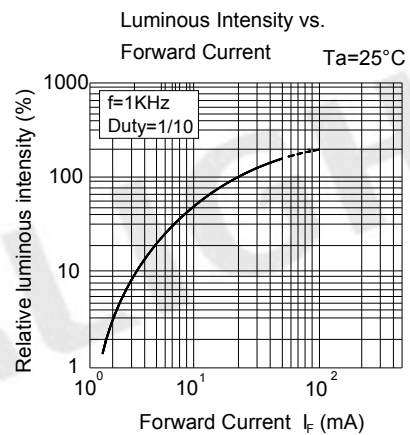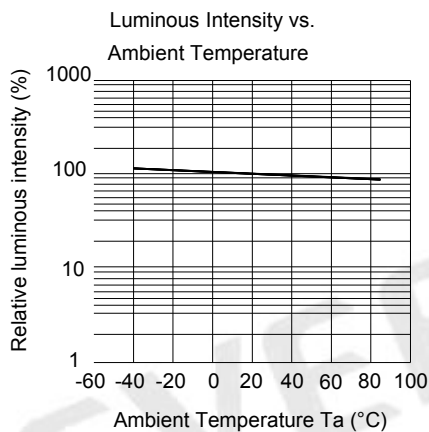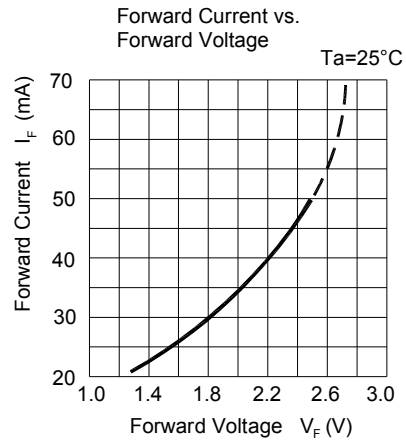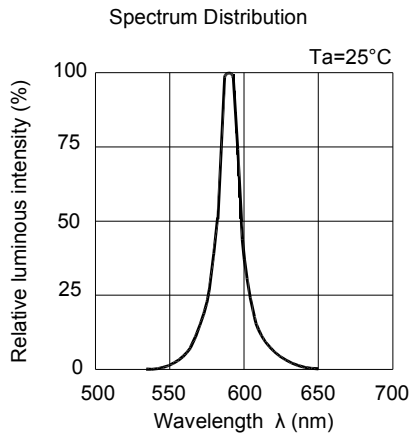

**Technical Data Sheet**  
**Power Top View LEDs with Lens**

**67-31H/YSC-AZ02Z21B9Z5/BT**

**Label Explanation**


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



**Reel Dimensions**

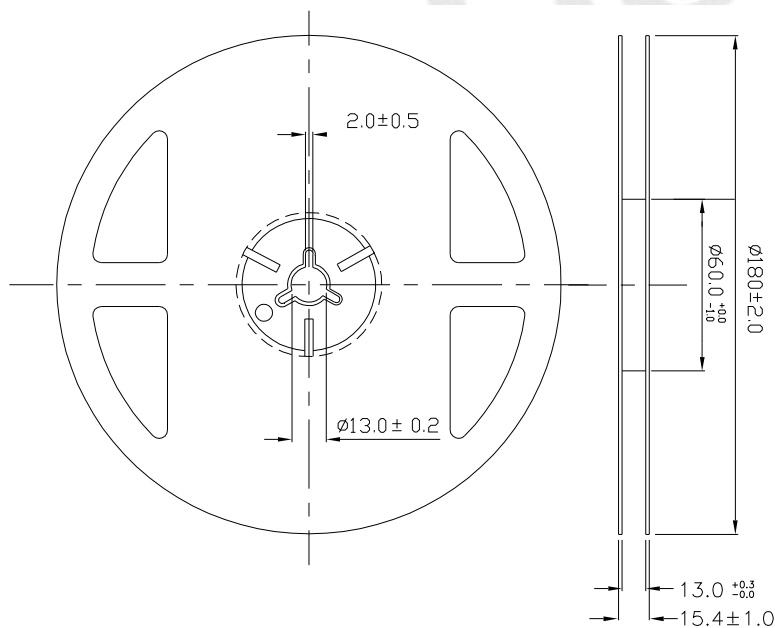


**Note :** Tolerances unless dimension  $\pm 0.1$ mm. Unit = mm

**Technical Data Sheet**  
**Power Top View LEDs with Lens**


**67-31H/YSC-AZ02Z21B9Z5/BT**

**Carrier Tape Dimensions: Loaded Quantity 500 pcs Per Reel**

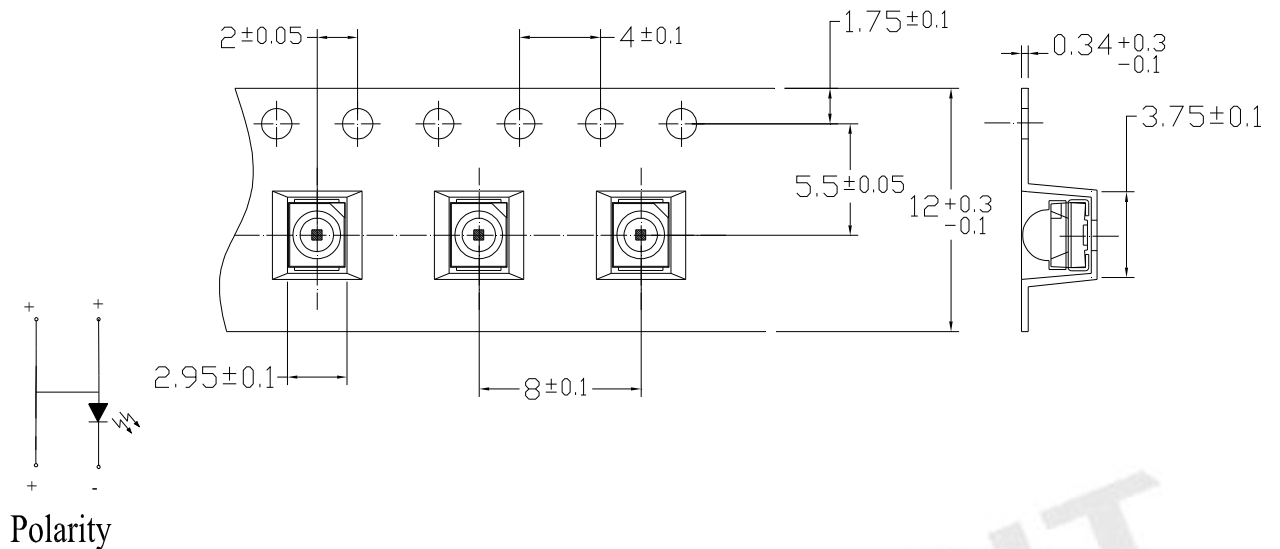

**Note :** Tolerances unless dimension is ±0.1mm, Unit = mm

**Moisture Resistant Packing**

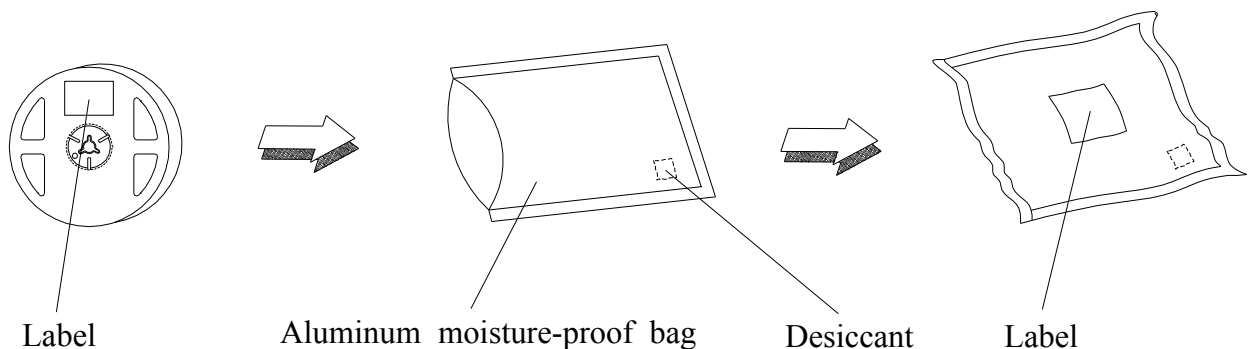

**Technical Data Sheet**  
**Power Top View LEDs with Lens**

**67-31H/YSC-AZ02Z21B9Z5/BT**

**Reliability Test Items and Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260 ±5 Max. 10 sec.	6 Min.	22 PCS	0/1
2	Temperature Cycle	H : +100 15min ∫ 5 min L : -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100 5min ∫ 10 sec L : -10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	I <sub>F</sub> = 50 mA / 25	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 /85%RH	1000 Hrs.	22 PCS.	0/1



## Technical Data Sheet

### Power Top View LEDs with Lens

**67-31H/YSC-AZ02Z21B9Z5/BT**

### Precautions for Use

#### 1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

#### 2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LED should be kept at 30 or less and 90%RH or less.


2.3 After opening the package: The LED floor life is 1 year under 30 or less and 60% RH or less. If unused LED remains, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LED have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5 for 24 hours.

#### 3. Soldering Condition

##### 3.1 Pb-free solder temperature profile

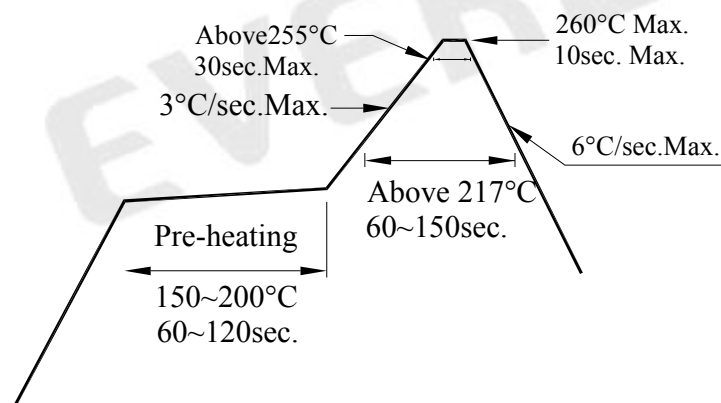

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

## Technical Data Sheet

### Power Top View LEDs with Lens


**67-31H/YSC-AZ02Z21B9Z5/BT**

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

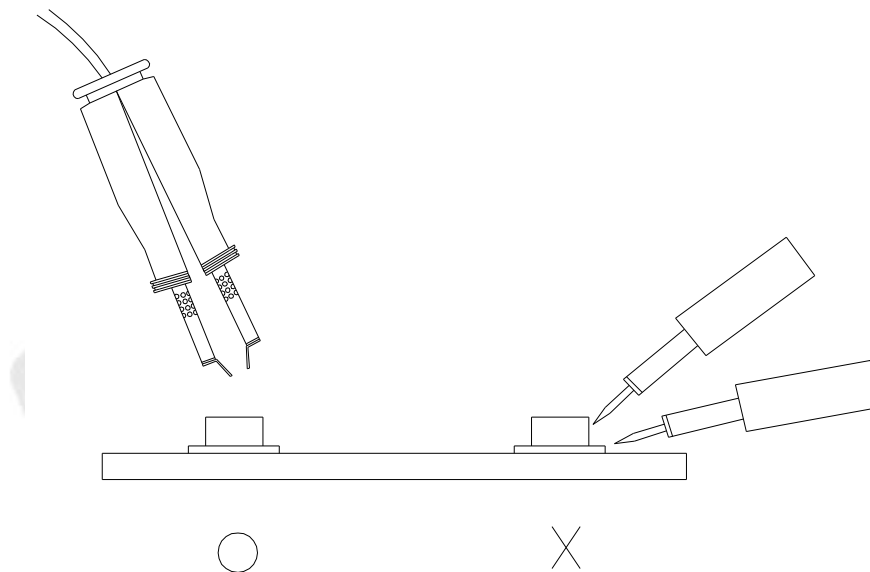

**EVERLIGHT ELECTRONICS CO., LTD.**  
Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936  
Fax: 886-2267-6244, 2267-6189, 2267-6306  
<http://www.everlight.com>