EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

Chip LED with Right Angle Lens

12-21UYOC/S530-XX/TR8

Features

- Package in 8mm tape on 7″ diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.

Descriptions

- The 12-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Chip		Lens Color
Material	**Emitted Color**	
AlGaInP	Super Yellow Orange	Water Clear

Package Outline Dimensions







For reflow soldering (propose)





Notes: Tolerances Unless Dimension ± 0.1mm , Angle± 0.5° ,Unit = mm

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_F	25	mA
Operating Temperature	Topr	-40 ~ +85	℃
Storage Temperature	Tstg	-40~ +90	℃
Soldering Temperature	Tsol	260 (for 5 second)	℃
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current (Duty 1/10 @1KHz)	I_F	160	mA

12-21UYOC/S530-XX/TR8

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	*Chip Rank	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	A2	19	32	-----	mcd	IF=20 mA
		A3	45	50	-----		
		A4	65	80	-----		
		A5	78	100	-----		
		A6	97	125	-----		
Viewing Angle	2θ 1/2	-----	-----	120	-----	deg	IF=20mA
Peak Wavelength	λ p	-----	-----	611	-----	nm	IF=20mA
Dominant Wavelength	λ d	-----	-----	605	-----	nm	IF=20mA
Spectrum Radiation Bandwidth	△ λ	-----	-----	17	-----	nm	IF=20mA
Forward Voltage	VF	-----	-----	2.0	2.4	V	IF=20mA
Reverse Current	IR	-----	-----	-----	10	μA	VR=5V

*12-21UYOC/S530-XX/TR8

Chip Rank

Reel & Carrier Tape Dimensions

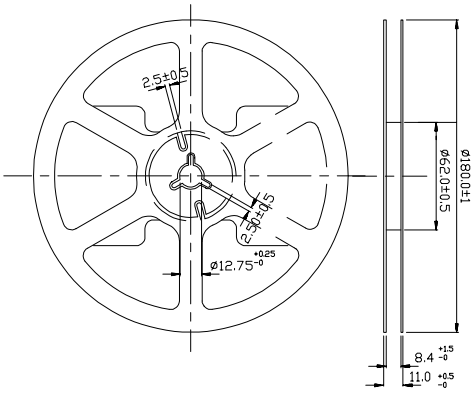

Loaded quantity per reel 2000 PCS/reel

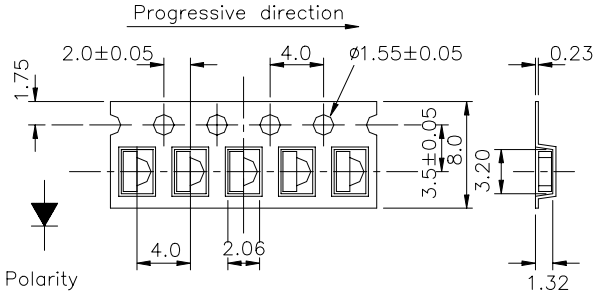

Notes: Tolerances Unless Dimension ± 0.1mm , Angle± 0.5° ,Unit = mm

Typical Electro-Optical Characteristics Curves

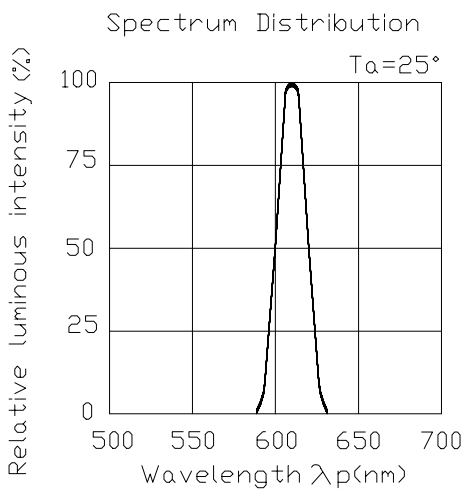

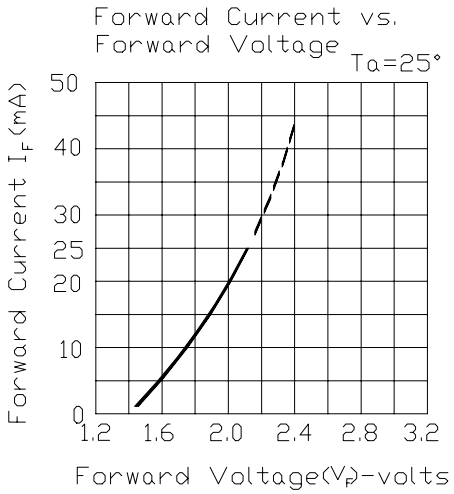

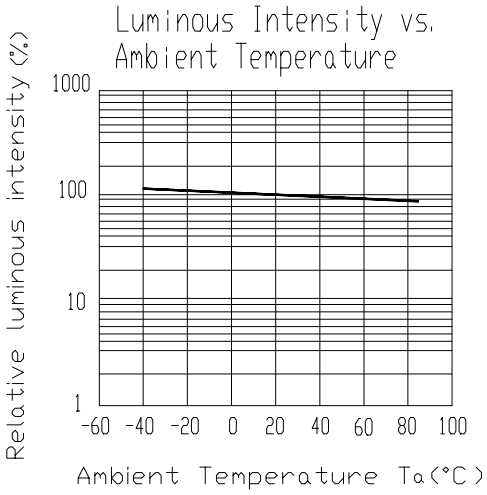

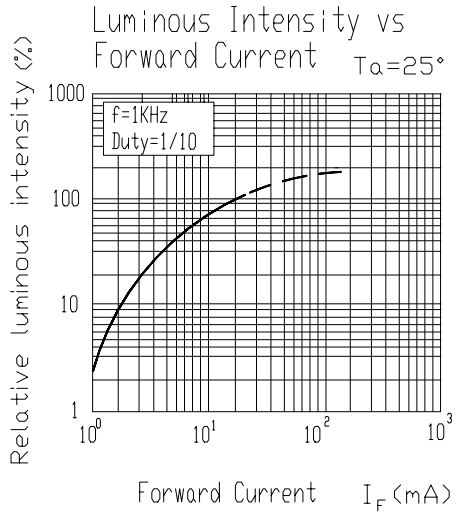

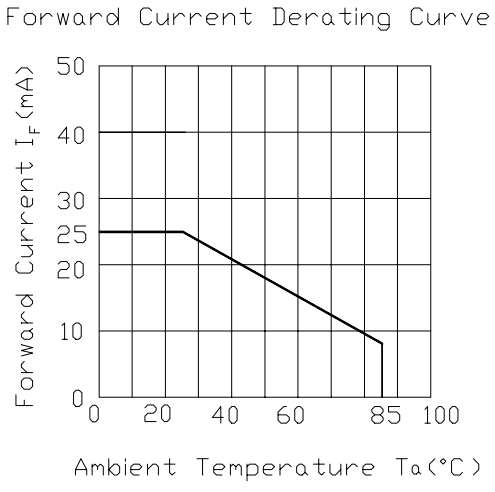

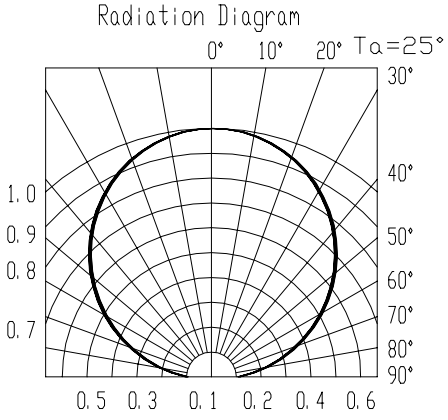

Reliability Test Items And Conditions

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Rc
1	Solder Heat	Temp. : 260℃± 5℃	5 Sec.	76 PCS.	0/1
2	Temperature Cycle	H : +85℃ 30min ∫ 5 min L : -55℃ 30min	50 Cycles	76 PCS.	0/1
3	Thermal Shock	H : +100℃ 5min ∫ 10 sec L : -10℃ 5min	50 Cycles	76 PCS.	0/1
4	High Temperature Storage	Temp. : 100℃	1000 Hrs.	76 PCS.	0/1
5	Low Temperature Storage	Temp. : -55℃	1000 Hrs.	76 PCS.	0/1
6	DC Operating Life	I_F = 20 mA	1000 Hrs.	76 PCS.	0/1
7	High Temperature / High Humidity	85℃/RH85%	1000 Hrs.	76 PCS.	0/1

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage time

2.1 The operation of Temperature and RH are : 5℃~35℃, RH60%.

2.2 Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp proof box with descanting agent. Considering the tape life , we suggest our customers to use our products within a year(from production date).

2.3 If opened more than one week in an atmosphere 5℃~35℃, RH 60%, they should be treated at 60℃± 5℃for 15hrs.

2.4 When you discover that the desiccant in the package has a pink color (Normal = blue) , you should treat them in the same conditions as 2.3.

Soldering heat reliability (DIP)

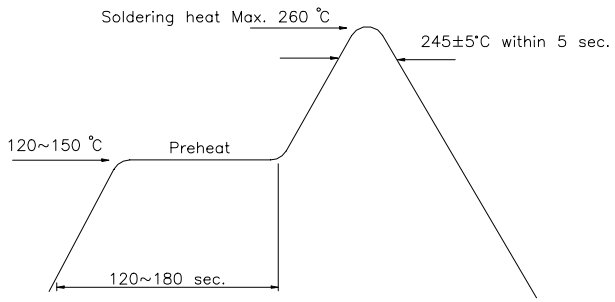

Reflow Temp / Time

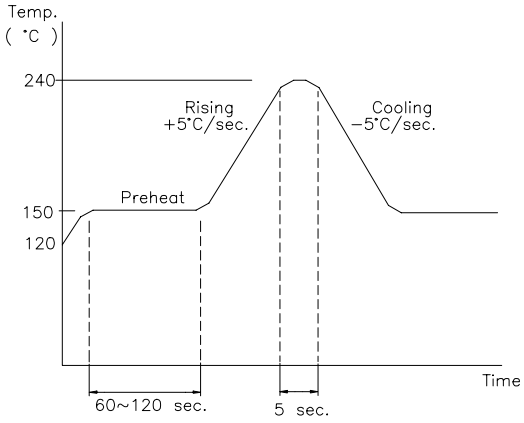

Soldering Iron

Basic spec is ≦5 sec when 260℃.If temperature is higher, time should be shorter (+10℃→ -1sec). Power dissipation of Iron should be smaller than 15 W , and temperature should be controllable. Surface temperature of the device should be under 230 ℃.

Rework

1. Customer must finish rework within 5 sec under 245℃.
2. The head of iron can not touch copper foil.
3. Twin-head type is preferred.

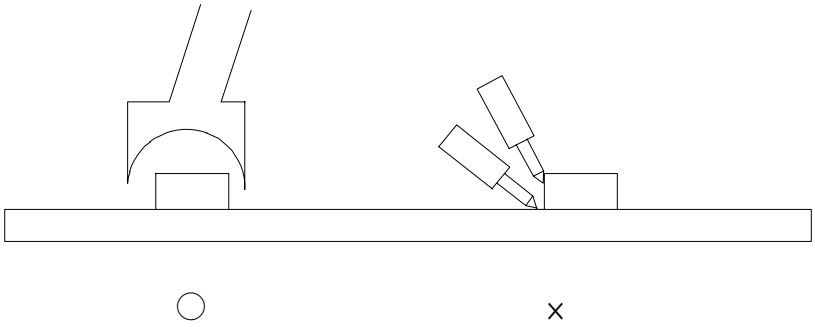

○ ×

EVERLIGHT ELECTRONICS CO., LTD.
Office: No 25, Lane 76, Sec 3, Chung Yang Rd,
Tucheng, Taipei 236, Taiwan, R.O.C
Tel: 886-2-2267-2000, 2267-9936
Fax: 886-2267-6244, 2267-6189, 2267-6306
http://www.everlight.com