



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDM-288-017 REV: 1.1

2.3" 8*8 Dot Matrix Displays

MODEL NO : ELM-2881EWA ECN : _____ Page: 1/5

■ Features :

- Large emitting dot 0.2" diameter.
- Low power/high brightness.

■ Applications:

- Instrument panels
- Digital read out display

■ Description :

- The ELM-2881 series are a large emitting area(5.0mm diameter)LED sources configured in a 64 dots 8*8 matrix array.
- These device is made with white dots and gray surface.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
ELM-2881EWA	GaAsP/GaP	Orange	C.C.

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306


<http://www.everlight.com>




2.3" 8*8 Dot Matrix Displays

MODEL NO : ELM-2881EWA ECN : _____ Page: 2/5

■ Package Dimension:

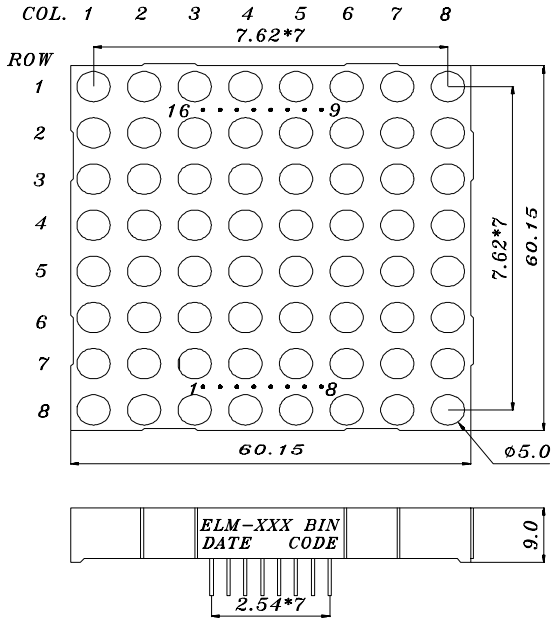

<i>COLUMN CATHODE</i>	
<i>ROW ANODE</i>	
1	<i>ROW ANODE 5</i>
2	<i>ROW ANODE 7</i>
3	<i>COLUMN CATHODE 2</i>
4	<i>COLUMN CATHODE 3</i>
5	<i>ROW ANODE 8</i>
6	<i>COLUMN CATHODE 5</i>
7	<i>ROW ANODE 6</i>
8	<i>ROW ANODE 3</i>
9	<i>ROW ANODE 1</i>
10	<i>COLUMN CATHODE 4</i>
11	<i>COLUMN CATHODE 6</i>
12	<i>ROW ANODE 4</i>
13	<i>COLUMN CATHODE 1</i>
14	<i>ROW ANODE 2</i>
15	<i>COLUMN CATHODE 7</i>
16	<i>COLUMN CATHODE 8</i>

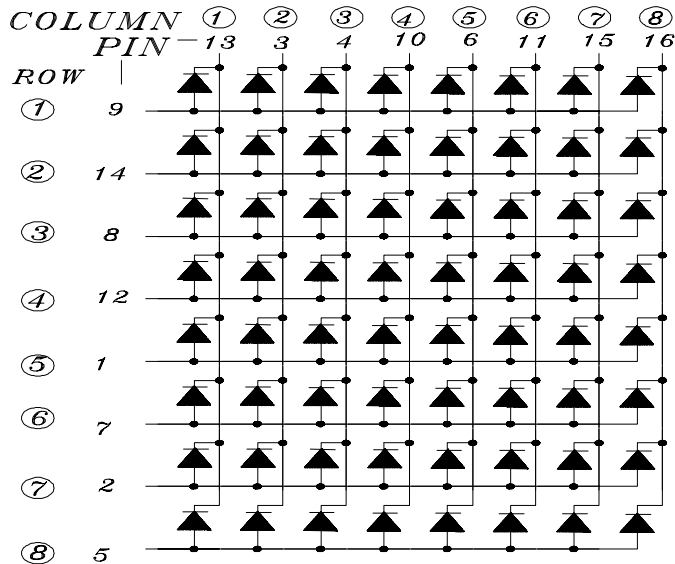

■ NOTES:

- 1.All dimensions are millimeters , tolerance is 0.25mm unless otherwise noted.
 - 2.Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



2.3" 8*8 Dot Matrix Displays

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	30	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA

■ Electronic optical characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv	2.8	5.3	----	mcd	If=10mA
Peak Wavelength	λ p	----	635	----	nm	If=20mA
Dominant Wavelength	λ d	----	625	----	nm	If=20mA
Spectrum Radiation Bandwidth	△ λ	----	45	----	nm	If=20mA
Forward Voltage	Vf	1.7	2.0	2.6	V	If=20mA
Reverse Current	Ir	----	----	10	μ A	Vr=5V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDM-288-017 REV: 1.1

2.3" 8*8 Dot Matrix Displays

MODEL NO : ELM-2881EWA ECN : _____ Page: 4/5

■ Reliability test item and condition:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min } 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min } 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1

--	--	--	--	--	--



2.3" 8*8 Dot Matrix Displays

