



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDDS-100-013 REV: 1

1.0" Single Digit Displays

PART NO. : ELS-1006SURWB/S530-A2 ECN : _____ Page: 1/5

■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

■ Descriptions :

- The ELS-1006 series is a large 25.4mm (1.0")high seven segment display designed for viewing distances up to 7 meters.
- These displays provide excellent reliability in bright ambient light.
- These devices are made with white segments and black surface.

PART NO.	Chip	
	Material	Emitted Color
ELS-1006SURWB/S530-A2	AlGaInP	Hyper Red

OFFICE : 7c Building ,Lian Hua Port Industrial District, Lian Hua Shan Bonded Pricessing
Zone Pan Yu, Guang Zhou, China

TEL : (020) 84860913 , 84860914

FAX : (020) 84860600


<http://www.everlight.com>

T02870 50001402




0.36" Single Digit Displays

■ Package Dimensions:

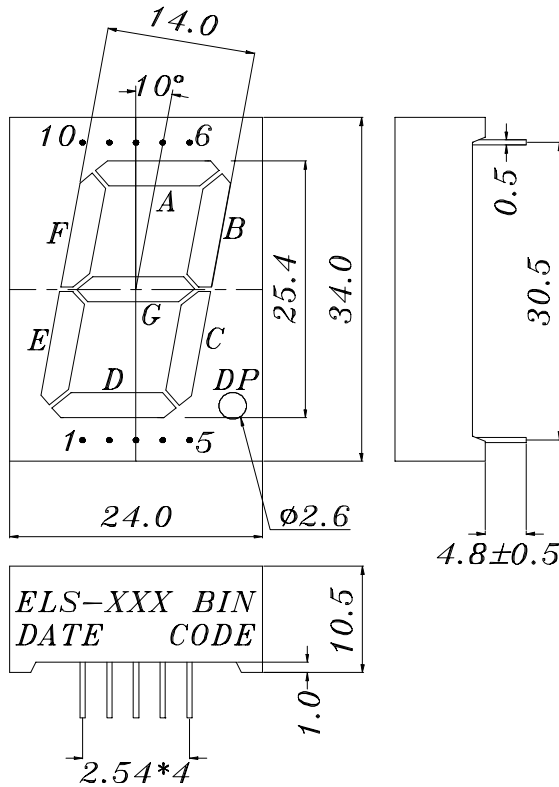

- COMMON ANODE
- 1 CATHODE E
 - 2 CATHODE D
 - 3 COMMON ANODE
 - 4 CATHODE C
 - 5 CATHODE DP
 - 6 CATHODE B
 - 7 CATHODE A
 - 8 COMMON ANODE
 - 9 CATHODE F
 - 10 CATHODE G

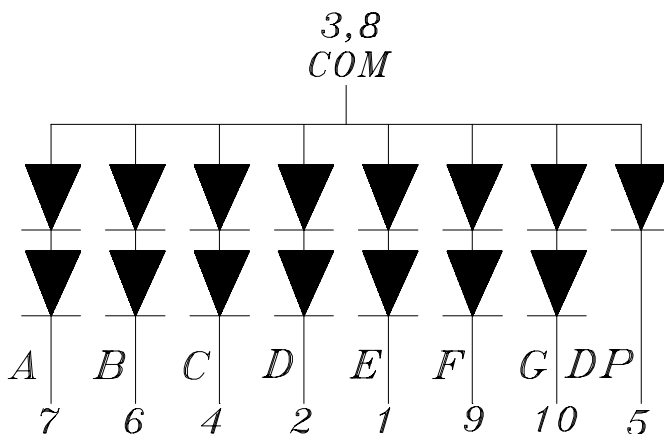

■ Notes:

- 1. All dimensions are in millimeters, tolerance is 0.25mm unless otherwise noted.
 - 2. Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDDS-100-013 REV: 1

0.36" Single Digit Displays

PART NO. : ELS-1006SURWB/S530-A2 ECN : Page: 3/5

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	IF(Peak)	160	mA

■ Electronic optical characteristics :

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Per segment	Iv	----	5.0	----	mcd	IF=2mA
			11.0	24.0	----		IF=10mA
	Per decimal point		----	1.5	----	mcd	IF=2mA
			3.5	8.0	----		IF=10mA
Peak Wavelength		λp	----	632	----	nm	IF=20mA
Dominant Wavelength		λd	----	624	----	nm	IF=20mA
Spectrum Radiation Bandwidth		$\Delta \lambda$	----	20	----	nm	IF=20mA
Forward Voltage		V _F	----	2.0	2.4	V	IF=20mA
Reverse Current		I _R	----	----	100	μA	VR=5V






0.36" Single Digit Displays

PART NO. : ELS-1006SURWB/S530-A2 ECN :

■ Typical Electro-Optical Characteristic Curves:

(SUR)

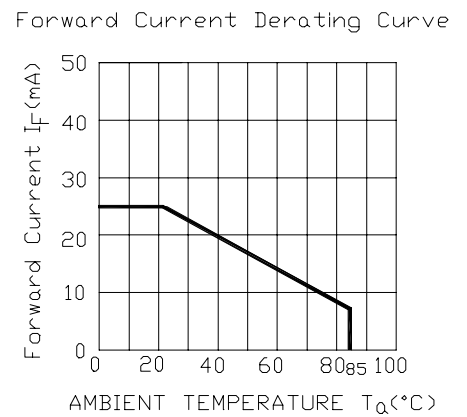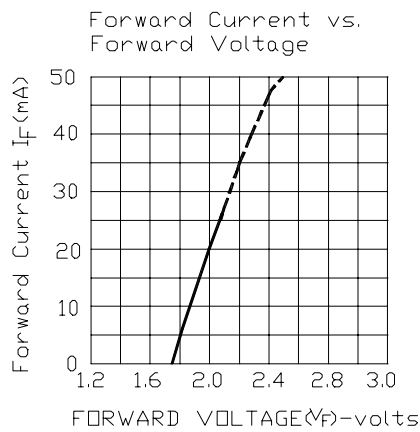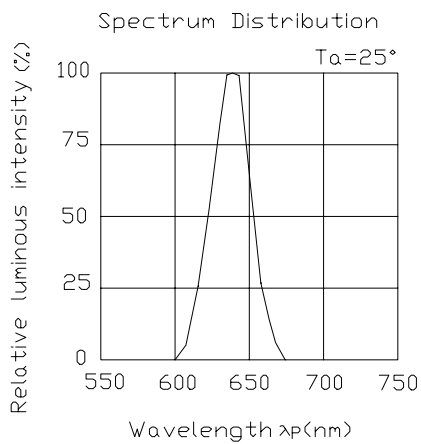



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDDS-100-013 REV: 1

0.36" Single Digit Displays

PART NO. : ELS-1006SURWB/S530-A2 ECN : _____ Page: 5/5

■ Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	IF = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C /85% RH	1000 HRS	76 PCS	0/1

--	--	--	--	--	--