



Device Number : DDS-400-006 REV: 1.0

## 4.0" Single Digit Display

MODEL NO : ELS-4006UBW ECN :                      Page: 1/5

### ■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

### ■ Applications:

- Audio equipment
- Instrument panels
- Digital readout display

### ■ Description :

- The ELS-4006 series is a large 101.5mm (4.0")high seven segment display design for viewing distances up to 7 meters.
- These displays provide excellent reliability in bright ambient light .
- These device is made with white segments and white surface.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
ELS-4006UBW	GaN/Sic Substrate	Blue	C.A.

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-400-006

REV: 1.0



4.0" Single Digit Display

MODEL NO : ELS-4006UBW


ECN : \_\_\_\_\_

Page: 2/5

## Package Dimension:

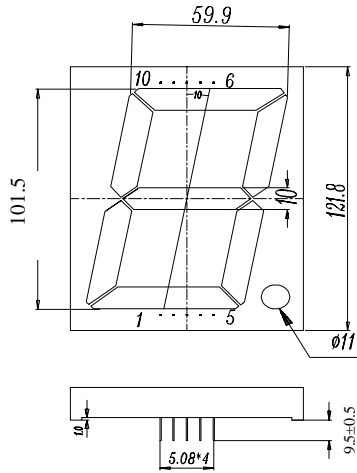

- COMMON ANODE
- 1 COMMON ANODE
- 2 CATHODE E
- 3 CATHODE D
- 4 CATHODE C
- 5 CATHODE DP
- 6 CATHODE B
- 7 CATHODE A
- 8 COMMON ANODE
- 9 CATHODE F
- 10 CATHODE G

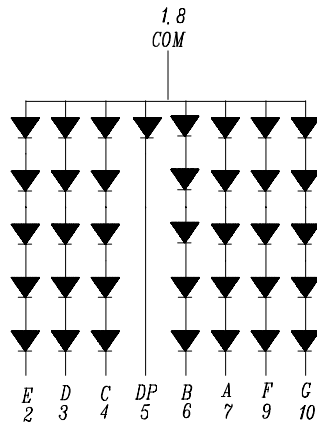

## NOTES:

1. All dimensions are millimeters, tolerance is 0.25mm unless otherwise noted.
  2. Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.

AS99035 S991596



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-400-006 REV: 1.0

## 4.0" Single Digit Display

MODEL NO : ELS-4006UBW ECN :          Page: 3/5

### ■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	V <sub>r</sub>	5	V
Forward Current	I <sub>f</sub>	30	mA
Operating Temperature	T <sub>opr</sub>	-40 to +85	°C
Storage Temperature	T <sub>stg</sub>	-40 to +100	°C
Soldering Temperature	T <sub>sol</sub>	260 ± 5	°C
Power Dissipation	P <sub>d</sub>	140	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	I <sub>f</sub> (Peak)	70	mA

### ■ Electronic optical characteristics :

Parameter		Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Per segment	I <sub>v</sub>	42	60	----	mcd	I <sub>f</sub> =10mA
	Per decimal point		24	36	----		
Peak Wavelength		λ <sub>p</sub>	----	430	----	nm	I <sub>f</sub> =20mA
Dominant Wavelength		λ <sub>d</sub>	----	466	----	nm	I <sub>f</sub> =20mA
Spectrum Radiation Bandwidth		Δλ	----	65	----	nm	I <sub>f</sub> =20mA
Forward Voltage		V <sub>f</sub>	----	3.8	4.5	V	I <sub>f</sub> =20mA
Reverse Current		I <sub>r</sub>	----	----	10	μA	V <sub>r</sub> =5V

AS99035 S991596



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-400-006 REV: 1.0

4.0" Single Digit Display

MODEL NO : ELS-4006UBW ECN :                      Page: 4/5

■ Reliability test item and condition:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1



Device Number : DDS-400-006 REV: 1.0

4.0" Single Digit Display

MODEL NO: ELS-4006UBW ECN :                      Page: 5/5

## Typical Electro-Optical Characteristic Curves:

