EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

1206 Package Chip LED with Inner lens

11-21/R6C-AQ1R2LZ/2T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version.

Descriptions

- The 11-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

D. AND		I Cala	
Part No.	Material	Emitted Color	Lens Color
11-21/R6C-AQ1R2LZ/2T	AlGaInP	Brilliant Red	Water Clear





Everlight Electronics Co., Ltd. Device No:SZDSE-111-R07


http://www.everlight.com Prepared date: 27 –Feb -2006 Rev. 1 Page: 1 of 10

Prepared by: Liu tao


Package Outline Dimensions








For reflow soldering (propose)





Notes: The tolerances unless mentioned are ± 0.1 , unit=mm.



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}$ C
Electrostatic Discharge(HBM)	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	60	mA
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec Hand Soldering: 350 °C for 3 sec.	

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	72		180	mcd	
Viewing Angle	2 \theta 1/2		60		deg	
Peak Wavelength	λр		632		nm	
Dominant Wavelength	λd	617.5		633.5	nm	I _F =10mA
Spectrum Radiation Bandwidth	Δλ		20		nm	
Forward Voltage	VF	1.70		2.30	V	
Reverse Current	Ir			10	μ A	V _R =5V

Notes:

1.Tolerance of Luminous Intensity: ±10%2.Tolerance of Dominant Wavelength: ±1nm

3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd.

Device No:SZDSE-111-R07 Prepared date: 27 –Feb -2006 Prepared by: Liu tao

http://www.everlight.com

Rev. 1

Page: 3 of 10



Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
A	E4	617.5	621.5		$I_F = 10 \text{mA}$
	E5	621.5	625.5	nm	
	E6	625.5	629.5		
	E7	629.5	633.5		

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
Q1	72.0	90.0		
Q2	90.0	112		
R1	112	140	mcd	$I_F = 10 \text{mA}$
R2	140	180		

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition
	19	1.70	1.80		
	20	1.80	1.90		
	21	1.90	2.00		
L	22	2.00	2.10	V	I _F =10mA
	23	2.10	2.20		
	24	2.20	2.30		


Notes:

1.Tolerance of Luminous Intensity: ±10%2.Tolerance of Dominant Wavelength: ±1nm

3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 4 of 10 Device No:SZDSE-111-R07 Prepared date: 27 –Feb -2006 Prepared by: Liu tao

Typical Electro-Optical Characteristics Curves

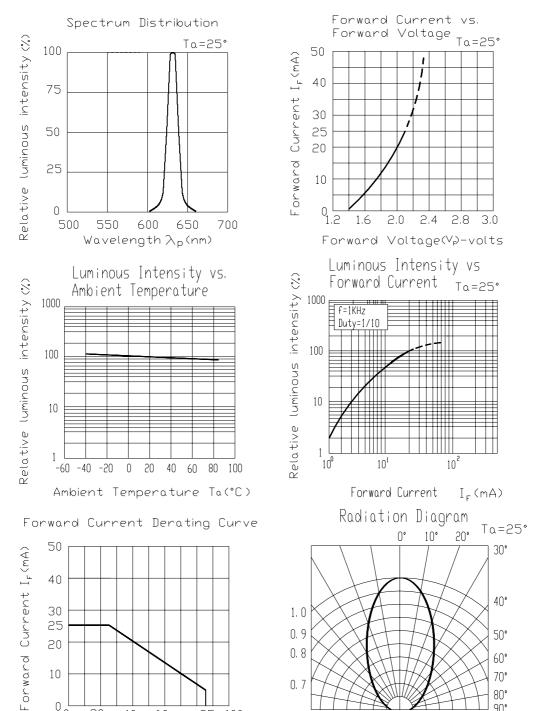

60

Ambient Temperature Ta(°C)

85 100

40

0.7

Prepared date: 27 -Feb -2006

0.5 0.3

0. 1

0. 2

0.4 0.6

Prepared by: Liu tao

80°

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank




Reel Dimensions

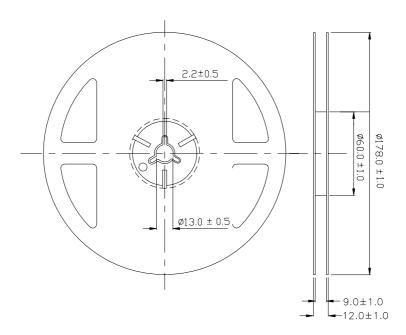


Note: The tolerances unless mentioned are ± 0.1 , Unit = mm.

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

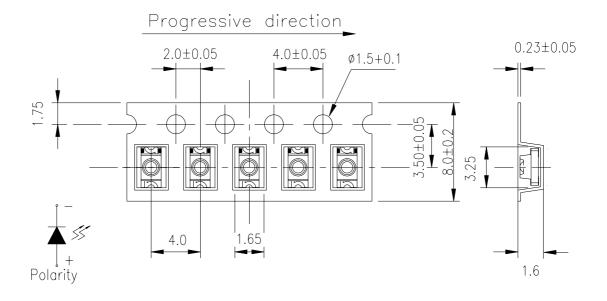

Note: The tolerances unless mentioned are ± 0.1 , Unit = mm.

Moisture Resistant Packaging

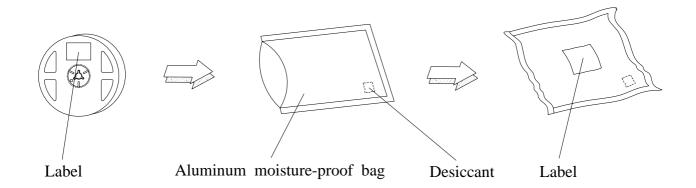

Everlight Electronics Co., Ltd.

Device No:SZDSE-111-R07

http://www.everlight.com

Prepared date: 27 -Feb -2006

Rev. 1

Page: 7 of 10

Prepared by: Liu tao



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:SZDSE-111-R07

http://www.everlight.com Prepared date: 27 –Feb -2006

Prepared by: Liu tao

Page: 8 of 10

Rev. 1

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30° C or less and 60%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

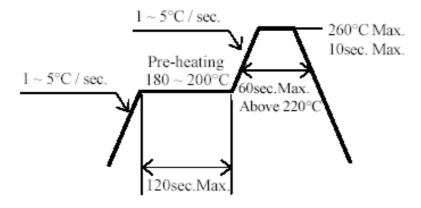

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 9 of 10

Device No:SZDSE-111-R07 Prepared date: 27 – Feb - 2006 Prepared by: Liu tao




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

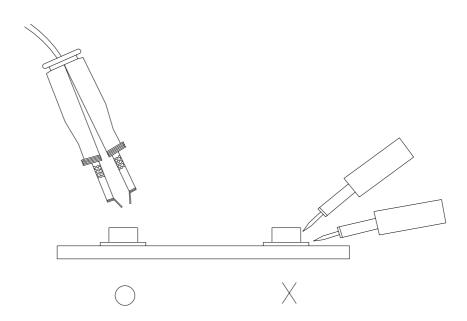

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com

Everlight Electronics Co., Ltd. Device No:SZDSE-111-R07

http://www.everlight.com

Rev. 1 Page: 10 of 10

Prepared date: 27 –Feb -2006

Prepared by: Liu tao