# EVERLIGHT ELECTRONICS CO.,LTD.

### **Technical Data Sheet**

# 0.6mm Height Flat Top LED

#### 19-213/S2C-AN2P2B/3T

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version

#### **Descriptions**

- The 19-213 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**


- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.


#### **Device Selection Guide**


D. AN.		T (1)	
Part No.	Material	<b>Emitted Color</b>	Lens Color
19-213/S2C-AN2P2B/3T	AlGaInP	Brilliant Orange	Water Clear




#### **Package Outline Dimensions**








For reflow soldering (Propose)





**Note:** Tolerances Unless Dimension is  $\pm 0.1$ mm, Unit = mm

### **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit	
Reverse Voltage	$V_R$	5	V	
Forward Current	${ m I}_{ m F}$	25	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40~ +90	$^{\circ}\!\mathbb{C}$	
Electrostatic Discharge(HBM)	ESD	2000	V	
Power Dissipation	Pd	60	mW	
Peak Forward Current (Duty 1/10 @1KHz)	IFP	60	mA	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

### **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	36.0		72.0	mcd	
Viewing Angle	2 \theta 1/2		120		deg	
Peak Wavelength	λр		611		nm	
Dominant Wavelength	λd	600.5		612.5	nm	I <sub>F</sub> =20mA
Spectrum Radiation Bandwidth	Δλ		17		nm	
Forward Voltage	$V_{\mathrm{F}}$	1.75		2.35	V	
Reverse Current	$I_R$			10	$\mu$ A	V <sub>R</sub> =5V

#### **Notes:**

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd.

http://www.everlight.com

Page: 3 of 10

Device No:SZDSE-193-S05

Prepared date:13-Jan-2006

Prepared by: Liu tao



### Bin Range Of Dom. Wavelength

			,			
Group	Bin	Min	Max	Unit	Condition	
A D8 D9 D10 D11	D8	600.5	603.5			
	D9	603.5	606.5		T 20 4	
	606.5	609.5	nm	I <sub>F</sub> =20mA		
	609.5	612.5				

#### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
N2	36.0	45.0		
P1	45.0	72.0	mcd	I <sub>F</sub> =20mA
P2	72.0	90.0		


**Bin Range Of Forward Voltage** 

Group	Bin	Min	Max	Unit	Condition	
В	0	1.75	1.95			
	1	1.95	2.15	V	I <sub>F</sub> =20mA	
	2	2.15	2.35			

#### **Notes:**

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V

### **Typical Electro-Optical Characteristics Curves**

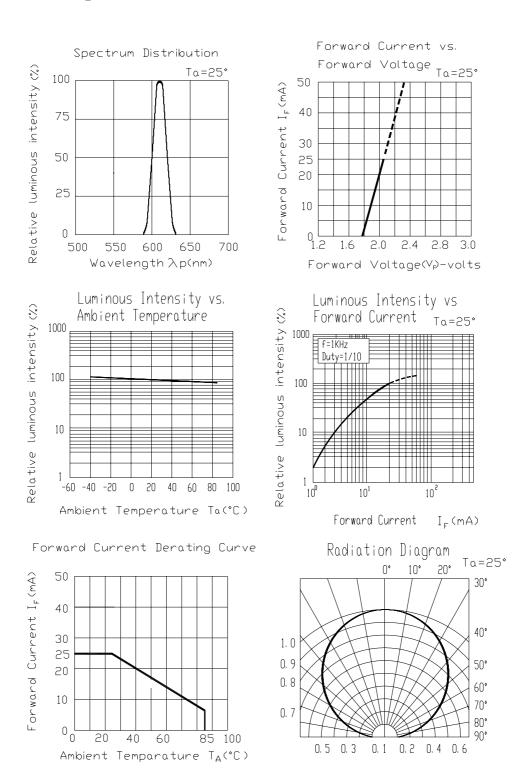

### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 




#### **Reel Dimensions**




**Note:** The tolerances unless mentioned are  $\pm 0.1$ , Unit = mm.

# Loaded quantity 3000 PCS per reel

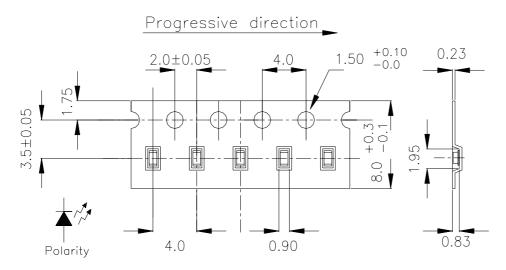

**Note:** Tolerances Unless Dimension is  $\pm 0.1$ mm, Unit = mm

### **Moisture Resistant Packaging**

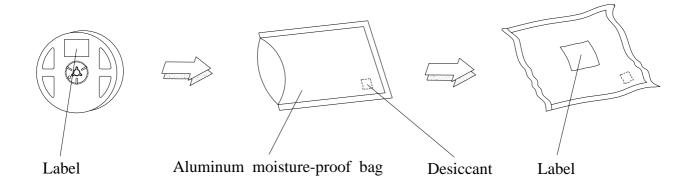



### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : $260^{\circ}$ C $\pm 5^{\circ}$ C Min. 5 sec.	6 min.	22 Pcs.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min. $\int$ 5 min. $L: -40^{\circ}\mathbb{C}$ 15min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	H:+100°C 5min. ∫ 10 sec. L:-10°C 5min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C/R.H85%	1000 Hrs.	22 Pcs.	0/1

#### **Precautions For Use**

#### 1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

#### 3. Soldering Condition

#### 3.1 Pb-free solder temperature profile

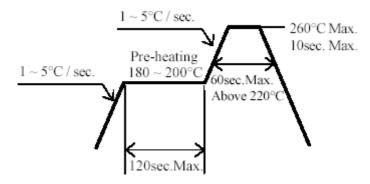

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 9 of 10

Device No:SZDSE-193-S05 Prepared date:13-Jan-2006 Prepared by: Liu tao



#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

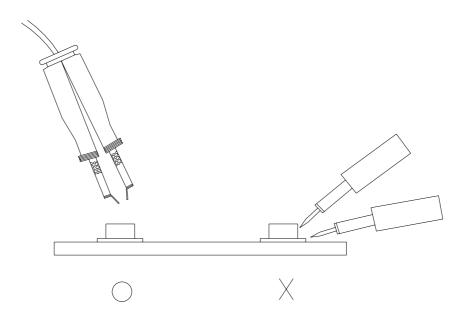

#### EVERLIGHT ELECTRONICS CO., LTD.

Office: No 355, Zhong Shan North Rd, WuJiang, Economy Development Zone(YunXi Area), SongLing Town, WuJiang City, Jiang Su PRC, China. Tel: 0512-63409123-1603 Fax: 0512-63409123-1510 http://www.everlight.com

Everlight Electronics Co., Ltd.

http://www.everlight.com

Page: 10 of 10

Device No:SZDSE-193-S05

Prepared date:13-Jan-2006

Prepared by: Liu tao