# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

### **Technical Data Sheet**

## 0603 Package Chip LED (0.2mm Height)

#### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

#### Descriptions

- The 19-219 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.


#### Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

#### **Device Selection Guide**


Part No.	Chip	Emitted Color	Resin Color	
r art 190.	Material	Emitted Color		
19-219/G7C-BK1L2VY/3T	AlGaInP	Brilliant Yellow Green	Water Clear	


### 19-219/G7C-BK1L2VY/3T





#### **Package Outline Dimensions**

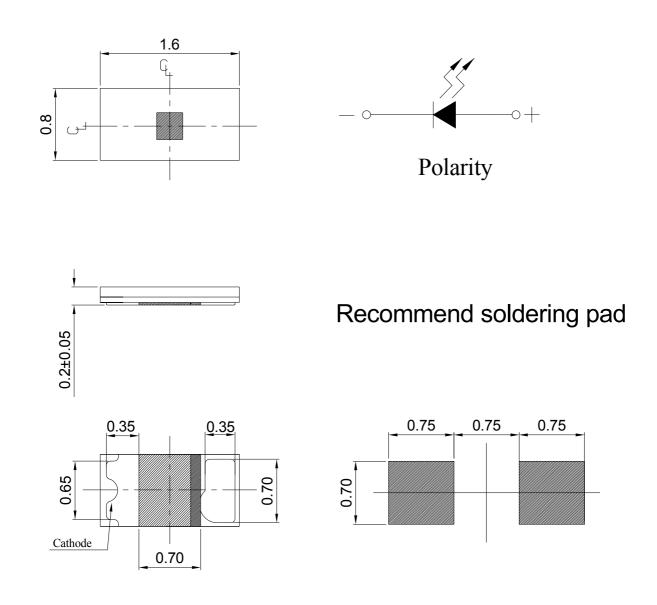



Everlight Electronics Co., Ltd. Device No. : DSE-199-G01

#### Parameter Symbol Rating Unit V Reverse Voltage Vr 5 25 Forward Current $\mathbf{I}_{\mathbf{F}}$ mA Peak Forward Current 60 IFP mA (Duty 1/10 @1KHz) Power Dissipation Pd 60 mW Electrostatic Discharge(HBM) ESD 2000 V °C $-40 \sim +85$ **Operating Temperature** Topr °C Storage Temperature $-40 \sim +90$ Tstg Reflow Soldering : 260 $^{\circ}$ C for 10 sec. Soldering Temperature Tsol Hand Soldering : $350 \degree C$ for 3 sec.

#### Absolute Maximum Ratings (Ta=25°C)

#### Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	7.2		18.0	mcd	
Viewing Angle	2 <i>θ</i> 1/2		130		deg	
Peak Wavelength	λp		575		nm	
Dominant Wavelength	λd	567.5		575.5	nm	IF=5mA
Spectrum Radiation Bandwidth	$ riangle \lambda$		20		nm	
Forward Voltage	VF	1.7		2.2	V	
Reverse Current	Ir			10	$\mu A$	VR=5V

#### Notes:

#### 1.Tolerance of Luminous Intensity ±11%

#### 2.Tolerance of Dominant Wavelength ±1nm

#### 3.Tolerance of Forward Voltage ±0.05V

#### Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition	
B C15 C16 C17 C18	C15	567.5	569.5	nm		
	C16	569.5	571.5		IF=5mA	
	C17	571.5	573.5			
	C18	573.5	575.5			

#### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
K1	7.2	9.0		
K2	9.0	11.5		IF=5mA
L1	11.5	14.5	mcd	
L2	14.5	18.0		


#### **Bin Range Of Forward Voltage**


Group	Bin	Min	Max	Unit	Condition
	19	1.70	1.80		
	20	1.80	1.90		
V	21	1.90	2.00	V	IF=5mA
	22	2.00	2.10		
	23	2.10	2.20		

#### Notes:

- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.05V

#### **Typical Electro-Optical Characteristics Curves**

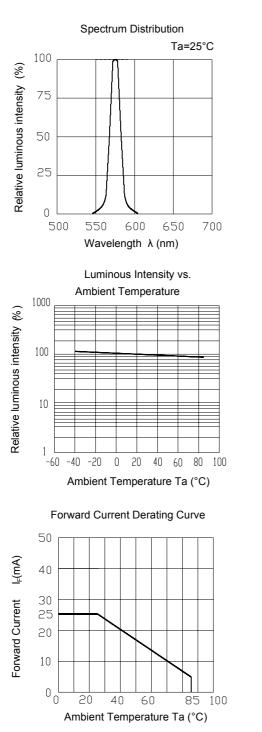

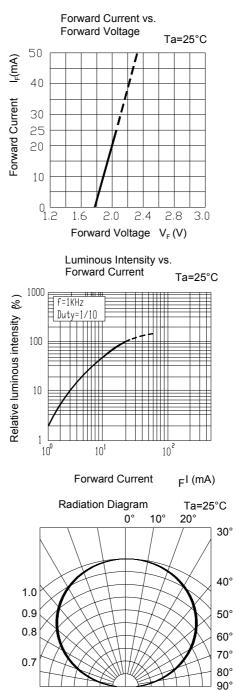

Everlight Electronics Co., Ltd. Device No. : DSE-199-G01 http://www.everlight.com Prepared date: 19-Mar-2008

0.5 0.3

0.1


0.2

0.4 0.6


Rev.1 Page: 5 of 10 Prepared by: Ashley Kuo

#### Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**




#### **Reel Dimensions**

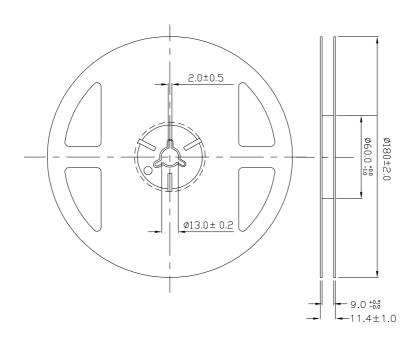


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

#### **Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel**

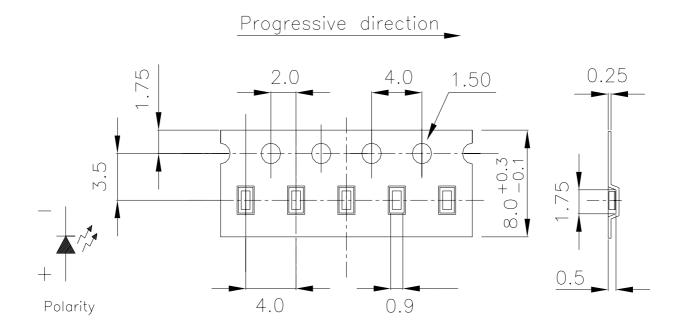

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

#### **Moisture Resistant Packaging**

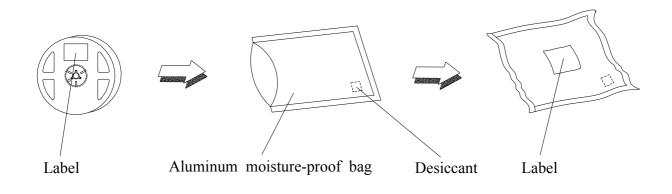

Everlight Electronics Co., Ltd. Device No. : DSE-199-G01 http://www.everlight.com Prepared date: 19-Mar-2008 Rev.1 Page: 7 of 10 Prepared by: Ashley Kuo

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min $\int 10 \sec L$ L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
  - 2.3 After opening the package: The LED's floor life is 1 year under 30℃ or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
  - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5°C for 24 hours.
  - 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

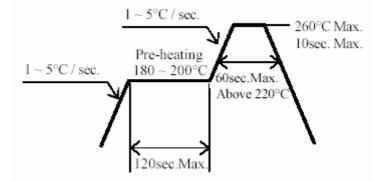


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

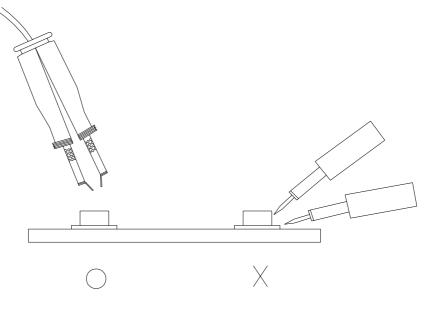

#### **EVERLIGHT ELECTRONICS CO., LTD.** Office: No 25, Lane 76, Sec 3, Chung Yang Rd,

Tucheng, Taipei 236, Taiwan, R.O.C

*Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

Everlight Electronics Co., Ltd. Device No. : DSE-199-G01