

### **Technical Data Sheet**

## 1.3 mm Height Subminiature, Axial Flat Top LEDs

### 28-21 SYGC/S530-XX/XXX

28-21

#### **Features**

- Package in 12mm tape on 7" diameter reels.
- EIA Std. package.
- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version.

#### **Descriptions**

- The 28-21 SMD taping is much smaller than leaded components. Thus enable smaller board size. Higher packing density. Reduced storage space and finally smaller equipment to be obtained.
- Besides, light weight makes them ideal for miniature.
- Further more by automation assembly machines the accuracy is anticipated.

#### **Applications**

- Small indicator for outdoor applications.
- Flat backlight for LCD, switches and symbols.
- Indicator and backlight in office equipment.
- Indicator and backlight for battery driven equipment.
- Indicator and backlight for audio and video equipment.
- Automotive : backlighting in dashboards and switches.
- General use.

#### **Device Selection Guide**

D. AN.		I Cala	
Part No.	Material	<b>Emitted Color</b>	Lens Color
28-21SYGC/S530-XX/XXX	AlGaInP	Brilliant Yellow Green	Water Clear

ment.
ipment.
vitches.


**F8/TR8** 

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 1 of 9



## 28-21 SYGC/S530-XX/XXX

## **Package Outline Dimensions**

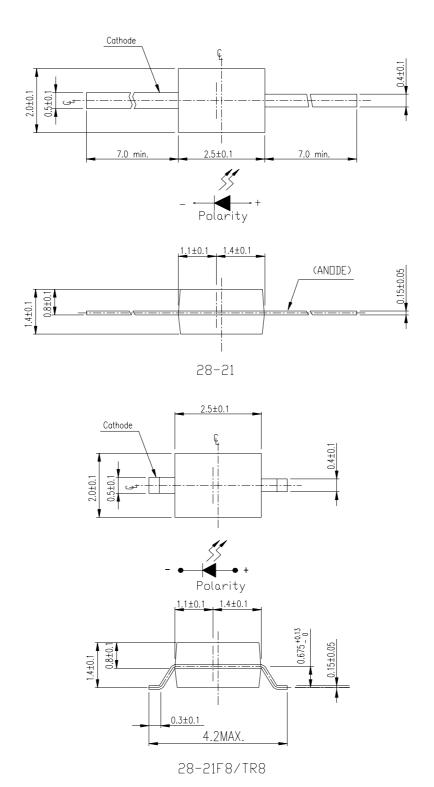

**Note:** Tolerances Unless Dimension is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 2 of 9



## 28-21 SYGC/S530-XX/XXX

## **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	$I_{\mathrm{F}}$	25	mA
Operating Temperature	Topr	<b>-</b> 40 ∼ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}\! \mathbb{C}$
Electrostatic Discharge	ESD	2000	V
Power Dissipation	$P_d$	60	mW
Peak Forward Current(Duty 1/10 @ 1KHz)	$I_{\mathrm{FP}}$	60	mA
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	$^{\circ}\!\mathbb{C}$

### **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Rank	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	$I_{ m V}$	E1	7	13		deg I <sub>F</sub>	
		E2	10	19			
		E3	16	27			
		E4	20	33			
Viewing Angle	201/2			150			$I_F=20mA$
Peak Wavelength	λр			575			
Dominant Wavelength	λd			573			
Spectrum Radiation Bandwidth	Δλ			20			
Forward Voltage	$V_{\mathrm{F}}$		1.7	2.0	2.4	V	,
Reverse Current	$I_R$				10	μΑ	V <sub>R</sub> =5V


#### **Notes:**


1.Tolerance of Luminous Intensity ±10%


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 9


### 28-21 SYGC/S530-XX/XXX


### **Typical Electro-Optical Characteristics Curves**

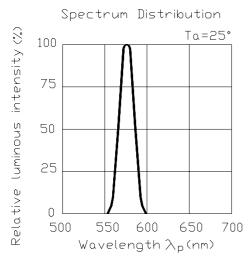




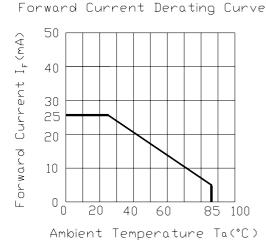

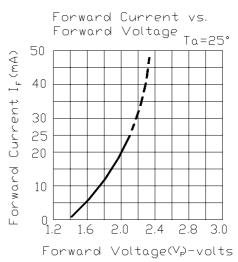

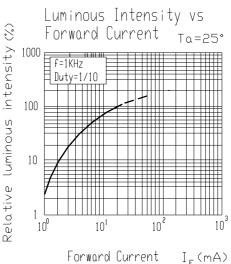



Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 4 of 9



## **Material Descriptions**

#### 28-21 SYGC / S530-XX / XXX

4

1 2 3

1.production part no.:28-21

2.chip part no.& epoxy color

AlGaInP = SYG...

C = water clear

3.chip size:s530(9mil)

chip rank:E1~E4

4.packing method:

(1)NONE,F8: Bulk

(2) TR8: Taping

### 28-21 SYGC/S530-XX/XXX

## **Label explanation**


**CAT: Luminous Intensity (mcd)** 

**HUE: Dom. Wavelength (nm)** 

**REF:** Forward Voltage (V)



### Reel & Carrier Tape Dimensions

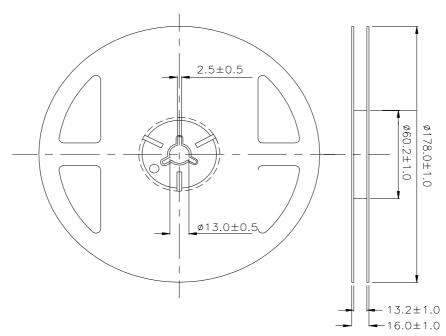

**Note:** Tolerances Unless Dimension is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. Device No.: SZDLE-282-013

http://www.everlight.com

Prepared date: 17-Aug-2005

Rev. 1


Page: 5 of 9

Prepared by: SKY



## 28-21 SYGC/S530-XX/XXX


## Loaded quantity per reel 1000 PCS/reel

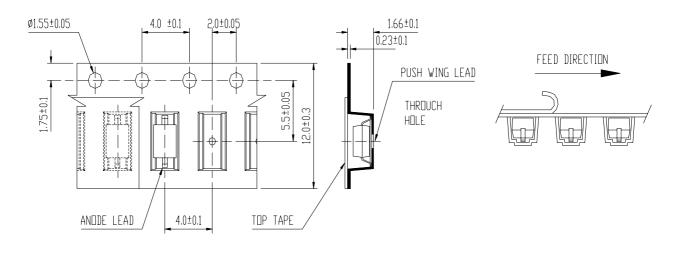

TR8

**Note:** Tolerances Unless Dimension is  $\pm 0.1$ mm, Unit = mm

## Moisture Resistant Packaging

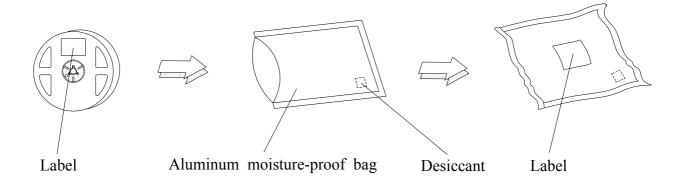

Rev. 1

Page: 6 of 9

Everlight Electronics Co., Ltd. http://www.everlight.com



## 28-21 SYGC/S530-XX/XXX

## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Rc
1	Reflow	Temp. : 240°C±5°C Min. 5 sec.	6 min.	22 Pcs.	0/1
2	Temperature Cycle	H:+100°C 15 min. ∫ 5 min. L:-40°C 15 min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	H:+100°C 5 min. ∫ 10 sec. L:-10°C 5 min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -55°℃	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C/RH 85%	1000 Hrs.	22 Pcs.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 7 of 9



#### 28-21 SYGC/S530-XX/XXX

#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
  - 2.3 The LEDs should be used within a year.
  - 2.4 After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
  - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
  - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
  - 3.1 Pb-free solder temperature profile

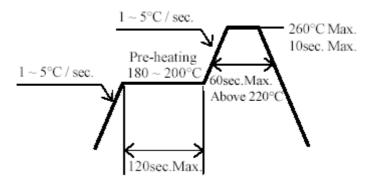

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 8 of 9



### 28-21 SYGC/S530-XX/XXX

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

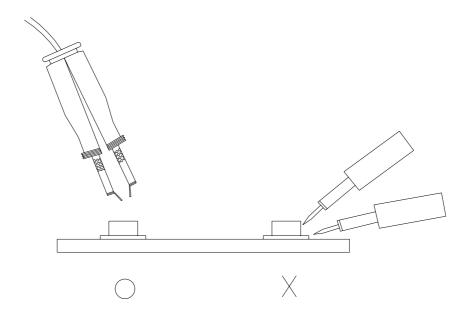

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 9 of 9