LIGHTING FOREVER

ÆRLIGHT

Technical Data Sheet

Chip LED with Right Angle Lens

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain with in RoHS compliant version

Descriptions

- The 12-215 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

Device Selection Guide

Dout No.	Chip	Emitted Color	Resin Color	
Part No.	Material	Emitted Color		
12-215/G6C-BP1Q2L/3C	AlGaInP	Brilliant Yellow Green	Water Clear	




12-215/G6C-BP1Q2L/3C



12-215/G6C-BP1Q2L/3C

Package Outline Dimensions

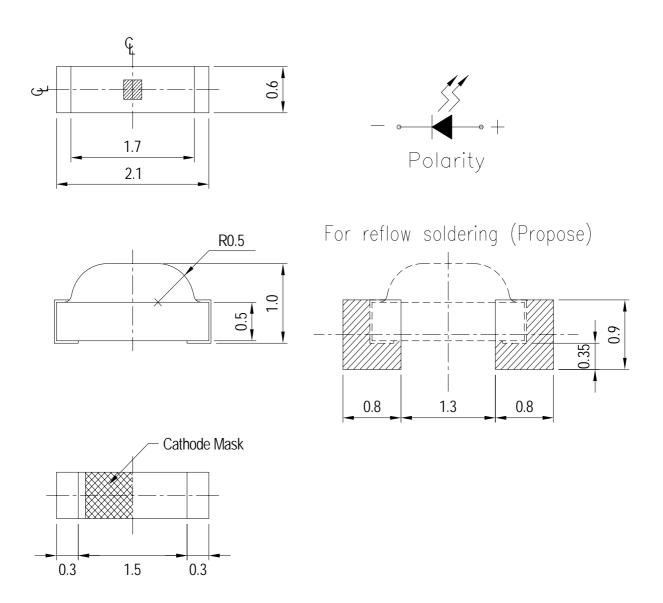

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No: DSE-0002386 http://www.everlight.com Prepared date: 16-Sep-2009 Rev:1 Page: 2 of 10 Prepared by: PAUL ÆRLIGHT

12-215/G6C-BP1Q2L/3C

Absolute Maximum Ratings (Ta=25°C)

E)

LIGHTING

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V _R	5	V	
Forward Current	\mathbf{I}_{F}	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA	
Power Dissipation	P _d	60	mW	
Electrostatic Discharge(HBM)	ESD	2000	V	
Operating Temperature	Topr	-40 ~ +85	°C	
Storage Temperature	Tstg	-40~ +90	°C	
Soldering Temperature	Tsol	Reflow Soldering : 260 $^{\circ}$ C for 10 sec. Hand Soldering : 350 $^{\circ}$ C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	45.0		112.0	mcd		
Peak Wavelength	λp		575		nm		
Dominant Wavelength	λd	567.5		575.5	nm		
Spectrum Radiation Bandwidth	$ riangle \lambda$		20		nm	I _F =20mA	
Viewing Angle	2 <i>θ</i> 1/2		130		deg		
Forward Voltage	V_{F}	1.70		2.30	V		
Reverse Current	I _R			10	μA	V _R =5V	

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.05V

12-215/G6C-BP1Q2L/3C

Bin Range Of Dom. Wavelength

FOREVER

EVERLIGHT

LIGHTING

Groups	Bin	Min	Max	Unit	Condition	
В	C15	567.5	569.5			
	C16	569.5	571.5		I 20 A	
	C17	571.5	573.5	nm	$I_F = 20 \text{mA}$	
	C18	573.5	575.5			

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition	
P1	45.0	57.0	mcd		
P2	57.0	72.0		I _F =20mA	
Q1	72.0	90.0			
Q2	90.0	112.0			

Bin Range Of Forward Voltage

Groups	Bin	Min	Max	Unit	Condition	
L	19	1.70	1.80			
	20	1.80	1.90	V	I _F =20mA	
	21	1.90	2.00			
	22	2.00	2.10			
	23	2.10	2.20			
	24	2.20	2.30			

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.05V


12-215/G6C-BP1Q2L/3C

Electro-Optical Characteristics (Ta=25°C)

EVERLIGHT

FOREVER

LIGHTING

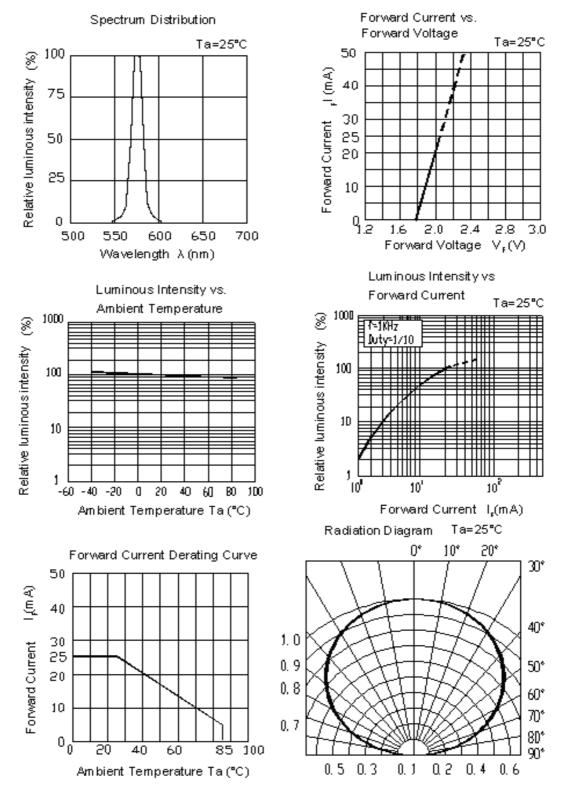

Everlight Electronics Co., Ltd. Device No: DSE-0002386 http://www.everlight.com Prepared date: 16-Sep-2009 Rev:1 Page: 5 of 10 Prepared by: PAUL

12-215/G6C-BP1Q2L/3C

Label explanation

LIGHTING

EVERLIGHT


CAT: Luminous Intensity Rank

FOREVER

- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



Reel Dimensions

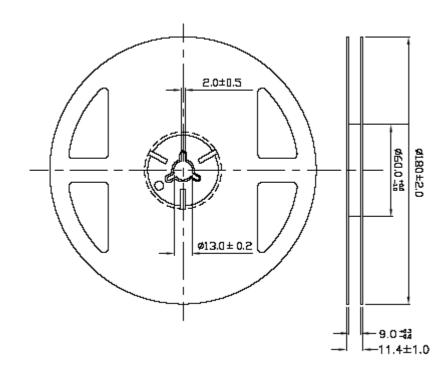


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No: DSE-0002386 http://www.everlight.com Prepared date: 16-Sep-2009 Rev:1 Page: 6 of 10 Prepared by: PAUL

12-215/G6C-BP1Q2L/3C

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

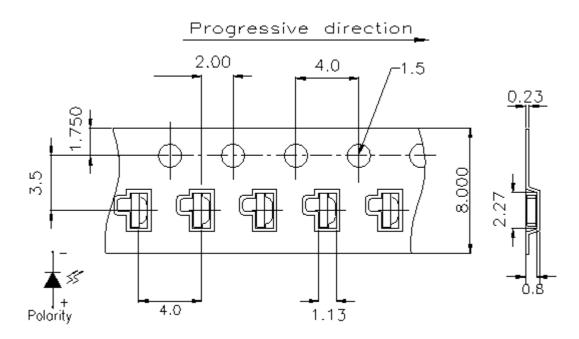

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm


Moisture Resistant Packaging

ÆRLIGHT

FOREVER

E

LIGHTING

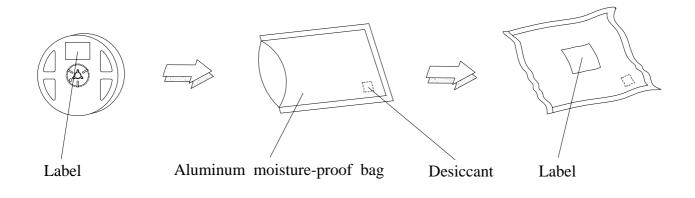



12-215/G6C-BP1Q2L/3C

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H: +100°C 15min $\int 5 \text{ min}$ L: -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min \int 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use

ERLIGHT


FOREVER

1. Over-current-proof

LIGHTING

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30° C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30℃ or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

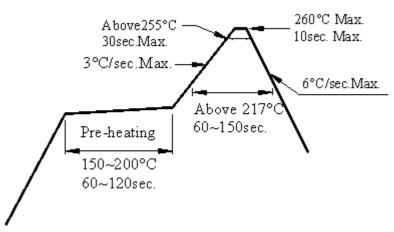

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

12-215/G6C-BP1Q2L/3C

4.Soldering Iron

LIGHTING


ERLIGHT

FOREVER

Each terminal is to go to the tip of soldering iron temperature less than 280° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

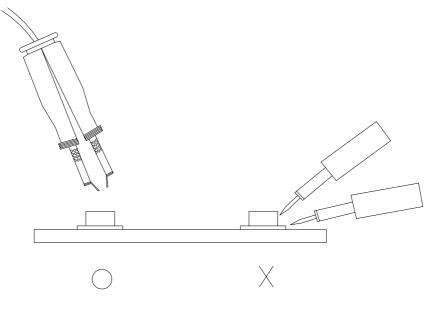

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No: DSE-0002386 http://www.everlight.com Prepared date: 16-Sep-2009 Rev:1 Page: 10 of 10 Prepared by: PAUL