# **Technical Data Sheet**

# **Chip LED with Inner Lens**

### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

#### Descriptions

- The 25-21 SMD Taping is much smaller than lead frame type components, thus it enables smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications, etc.

#### Applications


- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

## **Device Selection Guide**

	Chip		<b>Resin</b> Color	
Part No.	Material	Emitted Color		
25-21/BHC-APR/2T	InGaN	Blue	Water Clear	

Prepared date: 26-Apr.-2007 Prepared by: CaiXiangMei Release Date:2008-09-20 00:16:12.0


# 25-21/BHC-APR/2T





## **Package Outline Dimensions**

## 25-21/BHC-APR/2T

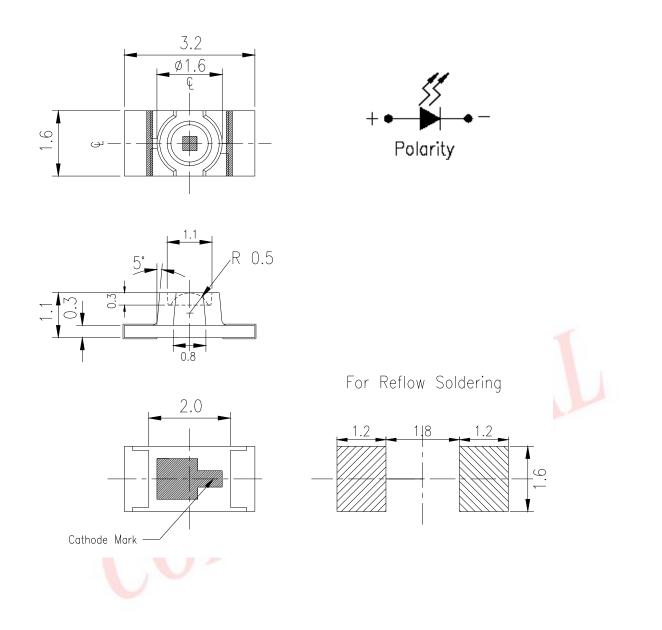

**Notes:** The tolerances unless mentioned are  $\pm 0.1$ , unit = mm.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 2 of 10 Device No.: SZDSE-251-B05 Prepared date: 26-Apr.-2007 Prepared by: CaiXiangMei Release Date:2008-09-20 00:16:12.0 Revision :1 LifecyclePhase:正式發行

## 25-21/BHC-APR/2T

#### Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit		
Reverse Voltage	V <sub>R</sub>	5	V		
Forward Current	$I_{\rm F}$	25	mA		
Peak Forward Current (Duty 1/10 @1KHz)	I <sub>FP</sub>	100	mA		
Power Dissipation	P <sub>d</sub>	110	mW		
Electrostatic Discharge(HBM)	ESD	150	V		
Operating Temperature	Topr	-40 ~ +85			
Storage Temperature	Tstg	-40 ~ +90			
Soldering Temperature	Tsol	Reflow Soldering: 260for 10secHand Soldering: 350for 3sec.			

#### Electro-Optical Characteristics (Ta=25 )

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	I <sub>V</sub>	45.0		180	mcd	
Viewing Angle	2 1/2		60	1	deg	
Peak Wavelength	р		468	11	nm	
Dominant Wavelength	d	464.5	y.	476.5	nm	I <sub>F</sub> =20mA
Spectrum Radiation Bandwidth			35		nm	
Forward Voltage	V <sub>F</sub>	2.7	3.3	3.7	V	
Reverse Current	I <sub>R</sub>			50	μA	V <sub>R</sub> =5V

#### Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

http://www.everlight.com

Rev. 1 Page: 3 of 10

Prepared date: 26-Apr.-2007 Prepared by: CaiXiangMei Release Date:2008-09-20 00:16:12.0

## 25-21/BHC-APR/2T

#### **Bin Range Of Dom. Wavelength**

Group	Bin	Min	Max	Unit	Condition
A	A9	464.5	467.5		I <sub>F</sub> =20mA
	A10	467.5	470.5	nm	
	A11	470.5	473.5		
	A12	473.5	476.5		

### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
Р	45.0	72.0		
Q	72.0	112	mcd	IF=20mA
R	112	180		

#### Notes:

1.Tolerance of Luminous Intensity ±11%


2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. Device No.: SZDSE-251-B05 Revision :1 LifecyclePhase:正式發行 http://www.everlight.com

Rev. 1 Page: 4 of 10

Prepared date: 26-Apr.-2007 Prepared by: CaiXiangMei Release Date:2008-09-20 00:16:12.0

## 25-21/BHC-APR/2T

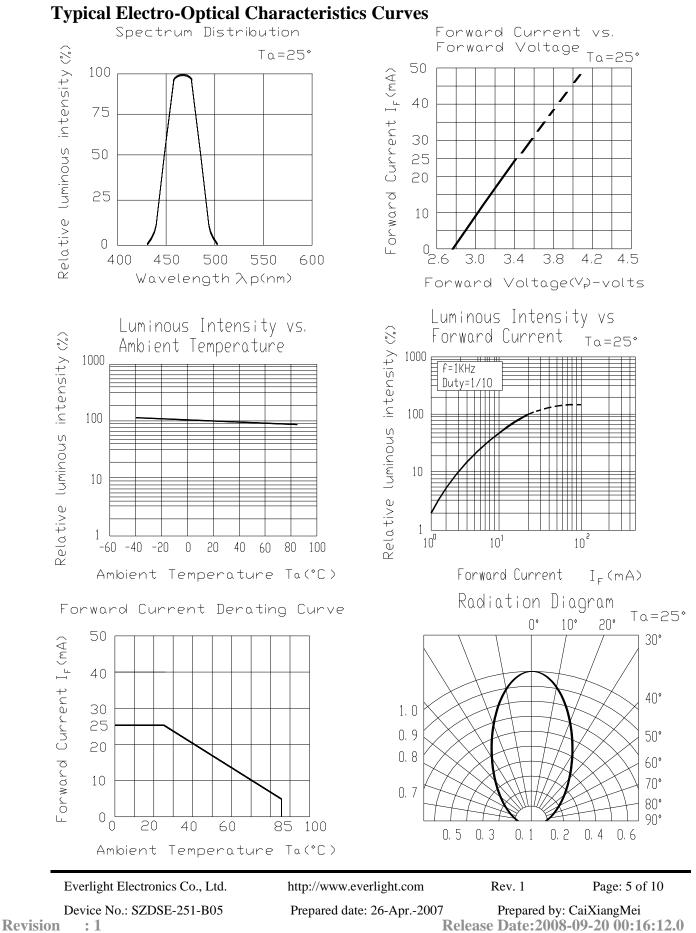


# LifecyclePhase:正式發行

# 25-21/BHC-APR/2T

#### Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



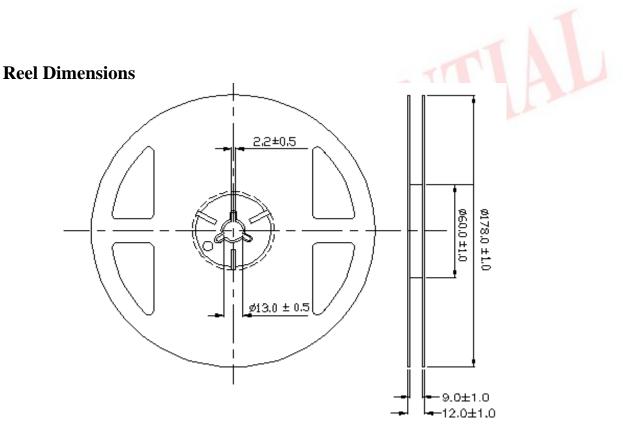


**Notes:** The tolerances unless mentioned are  $\pm 0.1$ , unit = mm.

Everlight Electronics Co., Ltd. Device No.: SZDSE-251-B05 Revision : 1 LifecyclePhase:正式發行 http://www.everlight.comRev. 1Page: 6 of 10Prepared date: 26-Apr.-2007Prepared by: CaiXiangMei

Release Date:2008-09-20 00:16:12.0


## 25-21/BHC-APR/2T


## **Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel**

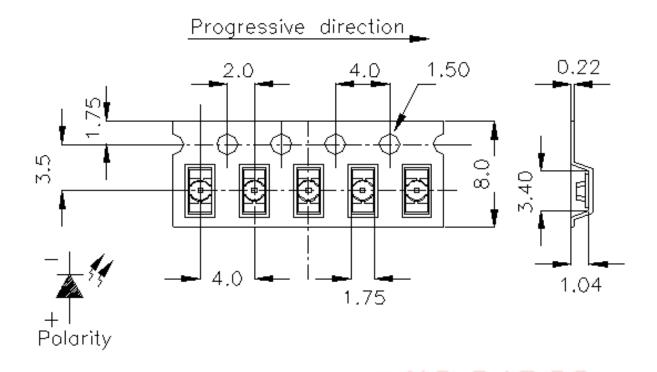


Note: The tolerances unless mentioned are  $\pm 0.1$ , unit=mm.

## **Moisture Resistant Packaging**





Aluminum moisture-proof bag



Everlight Electronics Co., Ltd. Device No.: SZDSE-251-B05 Revision : 1 LifecyclePhase:正式發行 http://www.everlight.comRev. 1Page: 7 of 10Prepared date: 26-Apr.-2007Prepared by: CaiXiangMei

Release Date:2008-09-20 00:16:12.0 Expired Period: Forever

## 25-21/BHC-APR/2T

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260 ±5 Min.5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	H : +100 15min 5 min L : -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100 5min 10 sec L : -10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 /85%R.H.	1000 Hrs.	22 PCS.	0/1

http://www.everlight.com

Rev. 1 Page: 8 of 10

Prepared date: 26-Apr.-2007 Prepared by: CaiXiangMei Release Date:2008-09-20 00:16:12.0

# 25-21/BHC-APR/2T

### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less.

If unused LEDs remain, it should be stored in moisture proof packages.

- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5 for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

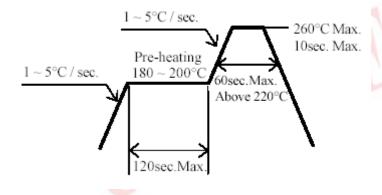

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Release Date:2008-09-20 00:16:12.0


# 25-21/BHC-APR/2T

#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

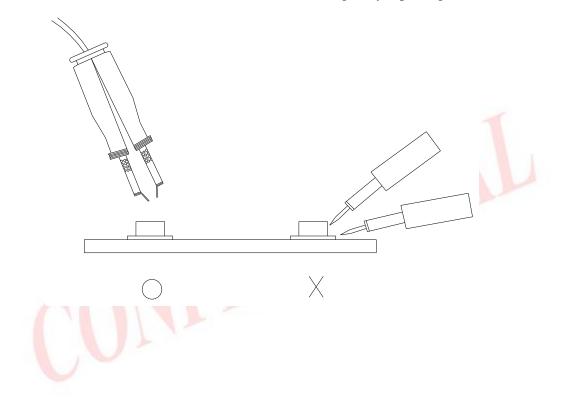

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

Everlight Electronics Co., Ltd. Device No.: SZDSE-251-B05 Revision :1 LifecyclePhase:正式發行 http://www.everlight.com

Prepared date: 26-Apr.-2007

Rev. 1 Page: 10 of 10

Prepared by: CaiXiangMei Release Date:2008-09-20 00:16:12.0