1.8mm BI-LEVEL CIRCUIT BOARD INDICATOR

Part Number: WP4060VH/2YD

Yellow


Features

- Pre-trimmed leads for pc mounting.
- Black case enhances contrast ratio.
- Wide viewing angle.
- High reliability life measured in years.
- Housing UL rating:94V-0.
- Housing material: type 66 nylon.
- RoHS compliant.

Description

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

Package Dimensions

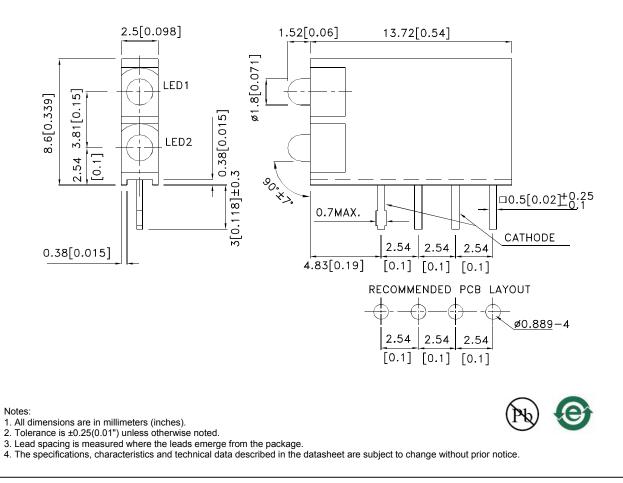

SPEC NO: DSAE9385 **APPROVED: WYNEC**

REV NO: V.11B **CHECKED: Allen Liu**

DATE: MAR/19/2013 DRAWN: Q.M.Chen

PAGE: 1 OF 5 ERP: 1102013561

Selection Guide

Selection Guide					
Part No.	Dice	Lens Type	lv (mcd) [2] @ 10mA		Viewing Angle [1]
			Min.	Тур.	201/2
WP4060VH/2YD	Yellow (GaAsP/GaP)	Yellow Diffused	4	8	70°

Notes:

θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
Luminous intensity/ luminous Flux: +/-15%.
Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Yellow	590		nm	I⊧=20mA
λD [1]	Dominant Wavelength	Yellow	588		nm	I⊧=20mA
Δλ1/2	Spectral Line Half-width	Yellow	35		nm	I⊧=20mA
С	Capacitance	Yellow	20		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Yellow	2.1	2.5	V	l⊧=20mA
lr	Reverse Current	Yellow		10	uA	VR = 5V

Notes:

1.Wavelength: +/-1nm.

2. Forward Voltage: +/-0.1V.

3. Wavelength value is traceable to the CIE127-2007 compliant national standards.

Absolute Maximum Ratings at TA=25°C


Parameter	Yellow	Units		
Power dissipation	75	mW		
DC Forward Current	30	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	260°C For 5 Seconds			


Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 2mm below package base.


3. 5mm below package base.

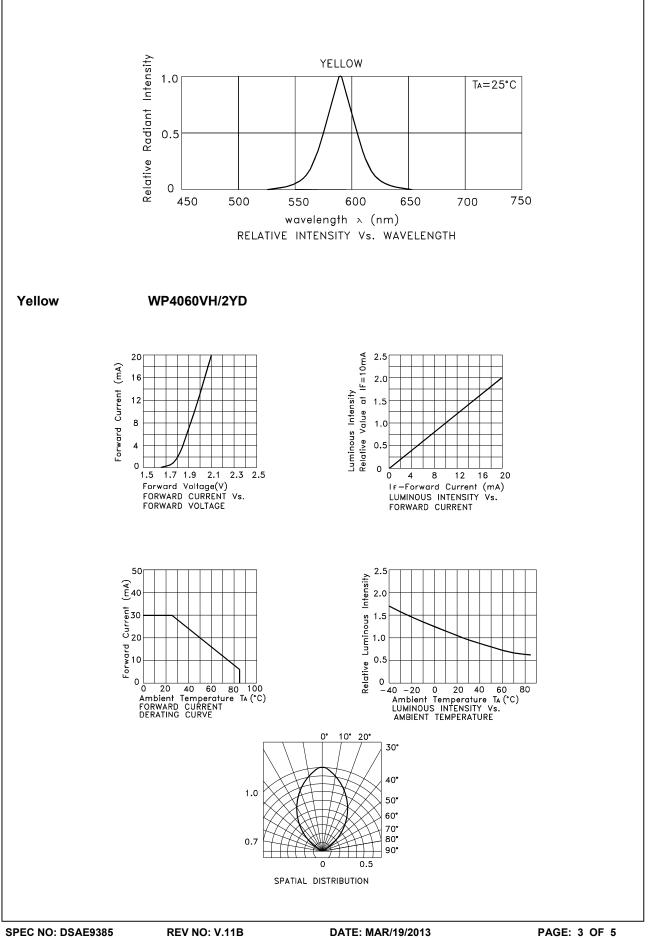

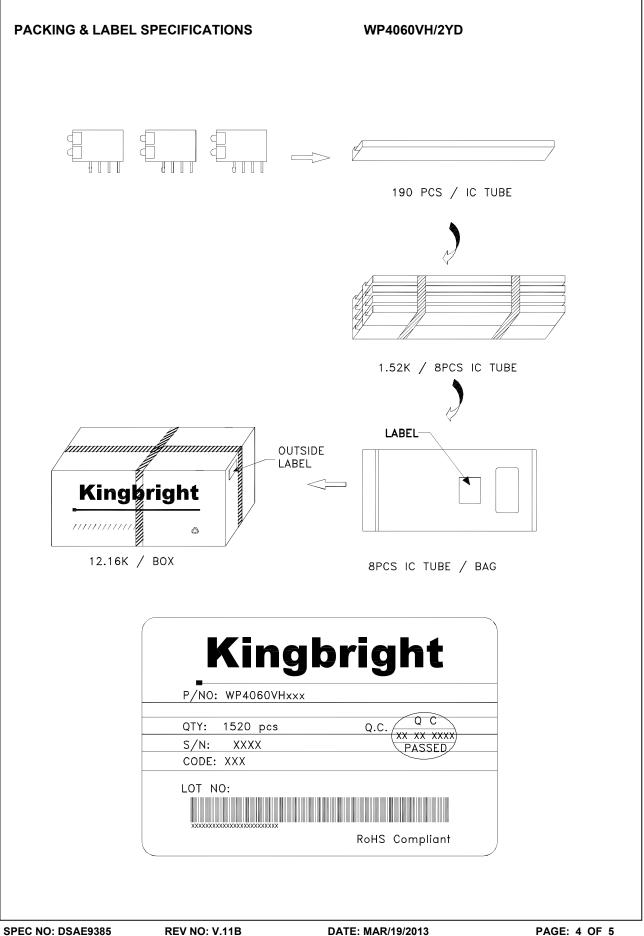

PRECAUTIONS

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead—forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures.

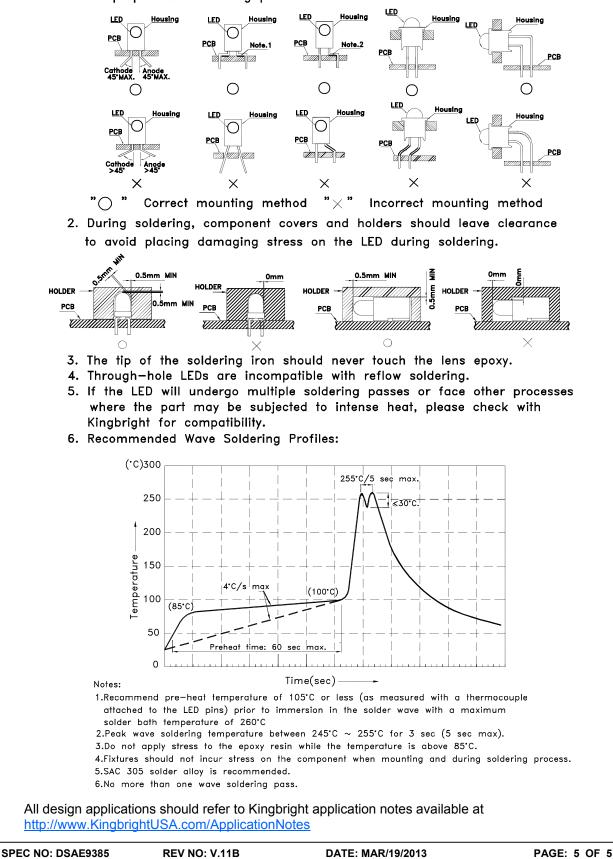

REV NO: V.11B CHECKED: Allen Liu DATE: MAR/19/2013 DRAWN: Q.M.Chen