



Spec No.: DS22-2012-0044 Effective Date: 04/11/2012 Revision: B



BNS-OD-FC001/A4


LITE-ON Technology Corp. / Optoelectronics No.90,Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C. Tel: 886-2-2222-6181 Fax: 886-2-2221-1948 / 886-2-2221-0660 http://www.liteon.com/opto

#### Property of Lite-On Only

#### Features

- \* Meet RoHS, Green Product.
- \* Side looking special for LCD backlight.
- \* Ultra bright InGaN White Chip LED with Tin plating
- \* Package in 8mm tape on 7" diameter reels.
- \* Compatible with automatic placement equipment.
- \* Compatible with infrared reflow solder process.
- \* EIA STD package.
- \* I.C. compatible.

#### Package Dimensions

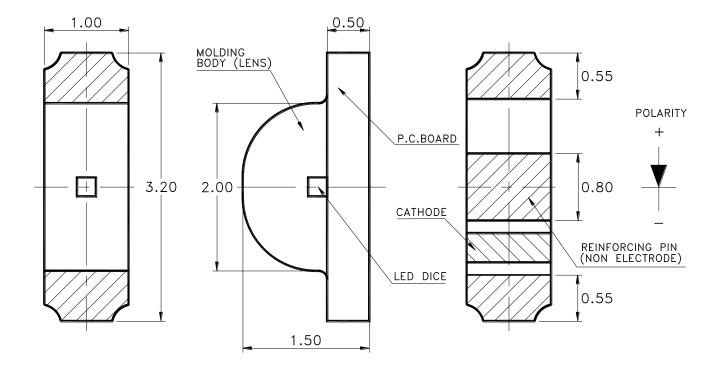

Part No.	Lens	Emitted Color
LTW-S111TLA	Yellow	InGaN White

11

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm$  0.10 mm (.004") unless otherwise noted.

#### Property of Lite-On Only


#### Absolute Maximum Ratings At Ta=25 °C

Parameter	LTW-S111TLA	Unit	
Farameter	LIW-SIIIILA	UIIIt	
Power Dissipation	70	mW	
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA	
DC Forward Current	20	mA	
Operating Temperature Range	-20°C to + 80°C		
Storage Temperature Range	$-30^{\circ}$ C to $+85^{\circ}$ C		
Infrared Soldering Condition	260°C For 10 Seconds		

Note: Operating the LED (in an application) under reverse bias condition might result in damage

or failure of the component.

Suggest IR Reflow Condition :

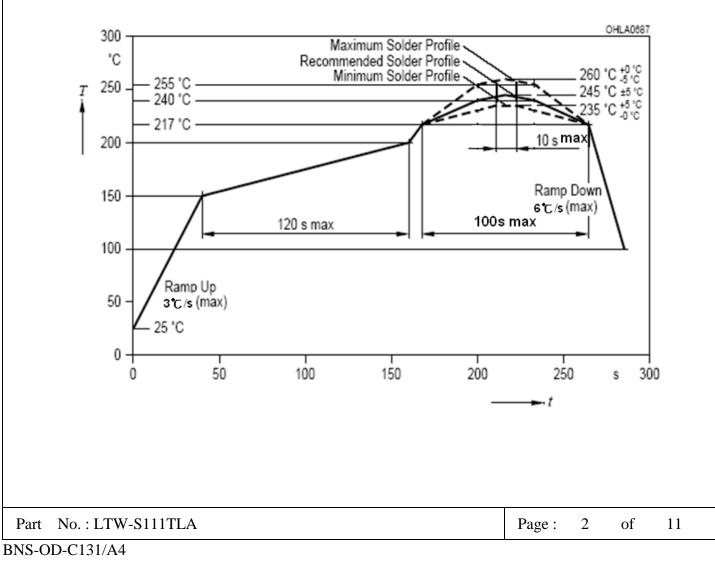

# LITE-ON TECHNOLOGY CORPORATION

Property of Lite-On Only

Parameter	Symbol	Part No. LTW-	Min.	Тур.	Max.	Unit	Test Condition
Luminous Intensity	IV	S111TLA	112.0		224.0	mcd	IF = 10mA Note 1, 2, 5
Viewing Angle	2 <i>θ</i> 1/2	S111TLA		130		deg	Fig.6
	Х			0.310			IF = 10mA
Chromaticity Coordinates	У	S111TLA		0.320			Note 3, 5 Fig.1
Forward Voltage	VF	S111TLA	2.70		3.10	V	IF = 10mA
Reverse Current	IR	S111TLA			10	μΑ	VR = 5V Note 7

#### **Electrical Optical Characteristics At Ta=25** °C

LITEON

Note : 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

- 2. Iv classification code is marked on each packing bag.
- 3. The chromaticity coordinates (x, y) is derived from the 1931 CIE chromaticity diagram.
- 4. Caution in ESD:


Static Electricity and surge damages the LED. It is recommend to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

- 5. Tester CAS140B is for the chromaticity coordinates (x, y) & IV.
- 6. The chromaticity coordinates (x, y) guarantee should be added  $\pm$  0.01 tolerance.
- 7. Reverse voltage (VR) condition is applied to IR test only. The device is not designed for reverse operation

Part No. : LTW-S111TLA	Page :	3	of	11	
------------------------	--------	---	----	----	--

### LITE-ON TECHNOLOGY CORPORATION

Property of Lite-On Only

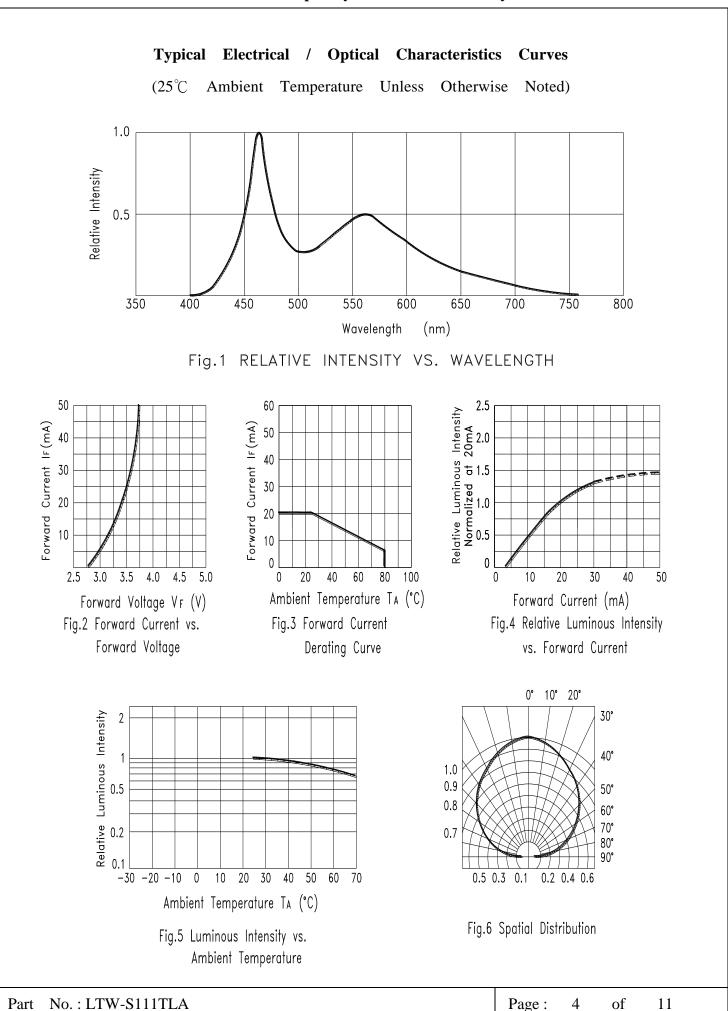

BNS-OD-C131/A4

LITEON

### Property of Lite-On Only

#### **Bin Code List**

VF Spec Table

VF Bin	Forward Voltage (V) at $IF = 10mA$		
VI DIII	Min.	Max.	
1	2.70	2.80	
2	2.80	2.90	
3	2.90	3.00	
4	3.00	3.10	

Tolerance on each Forward Voltage bin is +/-0.1 volt


#### IV Spec. Table

IV Bin	Luminous Intensity	(mcd) at IF = 10mA
	Min.	Max.
R	112.0	168.0
S	168.0	224.0

Tolerance on each Luminous Intensity bin is +/- 15%.

Hue Spec. Table						
Hue Bin	Color bin limits at IF = 10mA					
nue bili		CIE 1931Chromaticity coordinates				
AO	Х	0.280	0.296	0.283	0.264	
AU	У	0.248	0.276	0.305	0.267	
B3	Х	0.287	0.307	0.304	0.283	
<b>D</b> 5	У	0.295	0.315	0.330	0.305	
B4	Х	0.307	0.330	0.330	0.304	
D4	у	0.315	0.339	0.360	0.330	
В5	Х	0.296	0.311	0.307	0.287	
БЭ	у	0.276	0.294	0.315	0.295	
B6	Х	0.311	0.330	0.330	0.307	
DU	У	0.294	0.318	0.339	0.315	
C0	Х	0.330	0.356	0.361	0.330	
0	у	0.318	0.351	0.385	0.360	

Tolerance on each Hue (x, y) bin is +/-0.01.

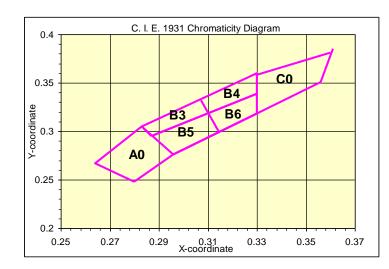

BNS-OD-C131/A4

5 Page : of

11


## LITEON LITE-ON TECHNOLOGY CORPORATION Property of Lite-On Only

#### Cleaning

Do not use unspecified chemical liquid to clean LED they could harm the package. If clean is necessary, immerse the LED in ethyl alcohol or in isopropyl alcohol at normal temperature for less one minute.

#### **Suggest Soldering Pad Dimensions**


#### **Suggest Soldering direction:**

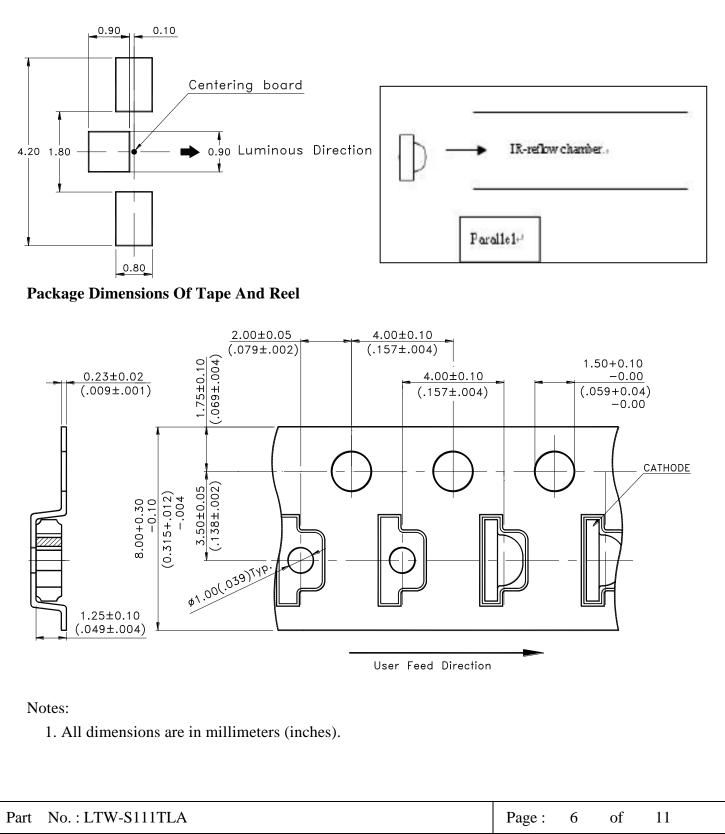


#### BNS-OD-C131/A4

# LITEON LITE-ON TECHNOLOGY CORPORATION Property of Lite-On Only

**Package Dimensions of Reel** 

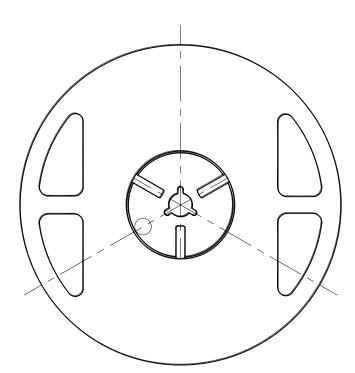

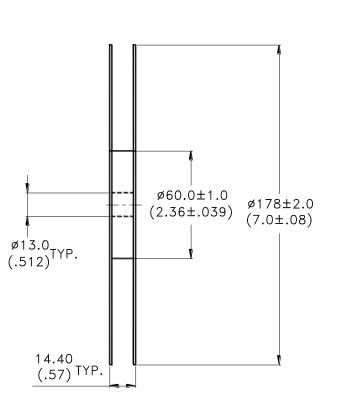

#### Notes:

- 1. Empty component pockets sealed with top cover tape.
- 2. 7 inch reel-3000 pieces per reel.
- 3. Minimum packing quantity is 500 pcs for remainders.
- 4. The maximum number of consecutive missing lamps is two.
- 5. In accordance with ANSI/EIA 481-1 specifications.

Property of Lite-On Only

### CAUTIONS

#### 1. Application

The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications).Consult Liteon's Sales in advance for information on applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).

#### 2. Storage

The package is sealed:

The LEDs should be stored at 30°C or less and 90%RH or less. And the LEDs are limited to use within one year, while the LEDs is packed in moisture-proof package with the desiccants inside.

The package is opened:

The storage ambient for the LEDs should not exceed 30°C temperature or 60% relative humidity.

It is recommended that LEDs out of their original packaging are IR-reflowed within one week.

For extended storage out of their original packaging, it is recommended that the LEDs be stored in a sealed container with appropriate desiccant, or in a desiccators with nitrogen ambient.

LEDs stored out of their original packaging for more than one week should be baked at about 60 deg C for at least 20 hours before solder assembly.

#### 3. Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED if necessary.

#### 4. Soldering

#### **Recommended soldering conditions:**

Ret	low soldering	Soldering iron		
Pre-heat	150~200°C	Temperature	300°C Max.	
Pre-heat time	120 sec. Max.	Soldering time	3 sec. Max.	
Peak temperature	260°C Max.		(one time only)	
Soldering time	10 sec. Max.(Max. two times)			

#### Soldering notes:

Because different board designs use different number and types of devices, solder pastes, reflow ovens, and circuit boards, no single temperature profile works for all possible combinations.

However, you can successfully mount your packages to the PCB by following the proper guidelines and PCB-specific characterization.

LITE-ON Runs both component-level verification using in-house **KYRAMX98** reflow chambers and board-level assembly.

The results of this testing are verified through post-reflow reliability testing.

Profiles used at LITE-ON are based on JEDEC standards to ensure that all packages can be successfully and reliably surface mounted.

Figure on page3 shows a sample temperature profile compliant to JEDEC standards.

You can use this example as a generic target to set up your reflow process.

You should adhere to the JEDEC profile limits as well as specifications and recommendations from the solder paste manufacturer to avoid damaging the device and create a reliable solder joint.

Part No. : LTW-S111TLA	Page :	8	of	11	
------------------------	--------	---	----	----	--

## LITEON LITE-ON TECHNOLOGY CORPORATION Property of Lite-On Only

#### 5. Drive Method

An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.



(A) Recommended circuit.

(B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

#### 6. ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED. Suggestions to prevent ESD damage:

- Use of a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- All devices, equipment, and machinery must be properly grounded.
- Work tables, storage racks, etc. should be properly grounded.
- Use ion blower to neutralize the static charge which might have built up on surface of the LED's plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or "no lightup" at low currents.

To verify for ESD damage, check for "lightup" and Vf of the suspect LEDs at low currents. The Vf of "good" LEDs should be  $\geq 2.0V@0.1$ mA for InGaN product and  $\geq 1.4V@0.1$ mA for AlInGaP product.

#### Property of Lite-On Only

#### 7. Reliability Test

Classification	Test Item	Test Condition	Reference Standard
	Operation Life	Ta= Under Room Temperature *Test Time= 500HRS (-24HRS,+72HRS)@10mA	MIL-STD-750D:1026 MIL-STD-883D:1005 JIS C 7021:B-1
Endurance Test	High Temperature High Humidity Storage	Ta= $65\pm5^{\circ}$ C,RH= 90~95% *Test Time= 240HRS±2HRS	MIL-STD-202F:103B JIS C 7021:B-11
	High Temperature Storage	Ta= 105±5℃ *Test Time= 500HRS (-24HRS,+72HRS)	MIL-STD-883D:1008 JIS C 7021:B-10
	Low Temperature Storage	Ta= -55±5°C *Test Time=500HRS (-24HRS,+72H RS)	JIS C 7021:B-12
	Temperature Cycling	$105^{\circ}$ C ~ $25^{\circ}$ C ~ $-55^{\circ}$ C ~ $25^{\circ}$ C 30mins 5mins 30mins 5mins 10 Cycles	MIL-STD-202F:107D MIL-STD-750D:1051 MIL-STD-883D:1010 JIS C 7021:A-4
	Thermal Shock	$\begin{array}{rcl} 85 \pm 5^{\circ} \ensuremath{\mathbb{C}} & \sim & -30^{\circ} \ensuremath{\mathbb{C}} & \pm 5^{\circ} \ensuremath{\mathbb{C}} \\ 30 \text{mins} & 30 \text{mins} & 10 \ensuremath{\text{Cycles}} \end{array}$	MIL-STD-202F:107D MIL-STD-750D:1051 MIL-STD-883D:1011
E	Solder Resistance	T.sol= $260 \pm 5^{\circ}$ C Dwell Time= $10 \pm 1$ secs	MIL-STD-202F:210A MIL-STD-750D:2031 JIS C 7021:A-1
Environmental Test	IR-Reflow	Ramp-up rate(217°C to Peak) +3°C/ second max Temp. maintain at $175(\pm 25)$ °C 180 seconds max Temp. maintain above 217°C 60-150 seconds Peak temperature range 260°C +0/-5°C Time within 5°C of actual Peak Temperature (tp) 10-30 seconds Ramp-down rate +6°C/second max	MIL-STD-750D:2031.2 J-STD-020D
	Solderability	T.sol= $235 \pm 5^{\circ}$ C Immersion time 2±0.5 sec Immersion rate 25±2.5 mm/sec Coverage $\geq 95\%$ of the dipped surface	MIL-STD-202F:208D MIL-STD-750D:2026 MIL-STD-883D:2003 IEC 68 Part 2-20 JIS C 7021:A-2

#### 8. Others

The appearance and specifications of the product may be modified for improvement without prior notice.

#### Property of Lite-On Only

#### 9. Suggested Checking List

#### Training and Certification

- 1. Everyone working in a static-safe area is ESD-certified?
- 2. Training records kept and re-certification dates monitored?

Static-Safe Workstation & Work Areas

- 1. Static-safe workstation or work-areas have ESD signs?
- 2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
- 3. All ionizer activated, positioned towards the units?
- 4. Each work surface mats grounding is good?

#### Personnel Grounding

- 1. Every person (including visitors) handling ESD sensitive (ESDS) items wears wrist strap, heel strap or conductive shoes with conductive flooring?
- 2. If conductive footwear used, conductive flooring also present where operator stand or walk?
- 3. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V\*?
- 4. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
- 5. All wrist strap or heel strap checkers calibration up to date? Note: \*50V for Blue LED.

#### Device Handling

- 1. Every ESDS items identified by EIA-471 labels on item or packaging?
- 2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
- 3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
- 4. All flexible conductive and dissipative package materials inspected before reuse or recycles?

#### Others

- 1. Audit result reported to entity ESD control coordinator?
- 2. Corrective action from previous audits completed?
- 3. Are audit records complete and on file?