



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDT-316-004 REV: 1.1

## 0.36" Triple Digit Displays

PART NO. : ELT-316GWB/P19 ECN : \_\_\_\_\_ Page: 1/5

### ■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

### ■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

### ■ Descriptions :

- The ELT-316 series is a large 9.2 mm (0.36")high seven segment display designed for viewing distances up to 7 meters.
- These displays provide excellent reliability in bright ambient light.
- These devices are made with white segments and black surface.

PART NO.	Chip	
	Material	Emitted Color
ELT-316GWB/P19	GaP	Green

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.


TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306


<http://www.everlight.com>



0.36" Triple Digit Displays

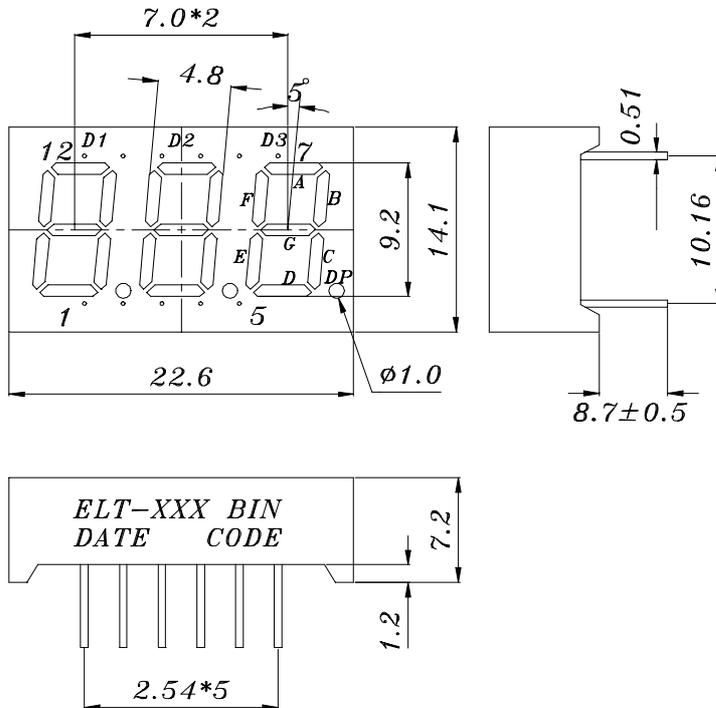PART NO. : ELT-316GWB/P19ECN : \_\_\_\_\_ Page: 2/5**Package Dimension:****COMMON ANODE**

1. CATHODE E
2. CATHODE D
3. CATHODE DP
4. CATHODE C
5. CATHODE G
6. NO PIN
7. CATHODE B
8. COMMON ANODE D3
9. COMMON ANODE D2
10. CATHODE F
11. CATHODE A
12. COMMON ANODE D1

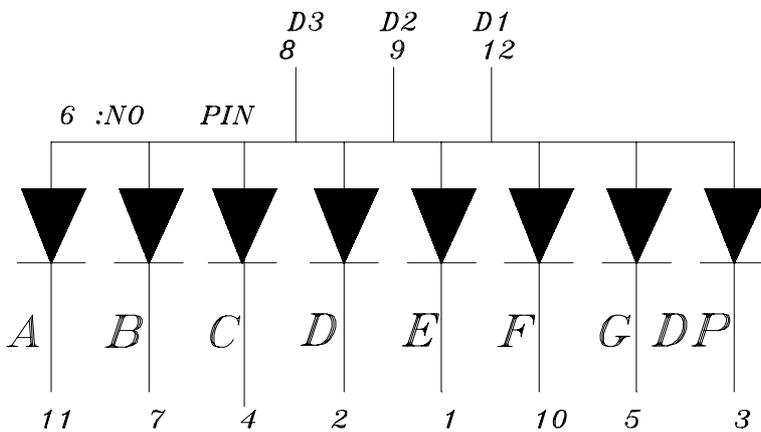**Notes:**

1. All dimensions are in millimeters, tolerance is 0.25mm unless otherwise noted.
  2. Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



Device Number : DDT-316-004 REV: 1.1

0.36" Triple Digit Displays

PART NO. : ELT-316GWB/P19 ECN : \_\_\_\_\_ Page: 3/5

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	30	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	IF(Peak)	160	mA

■ Electronic optical characteristics :

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Per segment	Iv	0.75	1.20	----	mcd	IF=10mA
	Per decimal point		0.30	0.50	----		
Peak Wavelength		λ p	----	565	----	nm	IF=20mA
Dominant Wavelength		λ d	----	570	----	nm	IF=20mA
Spectrum Radiation Bandwidth		△ λ	----	30	----	nm	IF=20mA
Forward Voltage		VR	1.7	2.1	2.4	V	IF=20mA
Reverse Current		IR	----	----	10	μ A	VR=5V



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDT-316-004

REV: 1.1

0.36" Triple Digit Displays




PART NO. : ELT-316GWB/P19

ECN :                     

Page: 4/5

## Typical Electro-Optical Characteristic Curves:

GHIP Material:Gap  
Emitted Color:Yellow Green

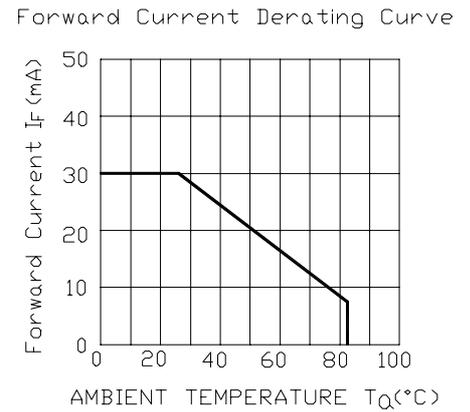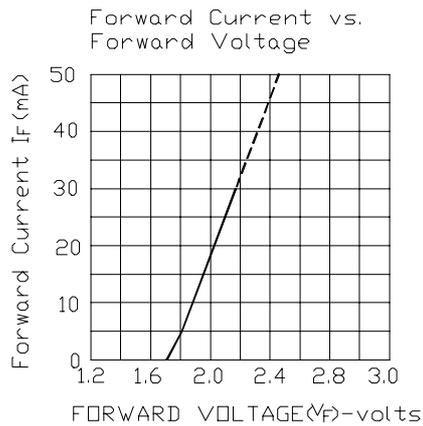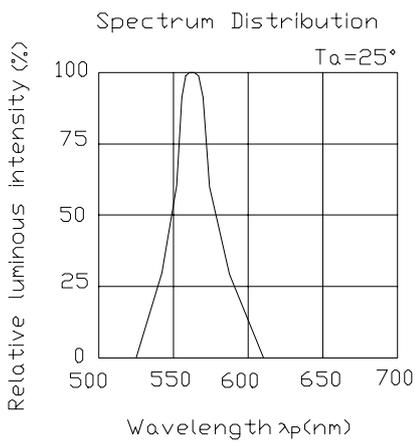



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDT-316-004 REV: 1.1

0.36" Triple Digit Displays

PART NO. : ELT-316GWB/P19 ECN :                      Page: 5/5

■ Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	IF = 10 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C /85% RH	1000 HRS	76 PCS	0/1

